

COMMERCIAL LIGHTING



BMT
modern lighting


Design & Manufacture


**EXPERT OF LED
COMMERCIAL LIGHTING**





BMT
modern lighting

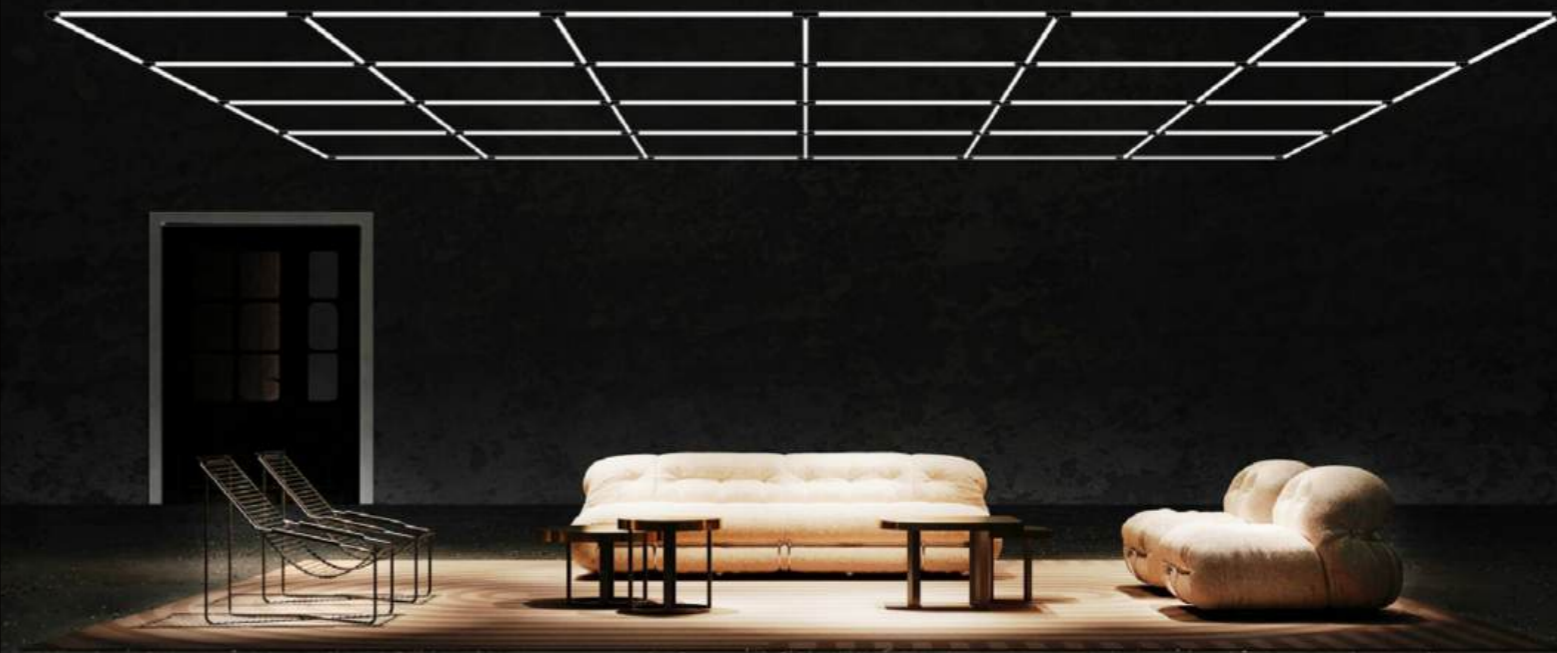

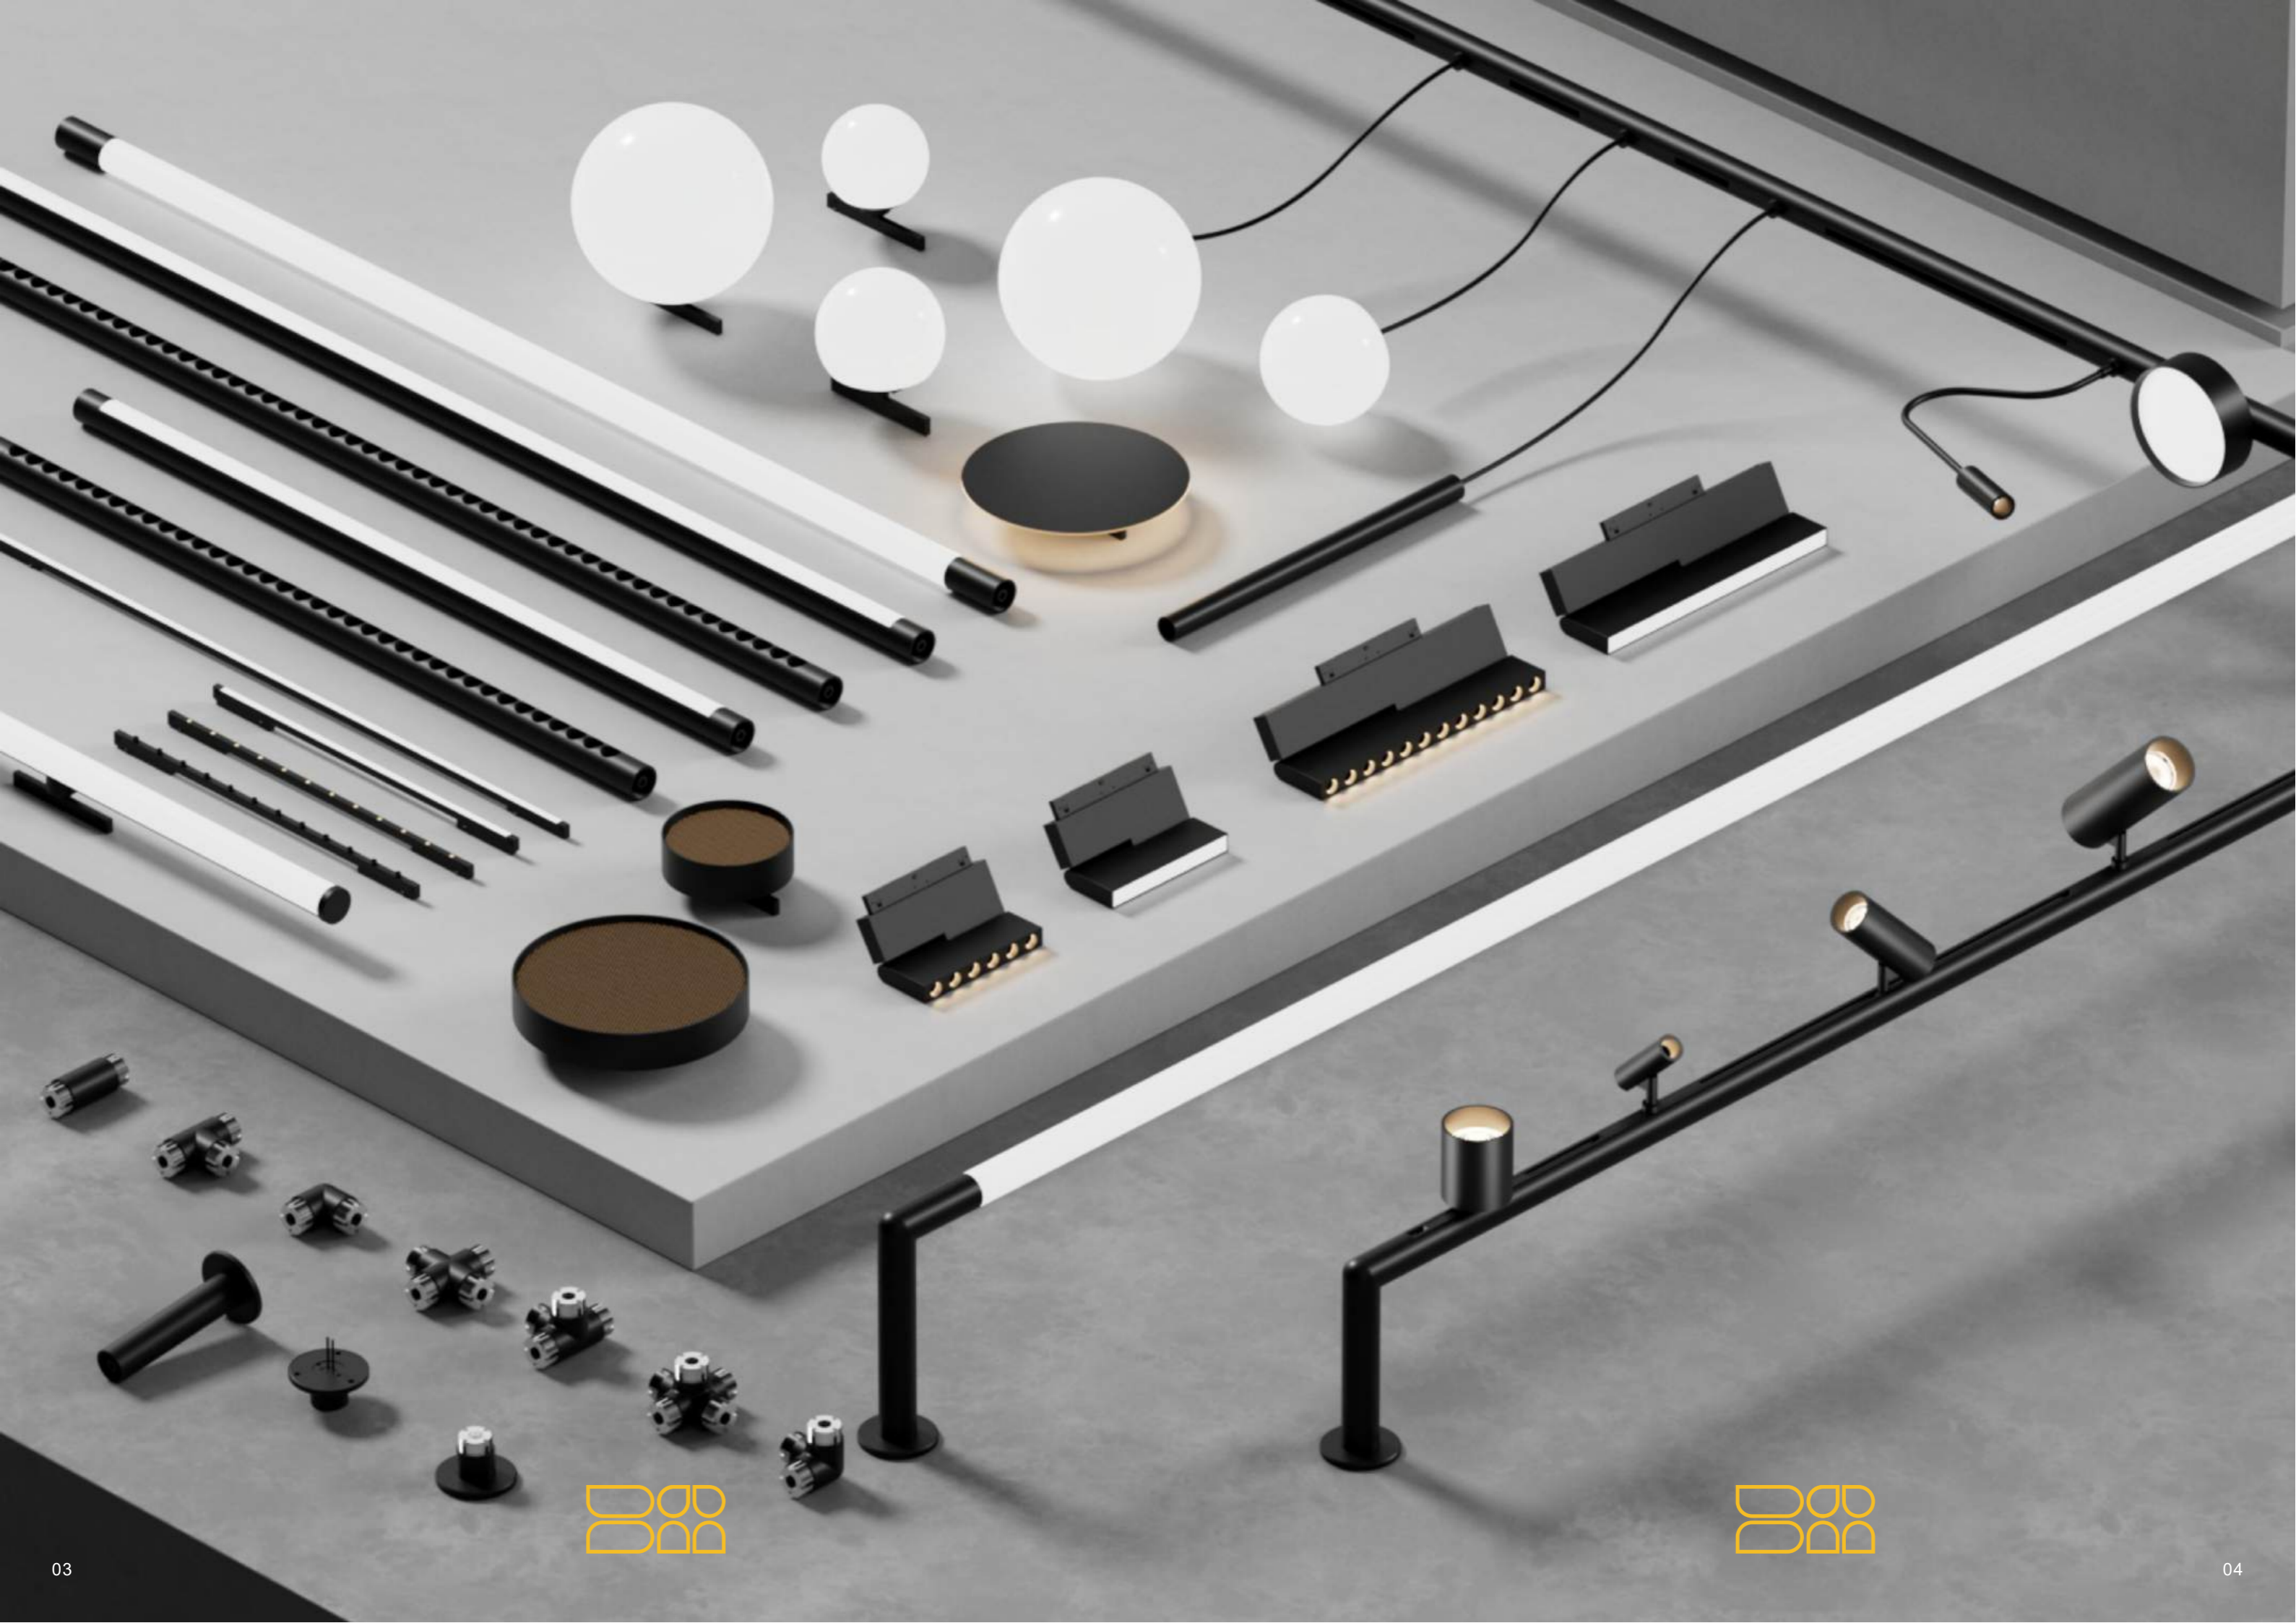

TB system fulfils a wide range of lighting requirements with just one system. It can be combine with TB-DFS, TB-GLR and TB-PC these linear luminaires achive for a special effect. For optimum office lighting, TB-track can be combine with Nano (5mm) system luminaires inserts for even more flexibility in lighting design.



Material - Extruded aluminum profile
Surface treatment - Available in white, black
Powder coating of other colors, can be customized upon request. You Can cut by yourself
Size - Diameter 26.6*Length 1000/1500/2000 Other sizes can be customized upon request.



Material - Extruded aluminum profile with built-in pure copper wire guide
Surface treatment - Available in white, black
Powder coating of other colors, customizable upon request.
Size - Diameter 26.6*Length 1020/1500/2000 Other sizes can be customized upon request.



Material - aluminium extruded
Finished - with selection of white, black & other colors powder coating finishes on requested.
Wattage - 8/16/24W
Beam Angle - 36 °
CCT- 3000K 4000K 5000K
Size - L374*D26.6/L700*D26.6/L1020*D26.6




Material - aluminium extruded
Finished - with selection of white, black & other colors powder coating finishes on requested.
Wattage - 8/16/24W
Beam Angle - 120 °
CCT- 3000K 4000K 5000K
Size - L374*D26.6/L700*D26.6/L1020*D26.6



Material - aluminium extruded
Finished - with selection of white, black & other colors powder coating finishes on requested.
Wattage - 6/12/18W
Beam Angle - 360 °
CCT- 3000K 4000K 5000K
Size - L374*D26.6/L700*D26.6/L1020*D26.6

The pipes are connected electrically and mechanically by simply twisting and inserting. This makes the installation of complex lighting systems extremely simple, fast and straightforward.

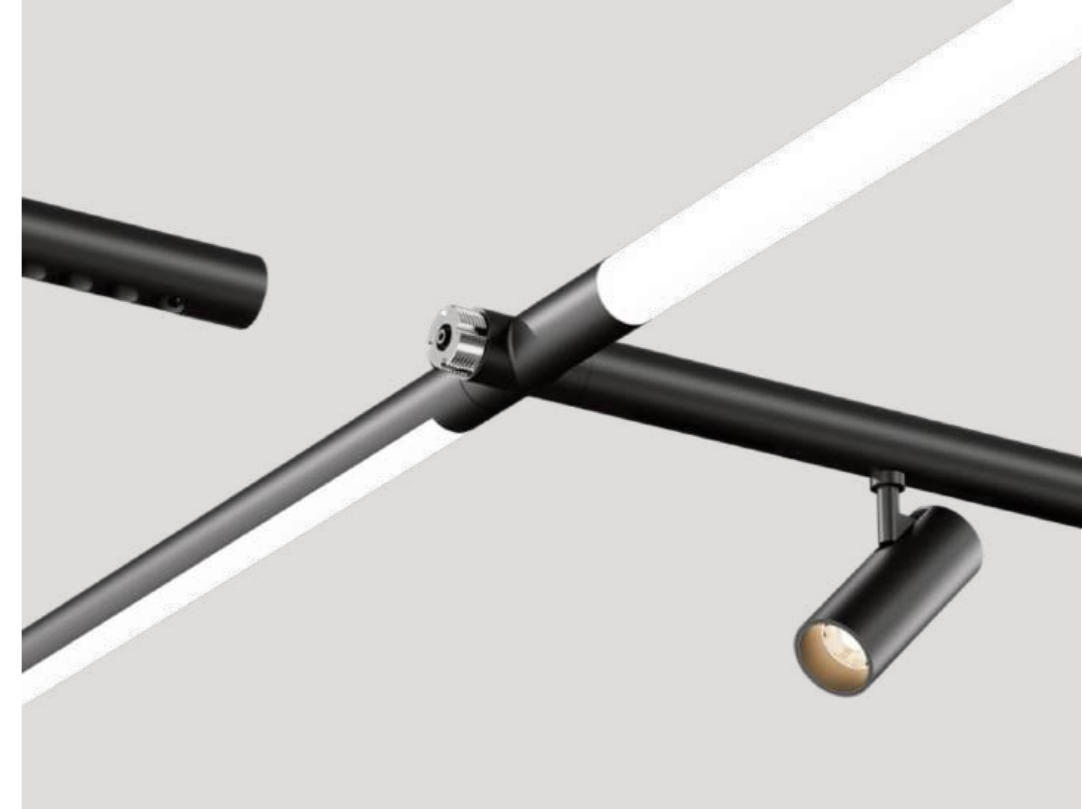

TUBO system luminaires offer 360 ° light distribution and opalescent shades for even illumination and slightly brighter areas. This makes them ideal for locations that require comfortable ambient lighting



Thanks to the wide range of mechanical and electrical connection elements such as I-type, L-type, T-type, X-type and 4D connectors, there is a high degree of design freedom. Geometric shapes, fascinating light sculptures and the need to meet different spatial requirements can be easily realized.



BMT
modern lighting



Material
Aluminum



Material
Aluminum



Material
Aluminum



Material
Aluminum



Material
Aluminum



Material
Aluminum



Material
Aluminum



Material
Aluminum



Material
Aluminum




Material
Aluminum



Material
Aluminum




Material
Aluminum



Material
Aluminum



360° rotating connector to control the direction of the light. It can also form countless shapes, making the scene design more rich and free.

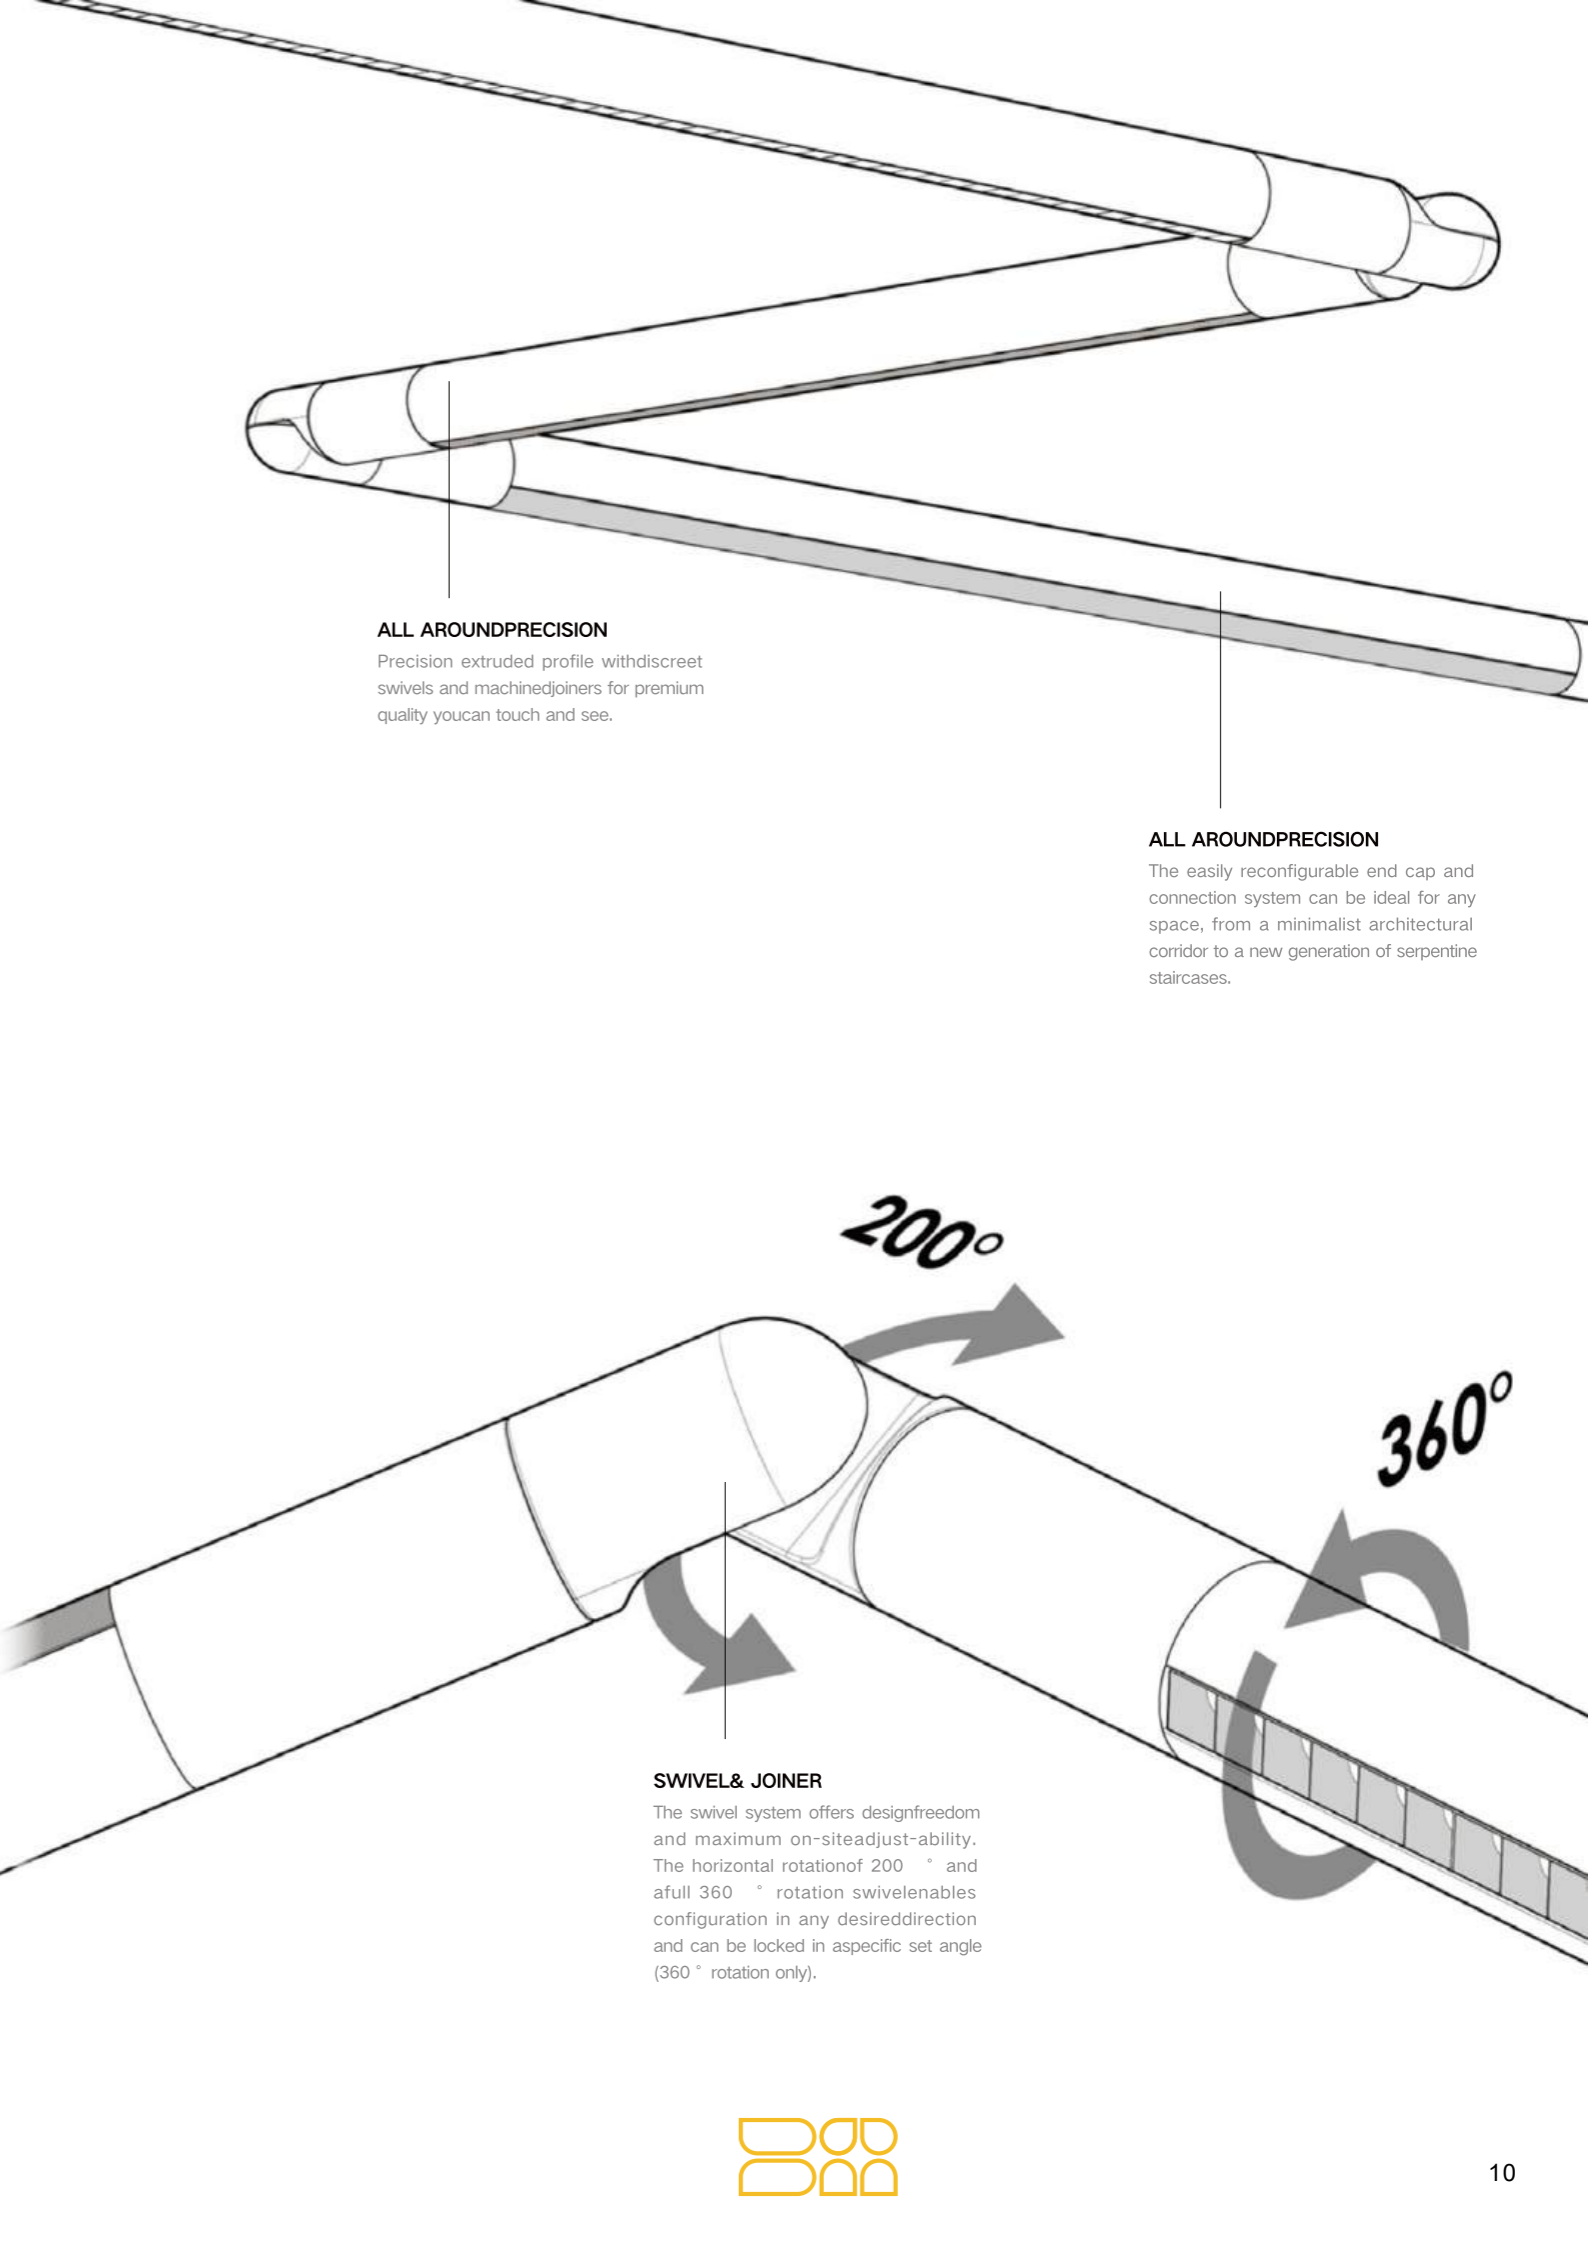

ALL AROUND PRECISION

Precision extruded profile with discreet swivels and machined joiners for premium quality you can touch and see.

ALL AROUND PRECISION

The easily reconfigurable end cap and connection system can be ideal for any space, from a minimalist architectural corridor to a new generation of serpentine staircases.

SWIVEL & JOINER

The swivel system offers design freedom and maximum on-site adjustability. The horizontal rotation of 200° and a full 360° rotation swivel enables configuration in any desired direction and can be locked in a specific set angle (360° rotation only).









Activate the myriad forms of light and reshape
your spatial imagination.
From minimalist lines to brilliant stars, more
stunning light and shadow,



Infinite transformations, the following are the
shapes and patterns we explored, and more rich
shapes are waiting for you to create.



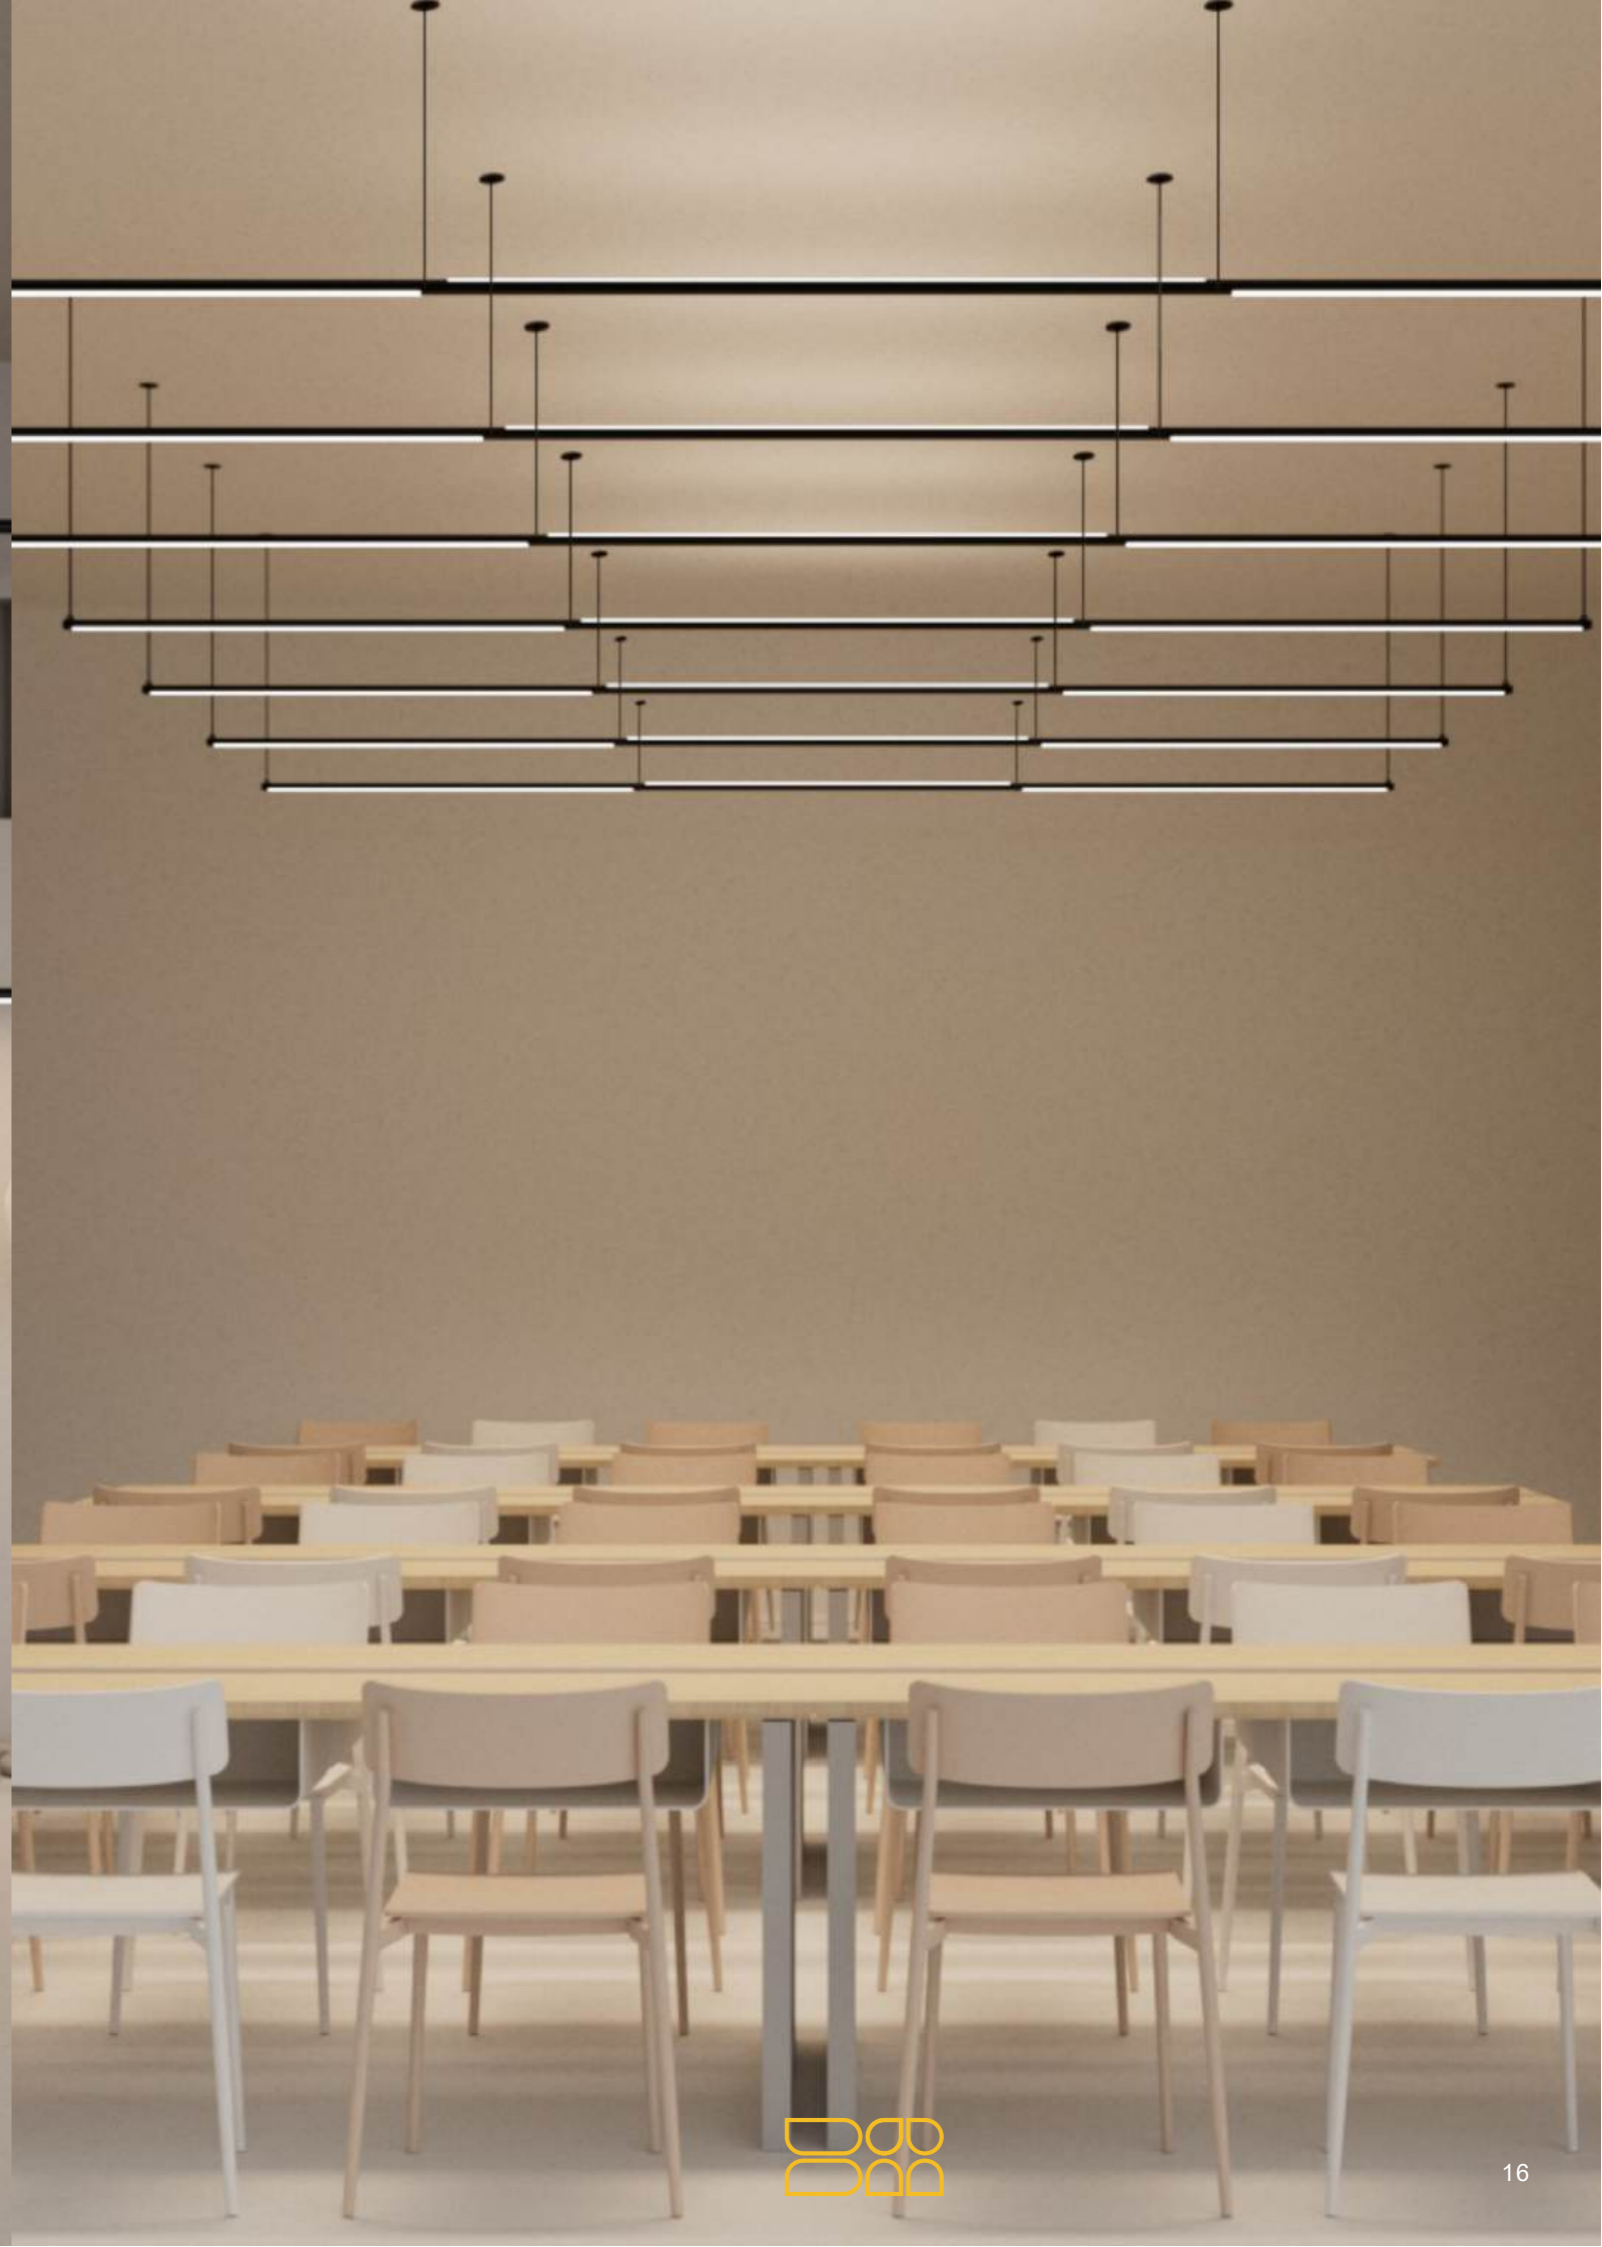

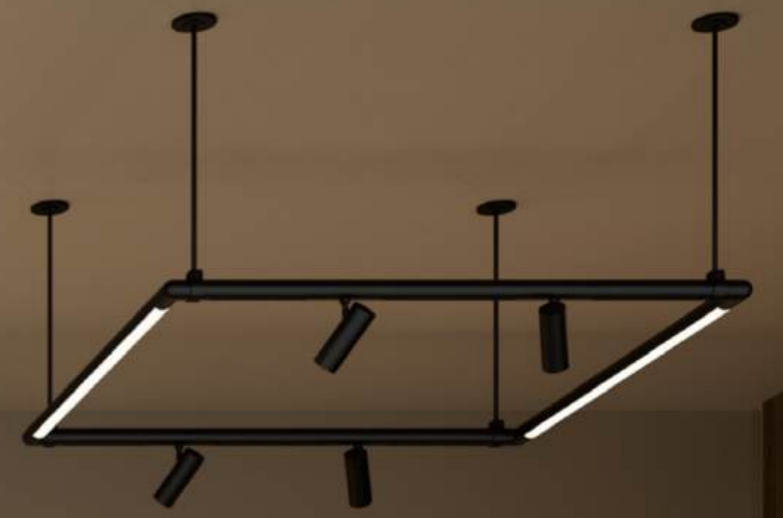







LINEAR GRILLE LIGHTS



LINEAR FLOODLIGHT




FOLDING GRILLE LIGHTS



FOLDING FLOODLIGHT

SIZE(MM)

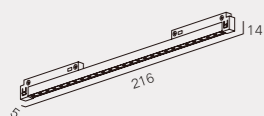

Power

6W


Beam angle

60 °

CCT

3000K/4000K/6000K

SIZE(MM)

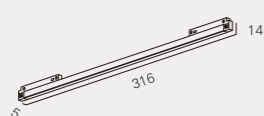

Power

9W


Beam angle

120 °

CCT

3000K/4000K/6000K

SIZE(MM)



Power

18W


Beam angle

120 °

CCT

3000K/4000K/6000K

SIZE(MM)



Power

6W


Beam angle

24 °

CCT

3000K/4000K/6000K

SIZE(MM)



Power

12W


Beam angle

24 °

CCT

3000K/4000K/6000K

SIZE(MM)



Power

6W


Beam angle

120 °

CCT

3000K/4000K/6000K

SIZE(MM)



Power

12W

Beam angle

120 °

CCT

3000K/4000K/6000K

Light Color

Black



General specifications

Material	Aluminum
Diffuser	Lens
IP	IP20
Temperature	-25 ° C-50 ° C
Warranty	5 YEARS
Voltage	24V

Light Color

Black



General specifications

Material	Aluminum
Diffuser	Lens
IP	IP20
Temperature	-25 ° C-50 ° C
Warranty	5 YEARS
Voltage	24V





TRACK LIGHTS



TRACK BALL LAMP



DOUBLE LAYERED GLASS BALL




TRACK TYPE -MOON



TRACK TYPE -EARTH

SIZE(MM)



Power

3W

Beam angle

24 °


CCT

3000K/4000K/6000K

Diffuser

Lens

SIZE(MM)



Power

6W

Beam angle

24 °

CCT

3000K/4000K/6000K

Diffuser

Lens

SIZE(MM)



Power

12W

Beam angle

24 °


CCT

3000K/4000K/6000K

Diffuser

Lens

SIZE(MM)



Power

6W

Beam angle

180 °


CCT

3000K/4000K/6000K

Diffuser

Glass

SIZE(MM)



Power

6W

Beam angle

150 °


CCT

3000K/4000K/6000K

Diffuser

Glass

SIZE(MM)



Power

6W

Beam angle

350 °

CCT

3000K/4000K/6000K

Diffuser

Plastic

Light Color

Black ██████████

General specifications

Material	Aluminum
IP	IP20
Temperature	-25 ° C~50 ° C
Warranty	5 YEARS
Voltage	24V

Light Color

Black ██████████

General specifications

Material	Aluminum
IP	IP20
Temperature	-25 ° C~50 ° C
Warranty	5 YEARS
Voltage	24V






SURFACE MOUNTED SPOTLIGHTS



SOLAR ECLIPSE WALL LAMP




SURFACE MOUNTED FLOODLIGHT

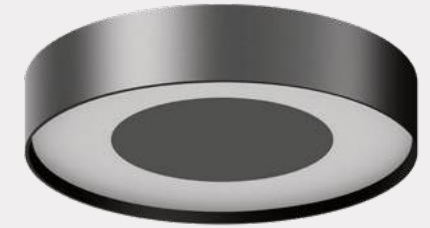


SURFACE MOUNTED SPOTLIGHTS 9 IN 1

SIZE(MM)



SIZE(MM)

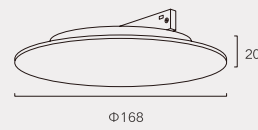

Power

6W

Beam angle

24 °

CCT

3000K/4000K/6000K

Diffuser

Lens

Power

9W

Beam angle

150 °


CCT

3000K/4000K/6000K


Diffuser

PC


SIZE(MM)



SIZE(MM)

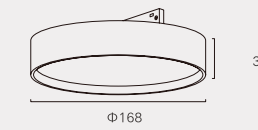

SIZE(MM)



Power

9W

Beam angle

120 °

CCT

3000K/4000K/6000K

Diffuser

Lens

Power

18W

Beam angle

120 °

CCT

3000K/4000K/6000K

Diffuser

Lens

Power

9W

Beam angle

24 °

CCT

3000K/4000K/6000K

Diffuser

Lens

Light Color

Black



General specifications

Material	Aluminum
Diffuser	Lens
IP	IP20
Temperature	-25 ° C~50 ° C
Warranty	5 YEARS
Voltage	24V

Light Color

Black



General specifications

Material	Aluminum
IP	IP20
Temperature	-25 ° C~50 ° C
Warranty	5 YEARS
Voltage	24V





HOISTING-STRAIGHT CYLINDER



SUSPENDED SPHERICAL LAMP



SURFACE MOUNTED SPOTLIGHTS




SURFACE MOUNTED SPOTLIGHTS



TRACK TYPE READING LIGHT

SIZE(MM)

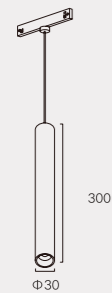

Power

6W

Beam angle

24 °


CCT

3000K/4000K/6000K

Diffuser

Lens

SIZE(MM)

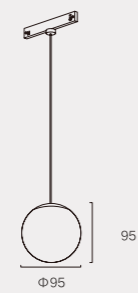

Power

6W

Beam angle

180 °

CCT

3000K/4000K/6000K

Diffuser

PC


Light Color

Black

General specifications

Material	Aluminum
IP	IP20
Temperature	-25 ° C~50 ° C
Warranty	5 YEARS
Voltage	24V

SIZE(MM)

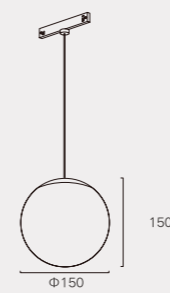

Power

6W

Beam angle

350 °

CCT

3000K/4000K/6000K

Diffuser

Plastic

SIZE(MM)



Power

3W

Beam angle

24 °

CCT

3000K/4000K/6000K

Diffuser

Lens

Light Color

Black

General specifications

Material	Aluminum
IP	IP20
Temperature	-25 ° C~50 ° C
Warranty	5 YEARS
Voltage	24V




SOFT LINEAR LAMP



STICK - FLOODLIGHT

SIZE(MM)



Power

10W


Beam angle

180 °

CCT

3000K/4000K/6000K

SIZE(MM)



Power

20W


Beam angle

180 °

CCT

3000K/4000K/6000K

SIZE(MM)



Power

30W


Beam angle

180 °

CCT

3000K/4000K/6000K

SIZE(MM)



Power

9W


Beam angle

24 °

CCT

3000K/4000K/6000K

SIZE(MM)



Power

18W


Beam angle

24 °

CCT

3000K/4000K/6000K

SIZE(MM)



Power

27W

Beam angle

24 °

CCT

3000K/4000K/6000K

Light Color

Black



General specifications

Material	Silica gel
Diffuser	Silica gel
IP	IP20
Temperature	-25 ° C-50 ° C
	5 YEARS
Voltage	24V

Light Color

Black



General specifications

Material	Aluminum
Diffuser	Lens
IP	IP20
Temperature	-25 ° C-50 ° C
Warranty	5 YEARS
Voltage	24V








Host
Sub Unit

The Track Bluetooth Speaker has two modes of Host and Sub Unit, which can be switched between the Host and Sub Unit by dip switch on the back cover of the device.

One Host can drive N... Sub Unit

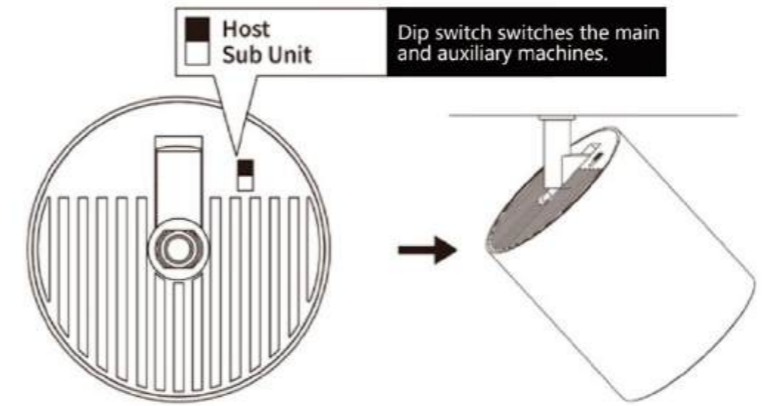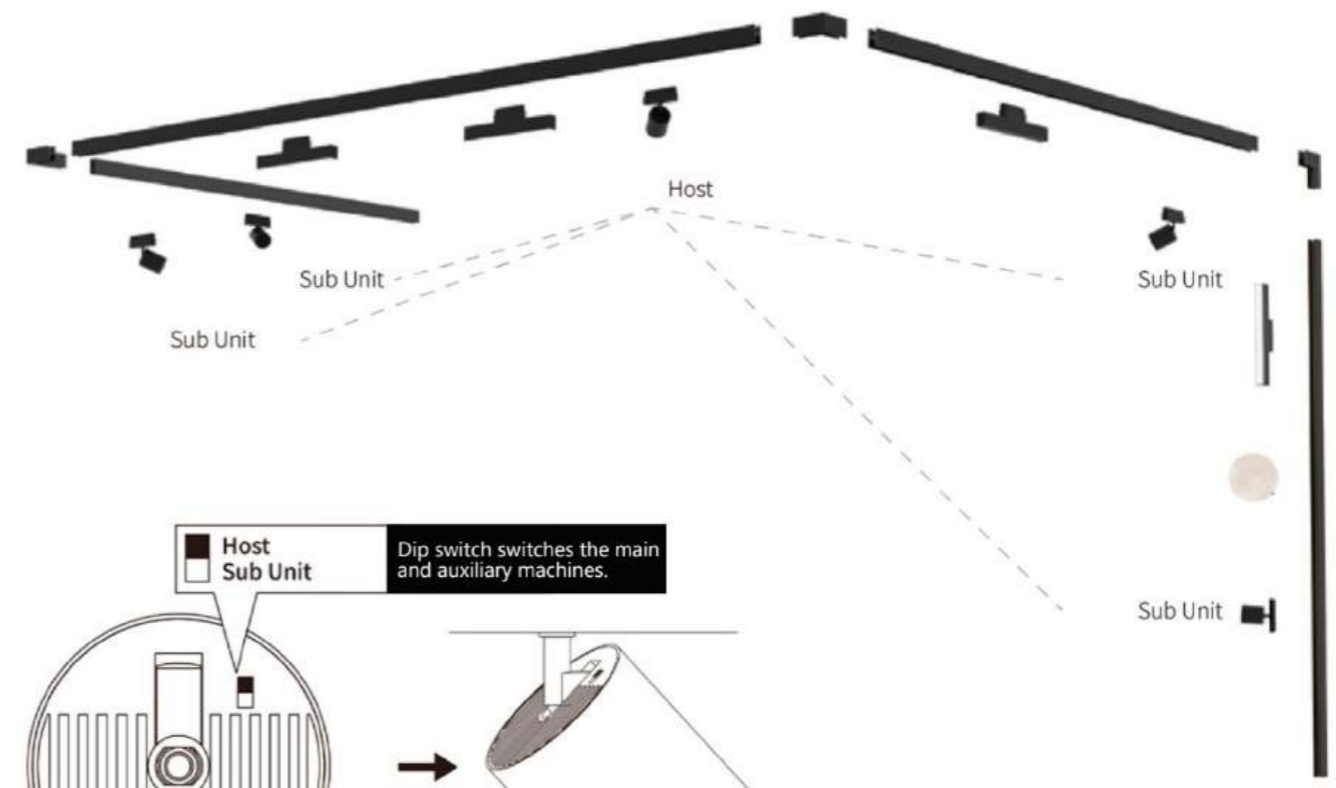

Bluetooth device connect to the Host mode, Track Bluetooth Speaker and other Sub Unit modes automatically synchronize and connect.
One Host can drive N... Sub Unit

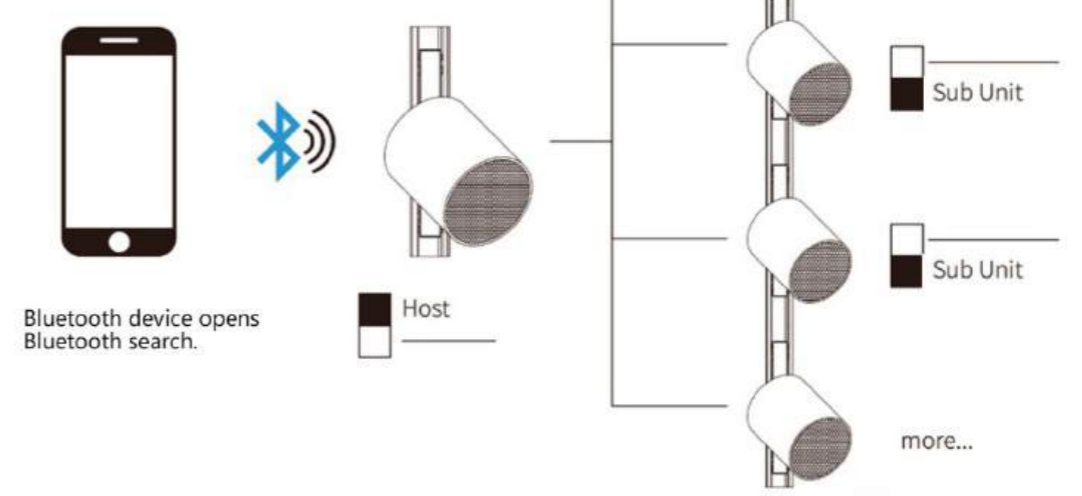




 **Bluetooth® Speaker**



Breathing light

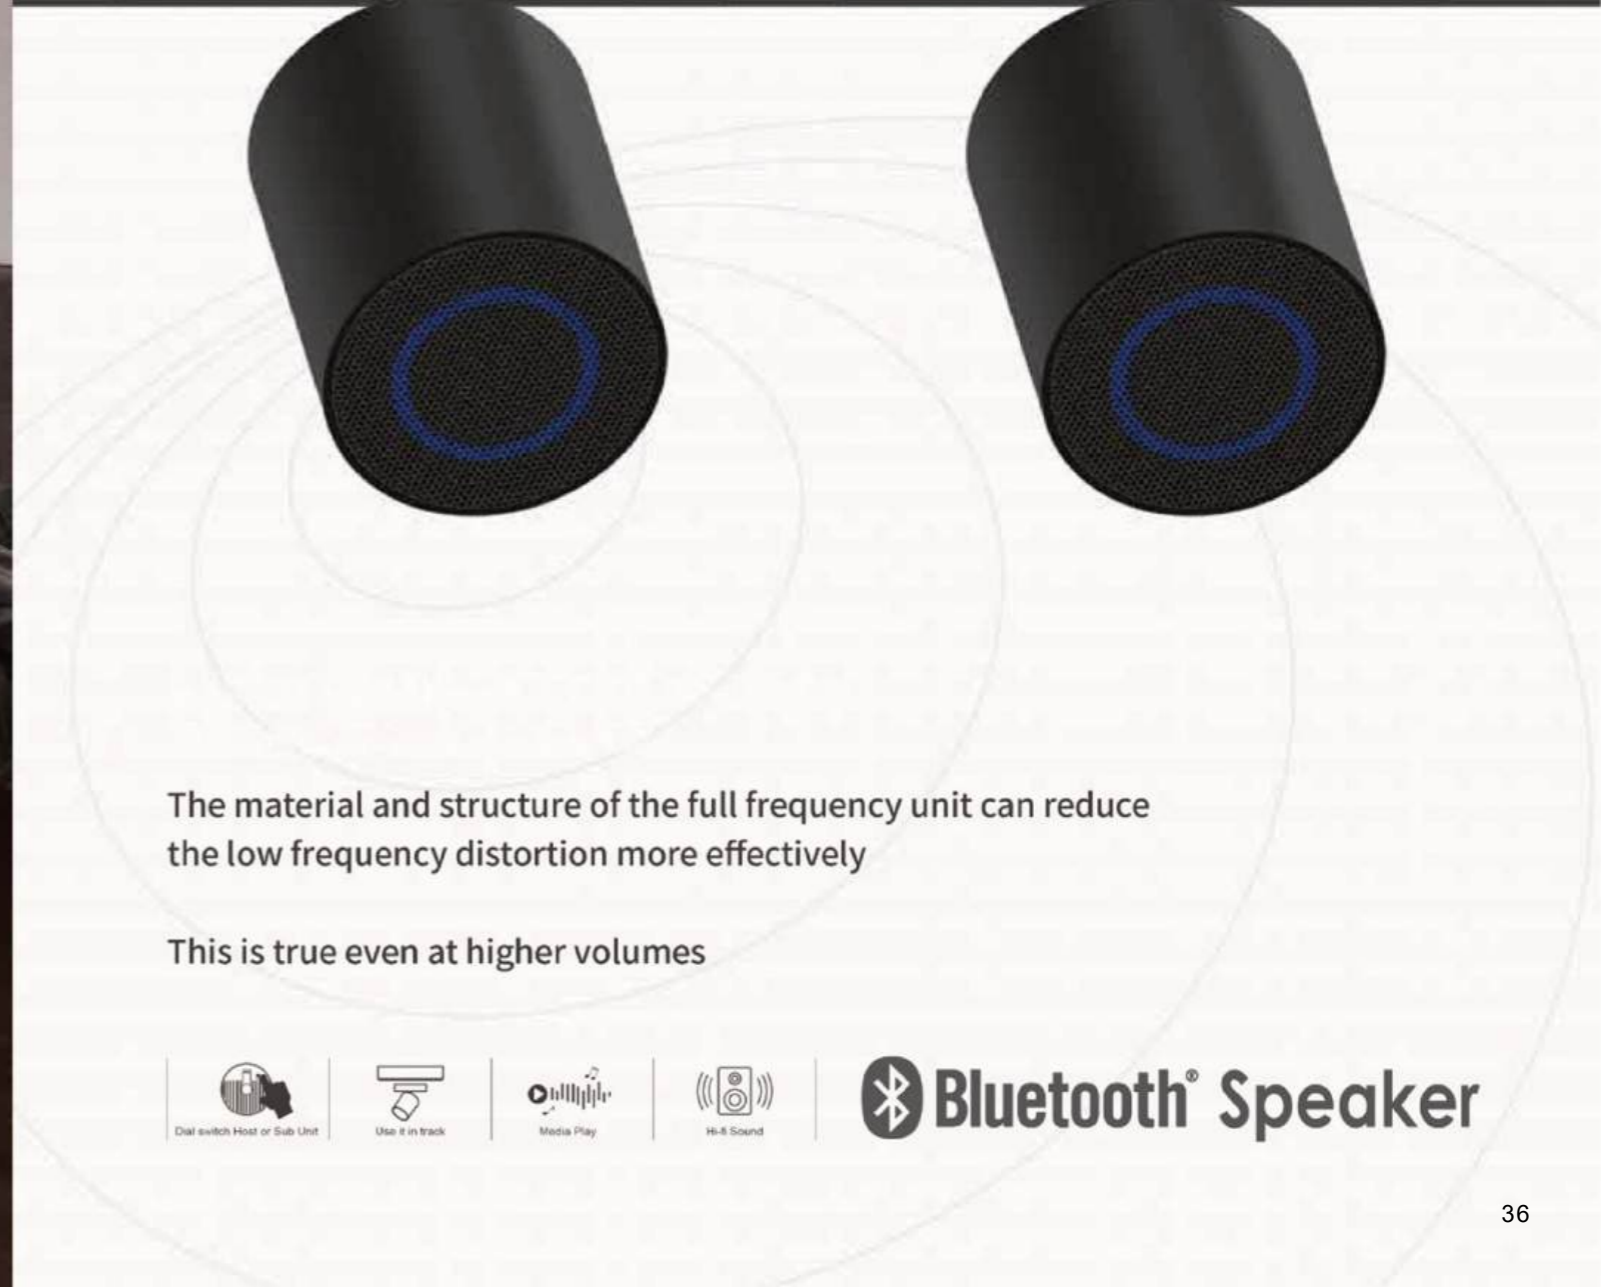

The material and structure of the full frequency unit can reduce the low frequency distortion more effectively

This is true even at higher volumes



 **Bluetooth® Speaker**




BMT
modern lighting

Track Bluetooth speaker



TRACK BLUETOOTH SPEAKER

SIZE(MM)



Power

10W

Voltage

DC24V-48V/AC85V-265V

Bluetooth Version

V5.4

Signal Frequency

12DB

Distance Between Host & Sub Unit

20 meters barrier-free

Material

PC

Protection class

IP20

Ambient temperature

-20 ° C~40C



Ultra-narrow magnetic track system

5mm wide



Ultra-narrow magnetic track system

5mm wide





Hanging-track

Use
Surface mounted or Hanging

Material
Aluminum product

Body Color
Black


Voltage
DC24V

Power
200w (MAX)







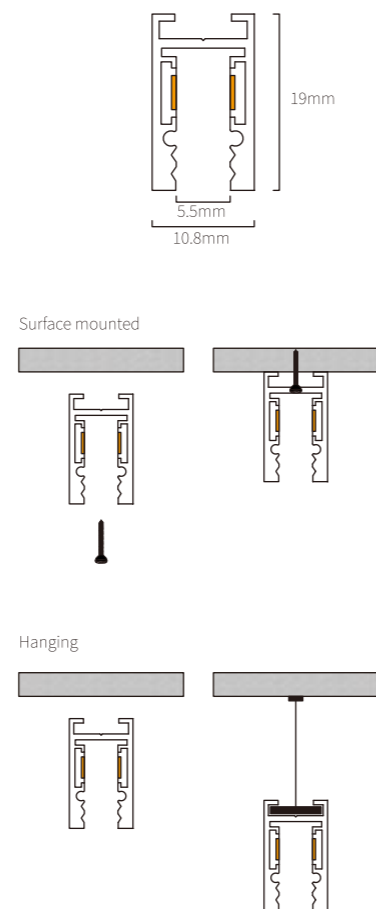

Protection class
IP20

Ambient temperature
-20°C~40°C

Size
1000*10.8*19mm 
2000*10.8*19mm 
3000*10.8*19mm 



Matching parts




Conventional configuration			
Track end plug		Track dust cover	
Track splicing components			
Track connect components			
Track angle module			
Horizontal Angle		Vertical Angle	
Track conducting module			
Bidirectional conductive module		Input module	












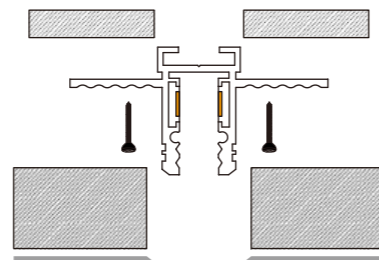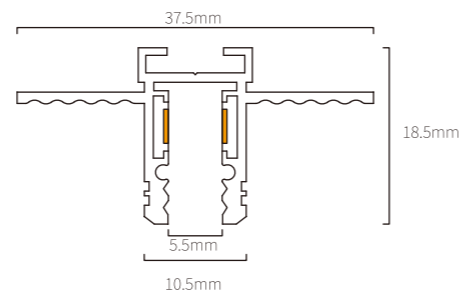


Recessed track

- Use**
Rcessed
- Material**
Aluminum product
- Body Color**
Black
- Voltage**
DC24V
- Power**
200w (MAX)
- Protection class**
IP20
- Ambient temperature**
-20°C~40°C
- Size**

1000*38*19mm	
2000*38*19mm	
3000*38*19mm	



Matching parts




Conventional configuration		
	Track end plug	Track dust cover
Track splicing components		
	Track connect components	
Track angle module		
	Horizontal Angle	Vertical Angle
Track conducting module		
	Bidirectional conductive module	Input module












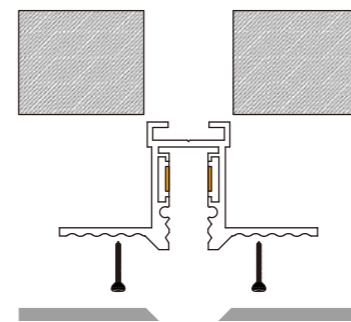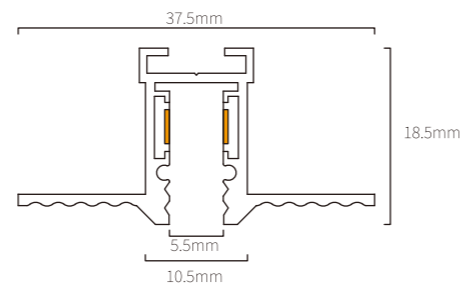


Batch ash track

- Use**
Recessed
- Material**
Aluminum product
- Body Color**
Black
- Voltage**
DC24V
- Power**
200w (MAX)
- Protection class**
IP20
- Ambient temperature**
-20°C~40°C
- Size**

1000*38*19mm	
2000*38*19mm	
3000*38*19mm	



Matching parts

Conventional configuration		
	Track end plug	Track dust cover
Track splicing components		
	Track connect components	
Track angle module		
	Horizontal Angle	Vertical Angle
Track conducting module		
	Bidirectional conductive module	Input module





Circular lifting track

Use

Hanging

Material

Aluminum product

Body Color

Black

Voltage

DC24V

Power

200w (MAX)

Protection class



IP20

Ambient temperature

-20°C~40°C

Size

- 1000*22*18mm 
- 2000*22*18mm 
- 3000*22*18mm 

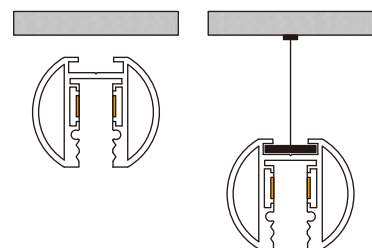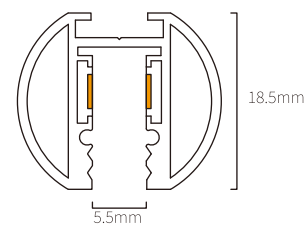


Matching parts

Conventional configuration



Track end plug



Track dust cover



Hanging wire package

Track splicing components



Track connect components

Track angle module



Horizontal Angle

Track conducting module



Bidirectional conductive module



Input module







Double sided lifting track

- Use**
Hanging
- Material**
Aluminum product
- Body Color**
Black
- Voltage**
DC24V
- Power**
200w (MAX)
- Protection class**
IP20
- Ambient temperature**
-20°C~40°C
- Size**

1000*11*33mm	
2000*11*33mm	
3000*11*33mm	

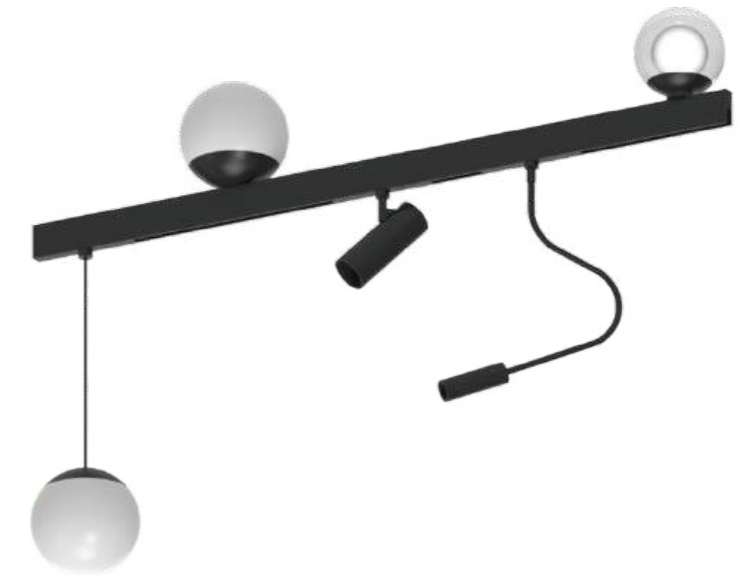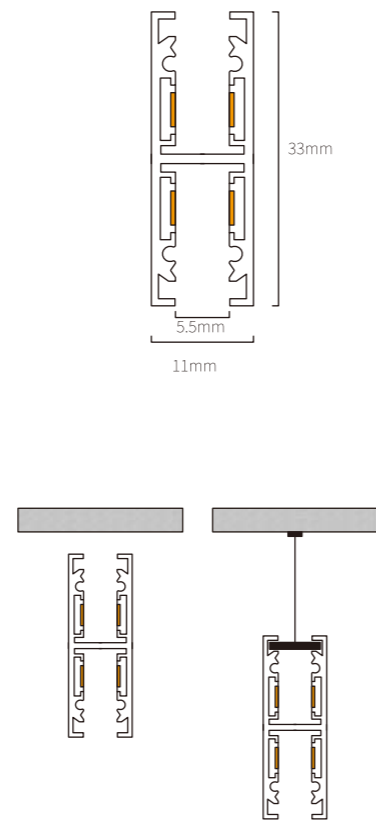

Matching parts

Conventional configuration			
Track splicing components			
Track angle module			
Track conducting module			





Ceiling soft film track

Use
Lifting fixing

Material
Aluminum product

Body Color
Black



Voltage
DC24V

Power
200w (MAX)

Protection class
IP20

Ambient temperature
-20°C~40°C



Size
1000*42*38mm
2000*42*38mm
3000*42*38mm

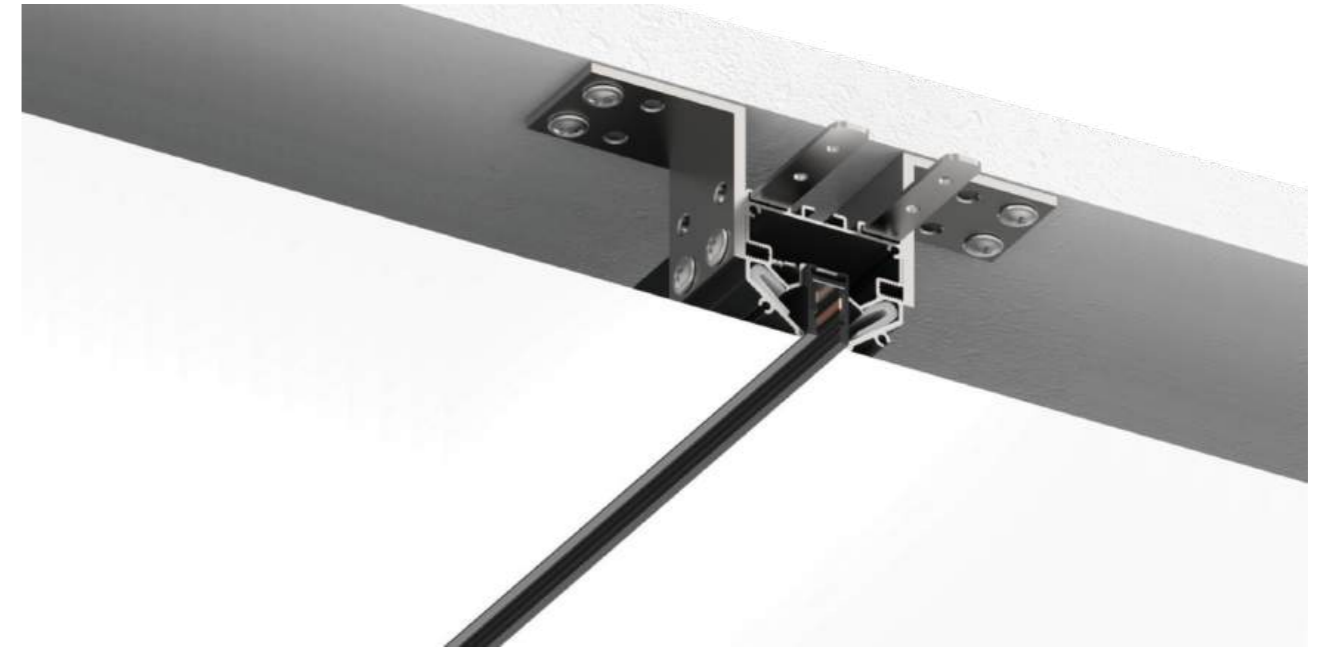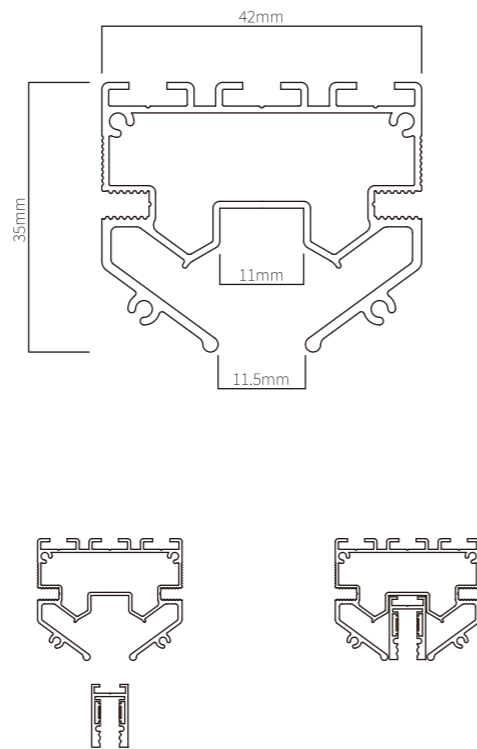

Matching parts

Conventional configuration				
	Track end plug	Mounting part	Silicone strip	Hanging-track
Track splicing components				
	Angle reinforcement	Direct reinforcement		
Track angle module				
	Horizontal Angle			
Track conducting module				
	Bidirectional conductive module	Input module		



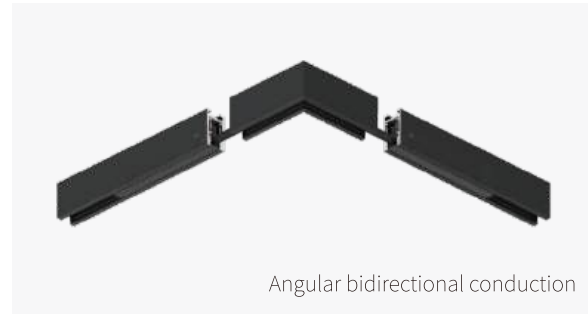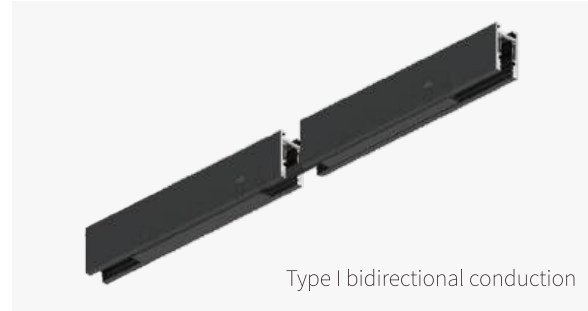

Bidirectional conductive module

Use
Type I or Angle bidirectional conductive module

Material
plastic


Body Color
Black

Voltage
DC24V

Power
200w (MAX)

Protection class
IP20

Ambient temperature
-20°C~40°C

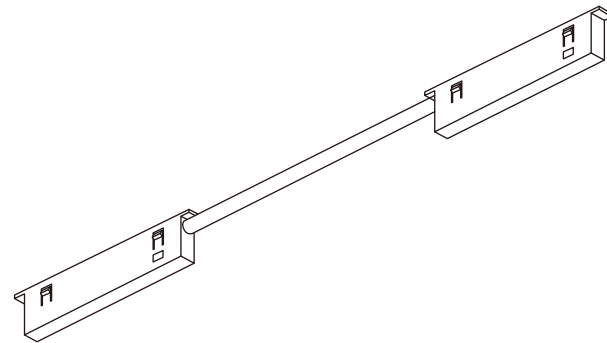

Input module

Use
The end of the line is connected to the external transformer

Material
塑料 | plastic


Body Color
Black

Voltage
DC24V


Power
200w (MAX)

Protection class
IP20

Ambient temperature
-20°C~40°C

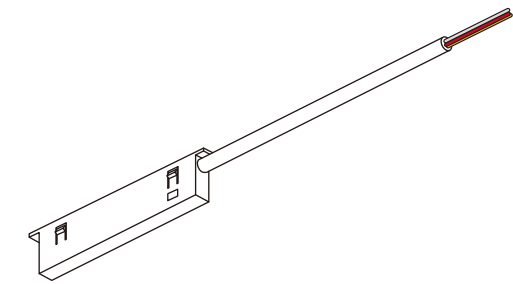


3 CCT

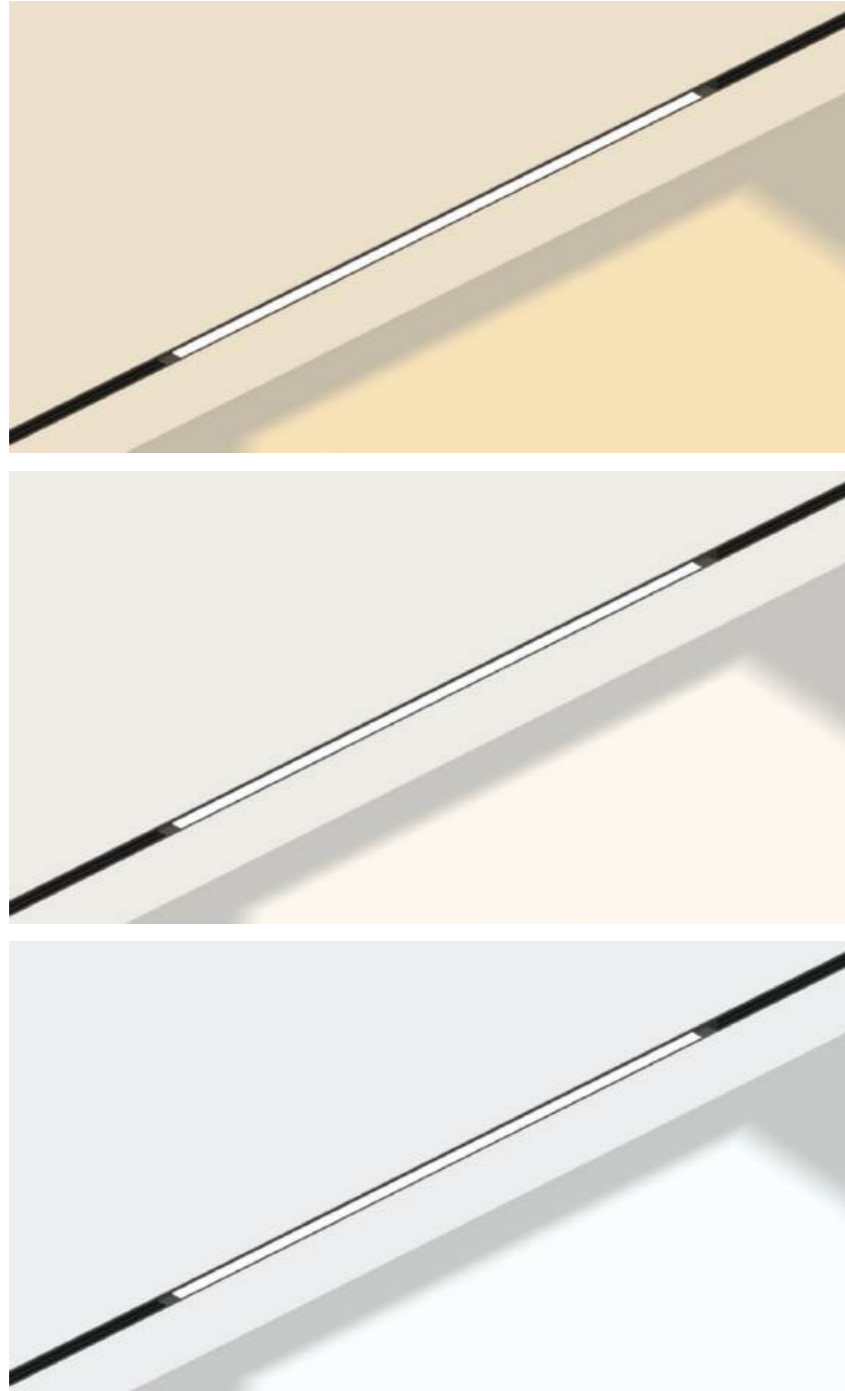



Conventional wiring of monochrome temperature lamps

Monochrome lamps - integrated power supply


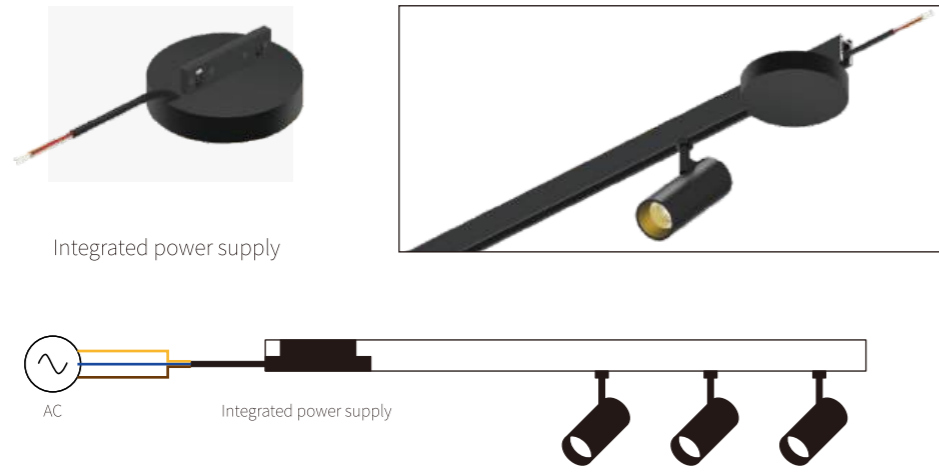


Monochrome temperature luminaires - TRAIC, 0-10V, DALI group control dimming wiring

Monochrome lamps - Connected with external TRAIC

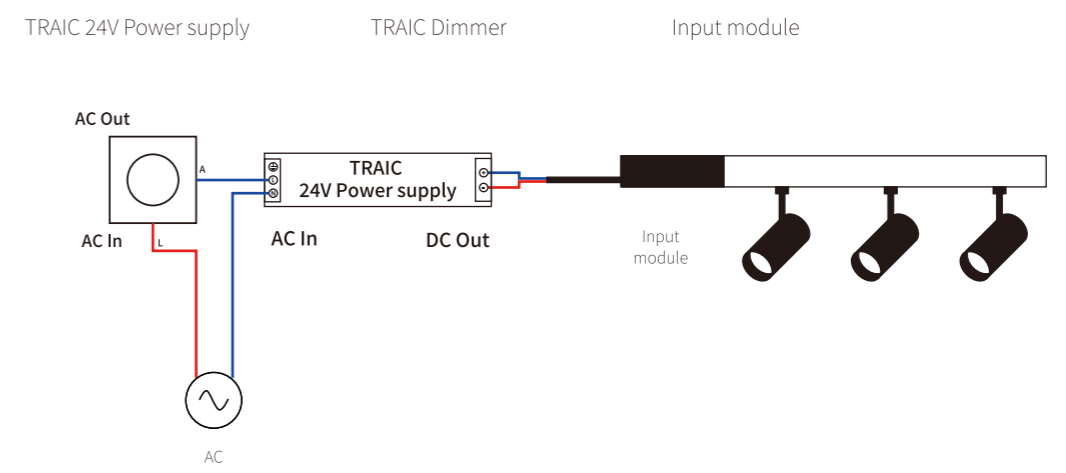
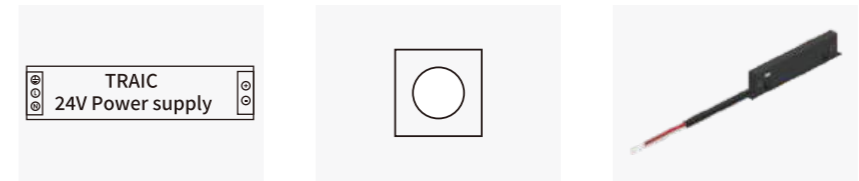


Monochrome lamps - External transformer

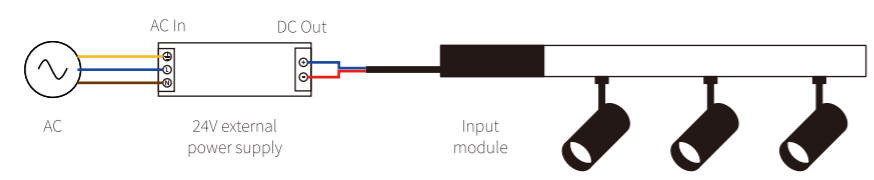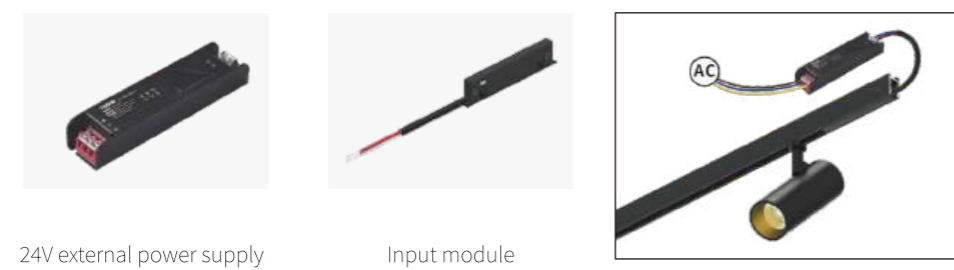



Monochrome lamps - Connected with external 0-10V Dimming

Monochrome lamps - Connected with external DALI Dimming

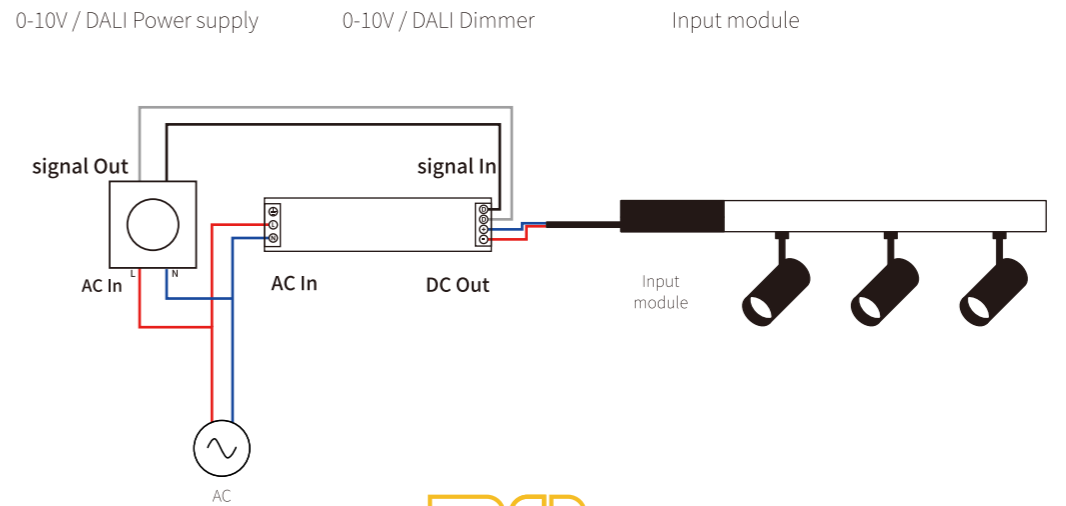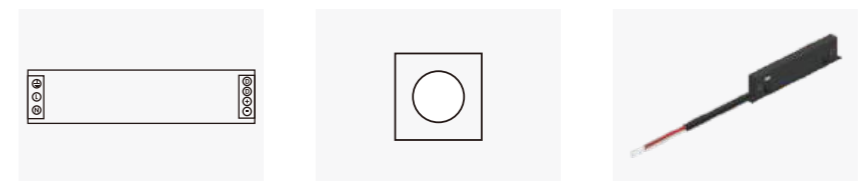



3CCT lamps built-in intelligent power group control dimming color temperature


3CCT luminaire - integrated intelligent power supply

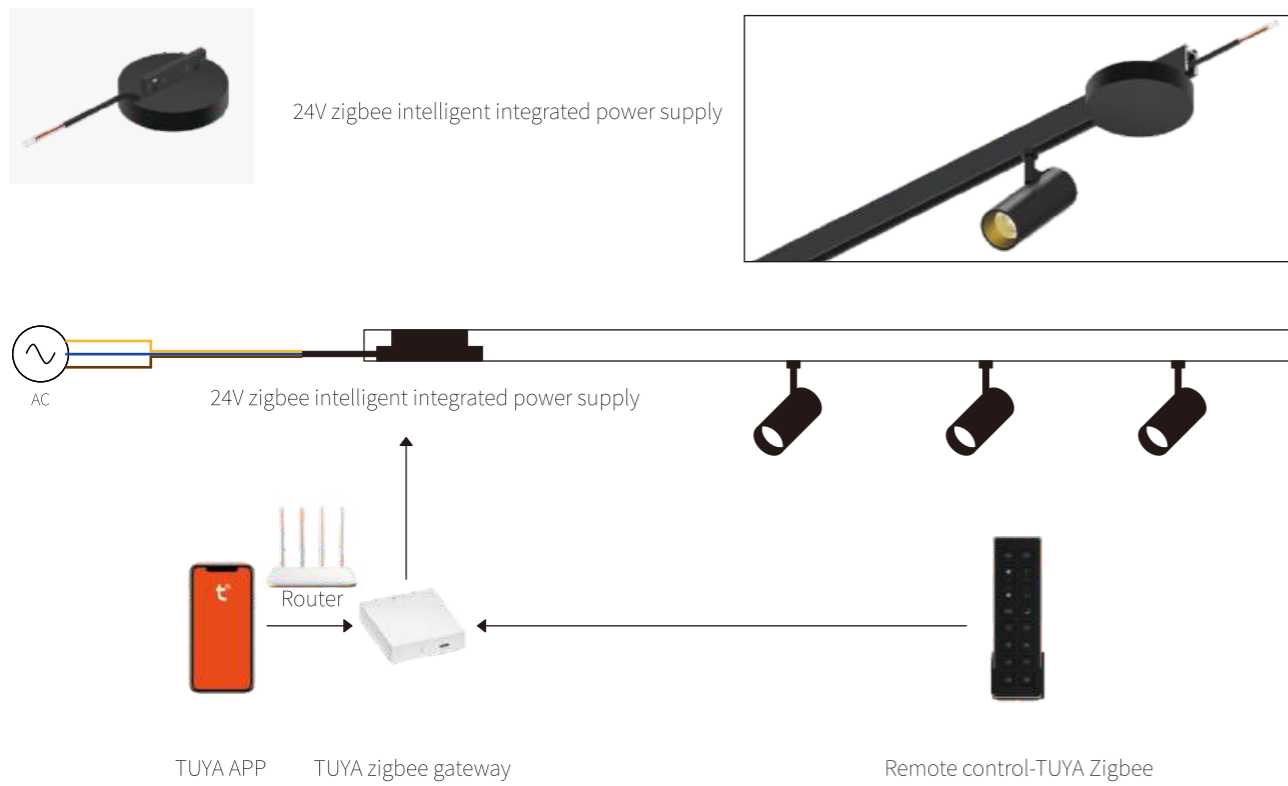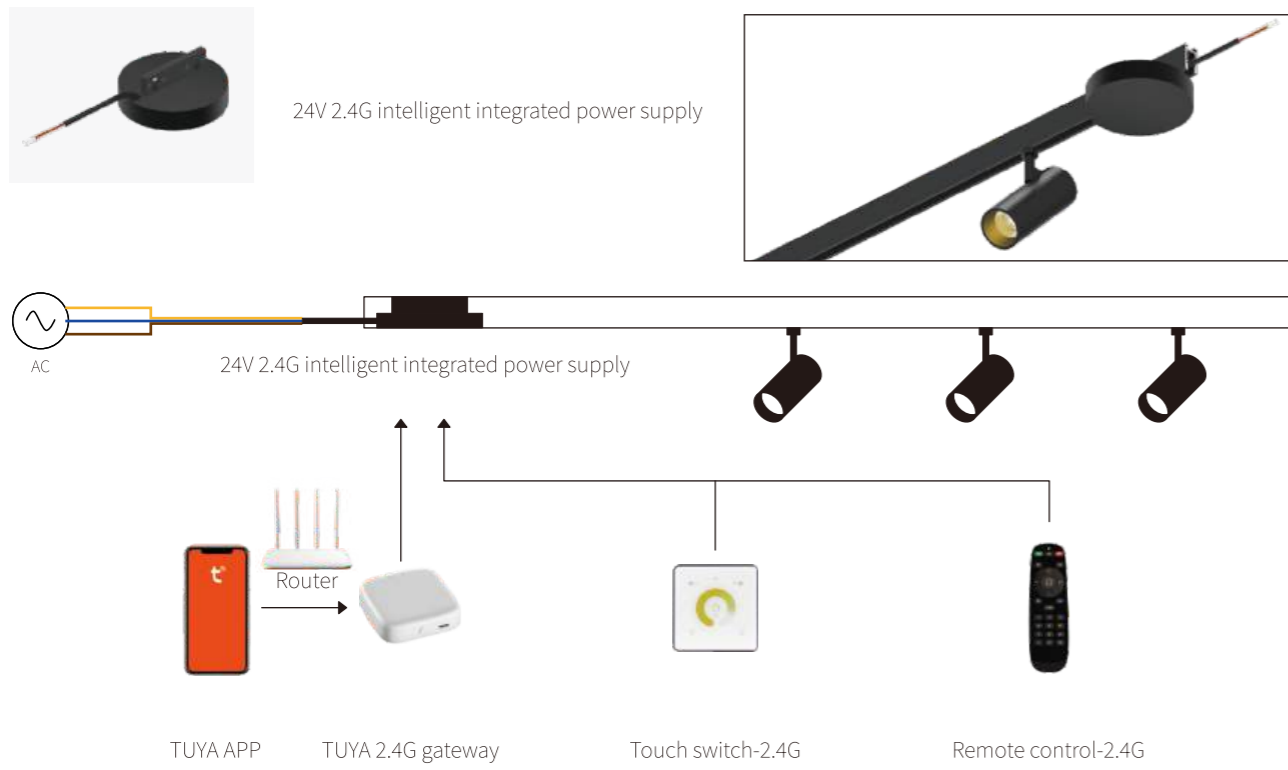

3CCT lamps external intelligent power supply group control dimming color temperature

3CCT luminaire - Connect an external transformer and an external controller

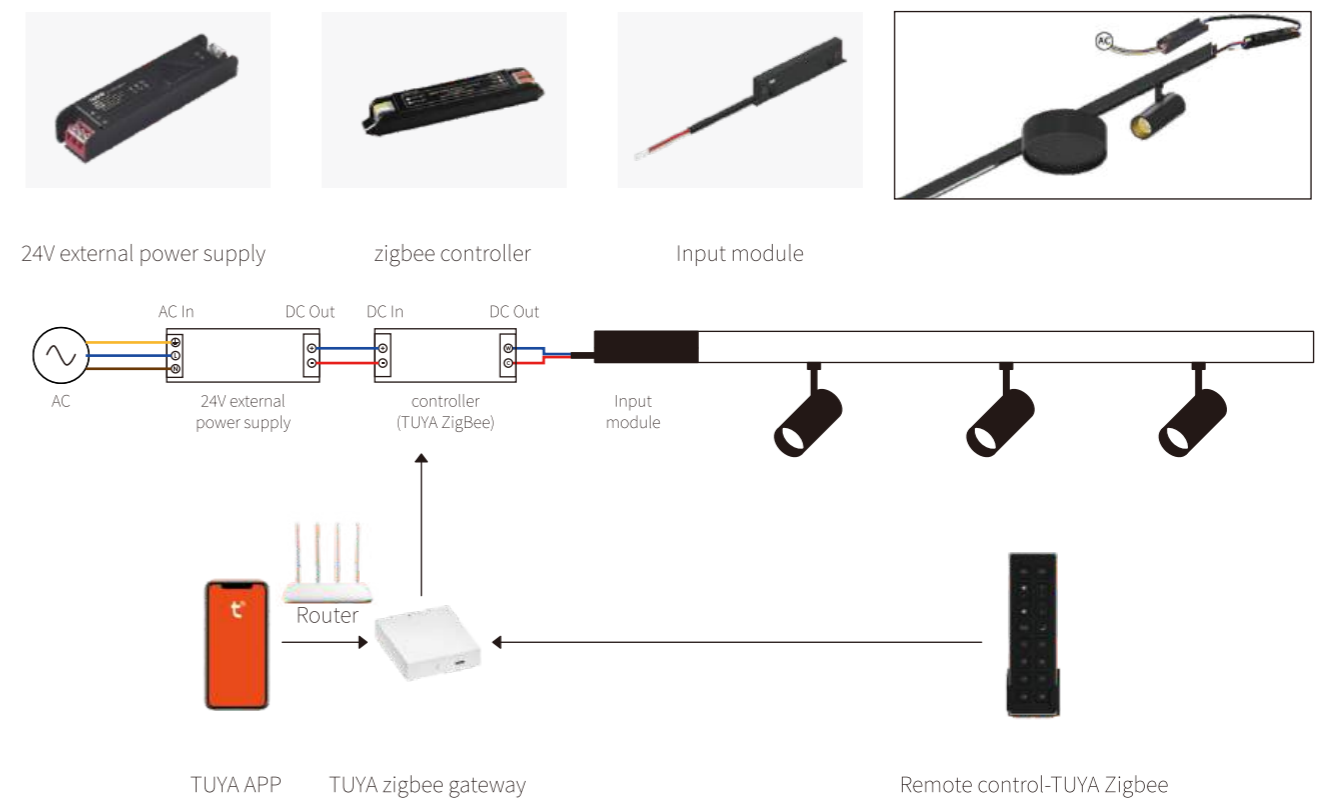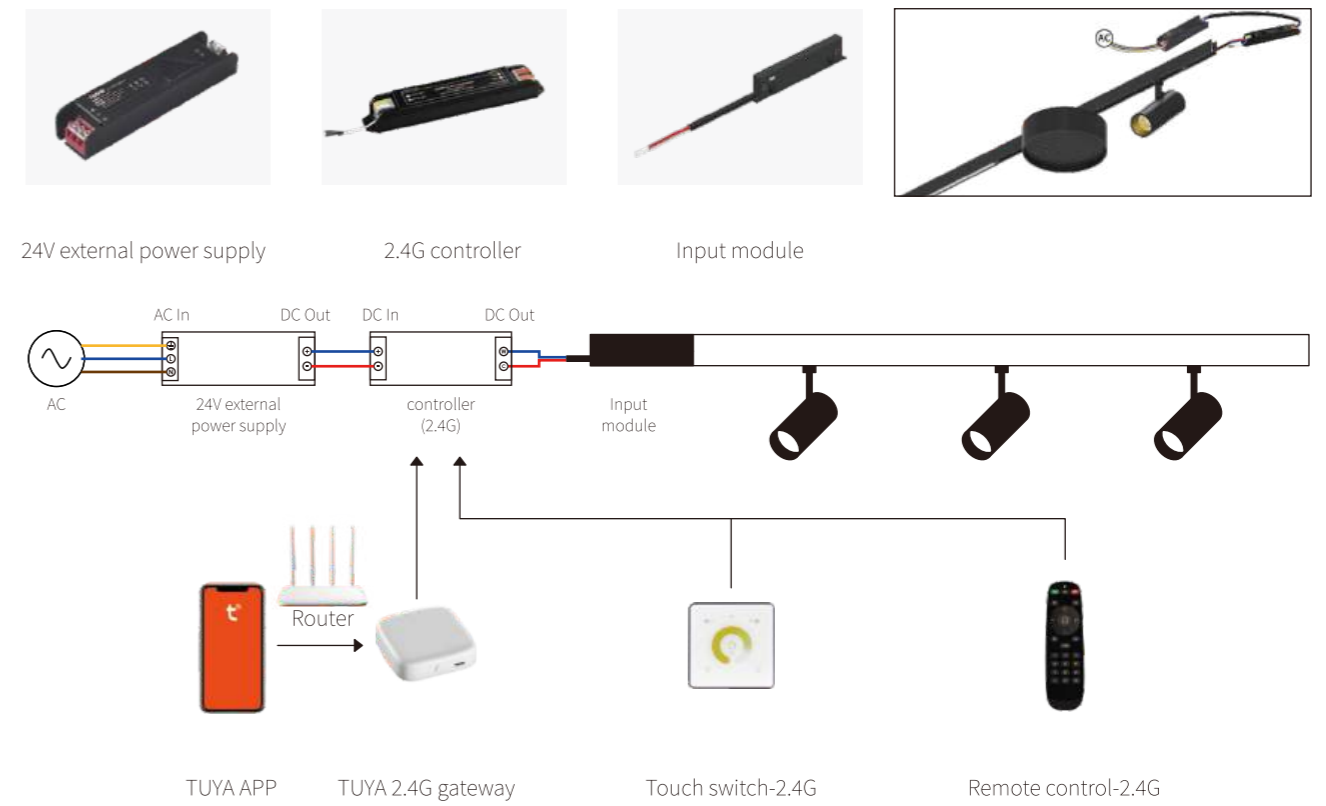


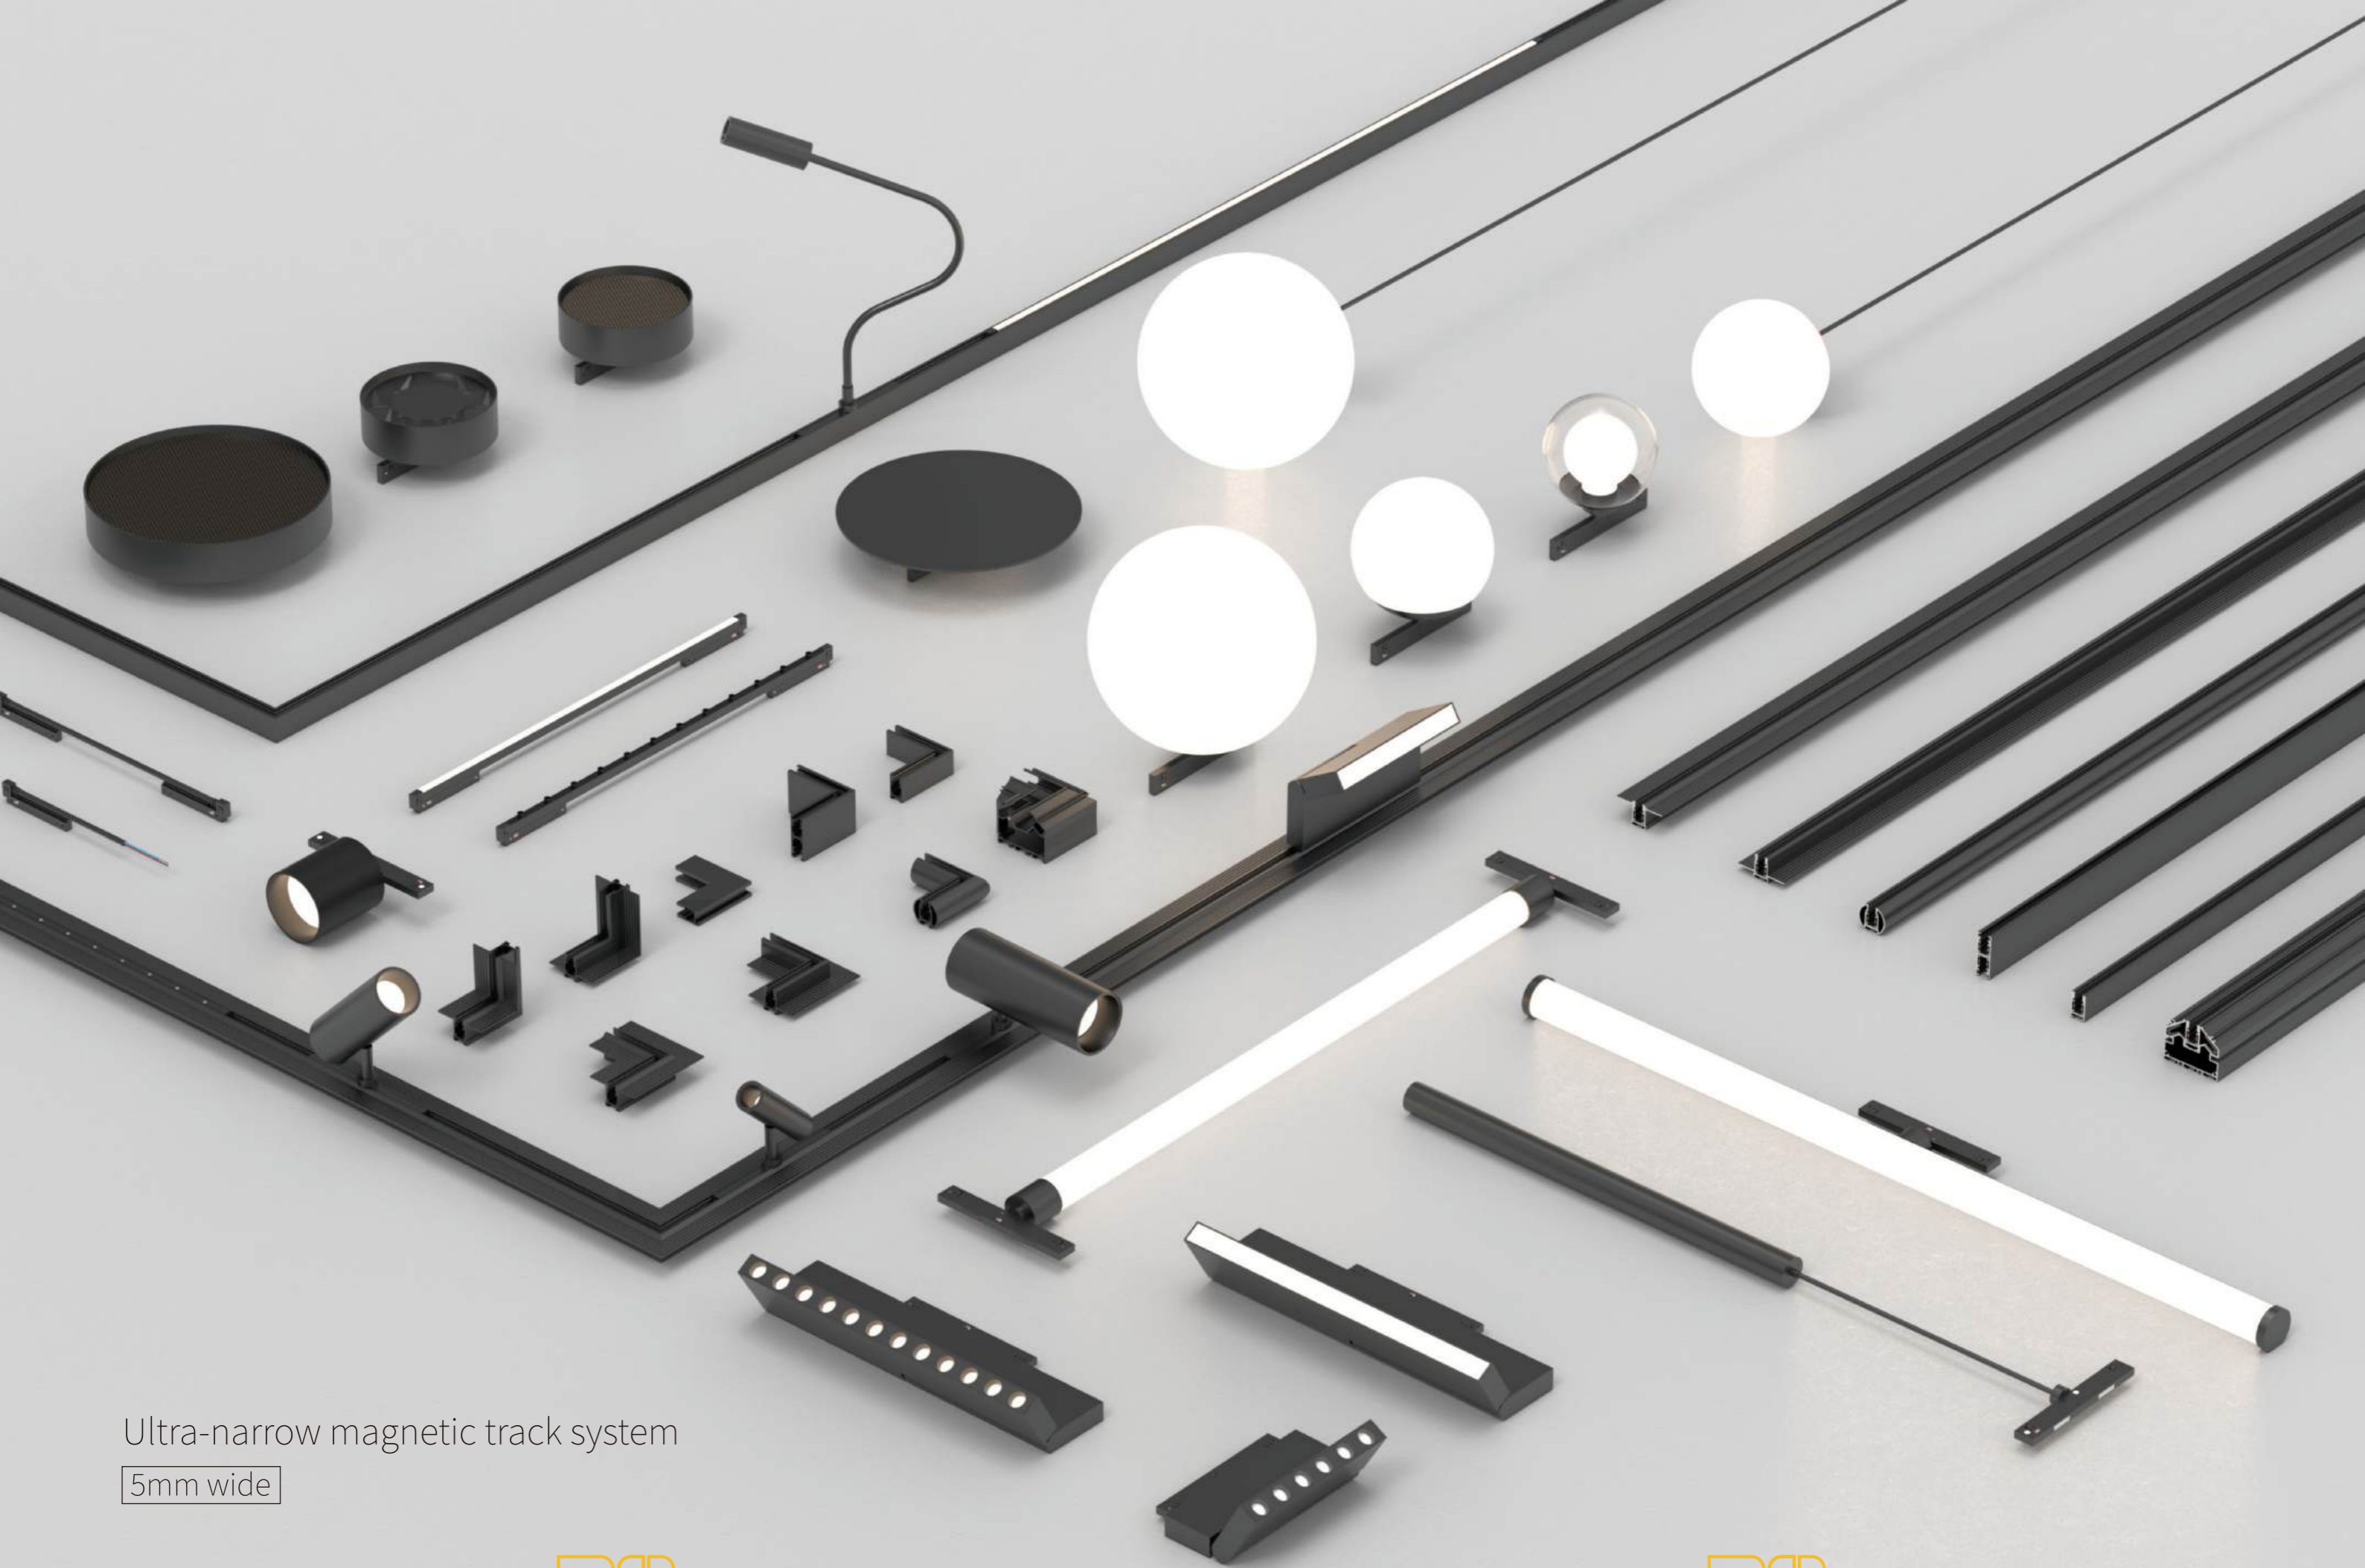

Ultra-narrow magnetic track system


5mm wide



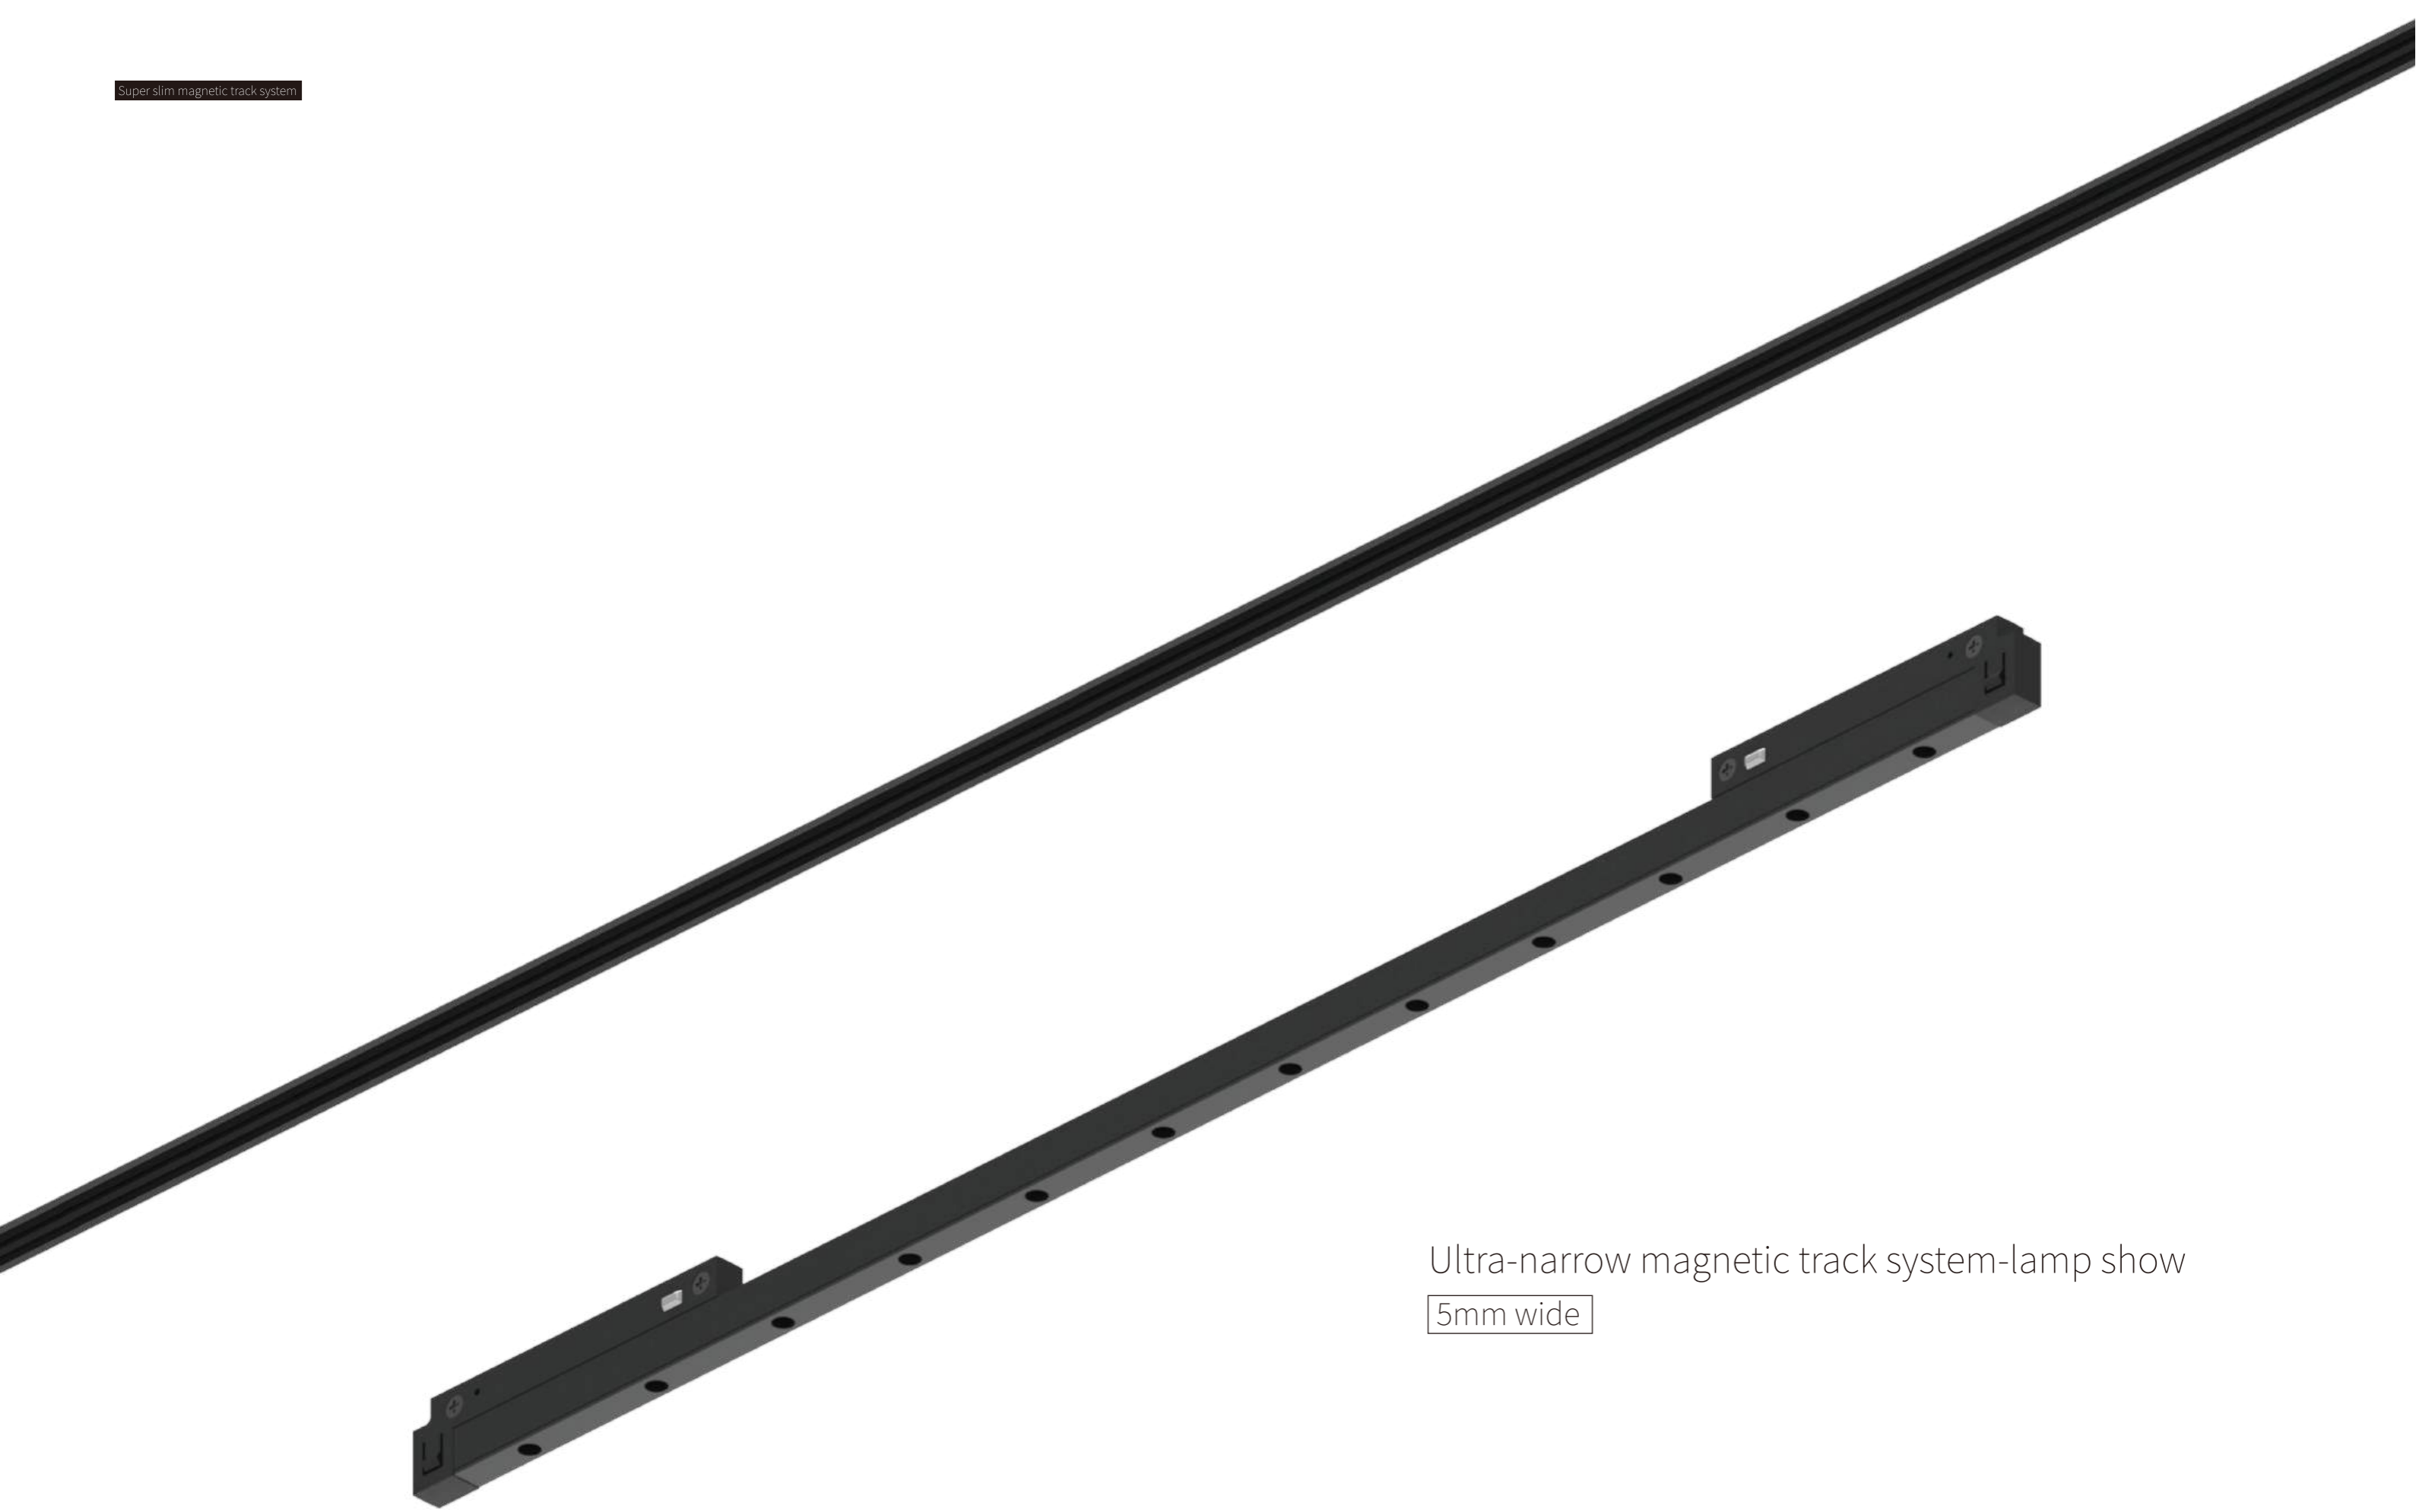

Ultra-narrow magnetic track system-lamp show
5mm wide



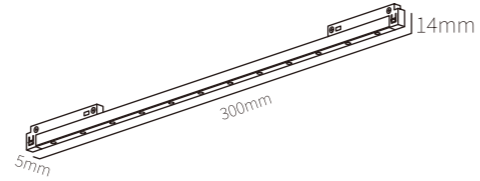

Grille light 12 in 1

size

L300*W5*H14mm

Power

9W

Diffuser

lens

Luminous Angle

24°

Temperature

3000K / 4000K / 6000K

Voltage

DC24V

Material

Aluminum product

Body Color

Black


Protection class

IP20

Ambient temperature

-20°C~40°C



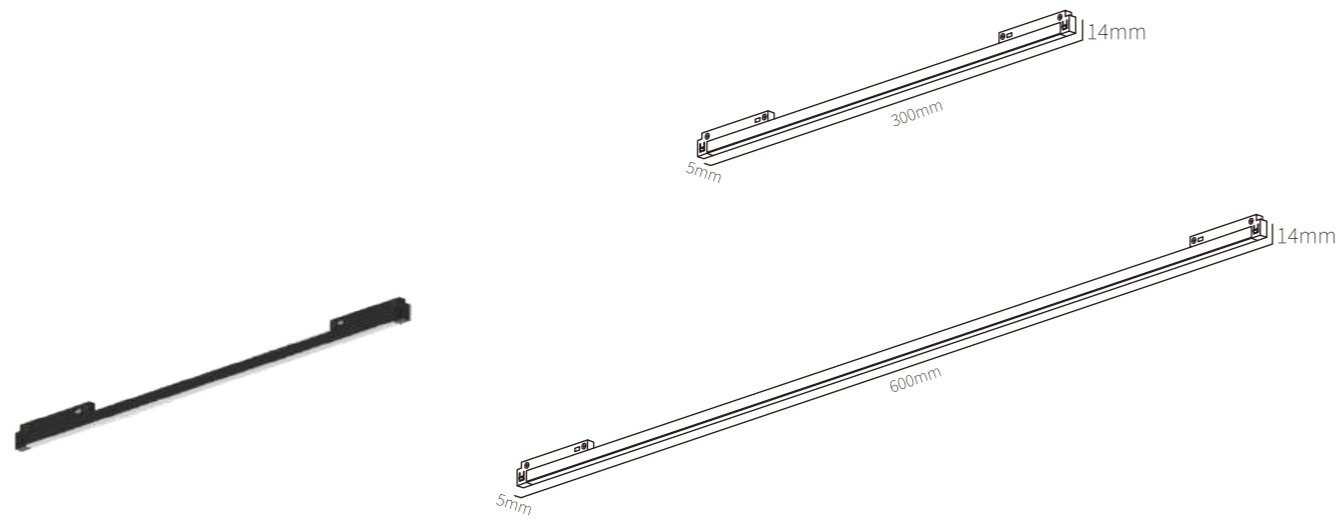

Floodlight light

size

L300*W5*H14mm

Power

9W

Diffuser

PC

Luminous Angle

120°

Temperature

3000K / 4000K / 6000K

Voltage

DC24V

Material

Aluminum product

Body Color

Black

Protection class

IP20

Ambient temperature

-20°C~40°C

size

L600*W5*H14mm

Power


18W





Ultra-narrow magnetic track system-lamp show
5mm wide



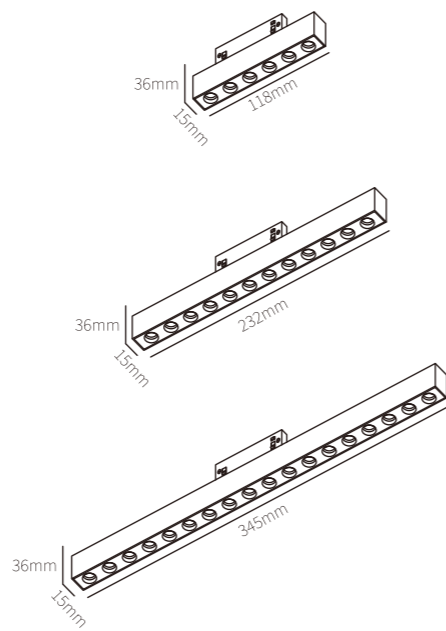

Grille light

size

L118*W15*H36mm

Power

6W

Diffuser

lens

Luminous Angle

24°

Temperature

3000K / 4000K / 6000K

Voltage

DC24V

Material

Aluminum product

Body Color

Black

Protection class

IP20

Ambient temperature

-20°C~40°C

size

L232*W15*H36mm

Power

12W



size

L345*W15*H36mm

Power

18W



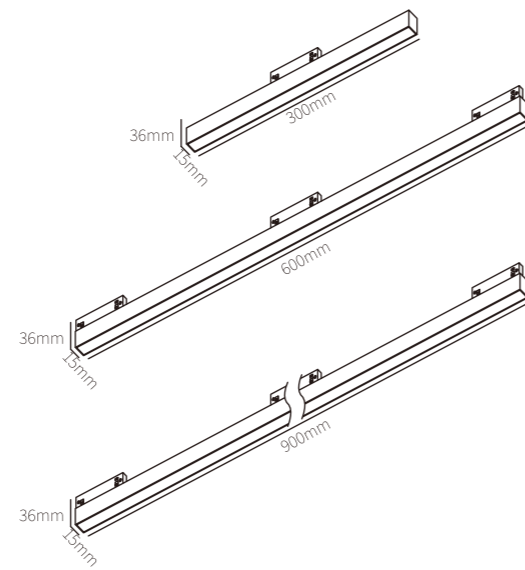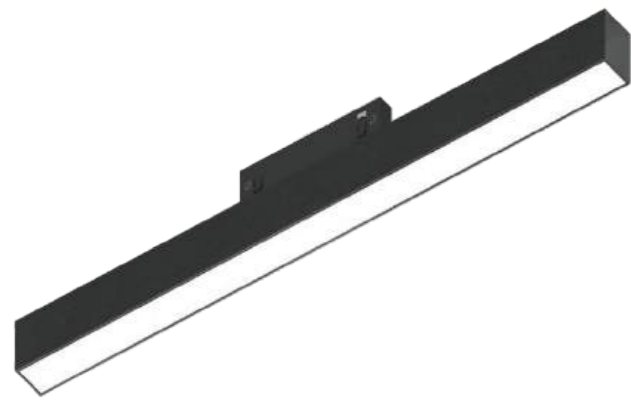

Floodlight light

size

L300*W15*H36mm

Power

9W

Diffuser

PC

Luminous Angle

24°

Temperature

3000K / 4000K / 6000K

Voltage

DC24V

Material

Aluminum product

Body Color

Black

Protection class

IP20

Ambient temperature

-20°C~40°C

size

L600*W15*H36mm

Power

18W

size

L900*W15*H36mm

Power

27W





Folding light

size

L118*W15*H100mm

Power

6W

Diffuser

lens

Luminous Angle

24°

Temperature

3000K / 4000K / 6000K

Voltage

DC24V

Material

Aluminum product

Body Color



Black



Protection class

IP20

Ambient temperature

-20°C~40°C

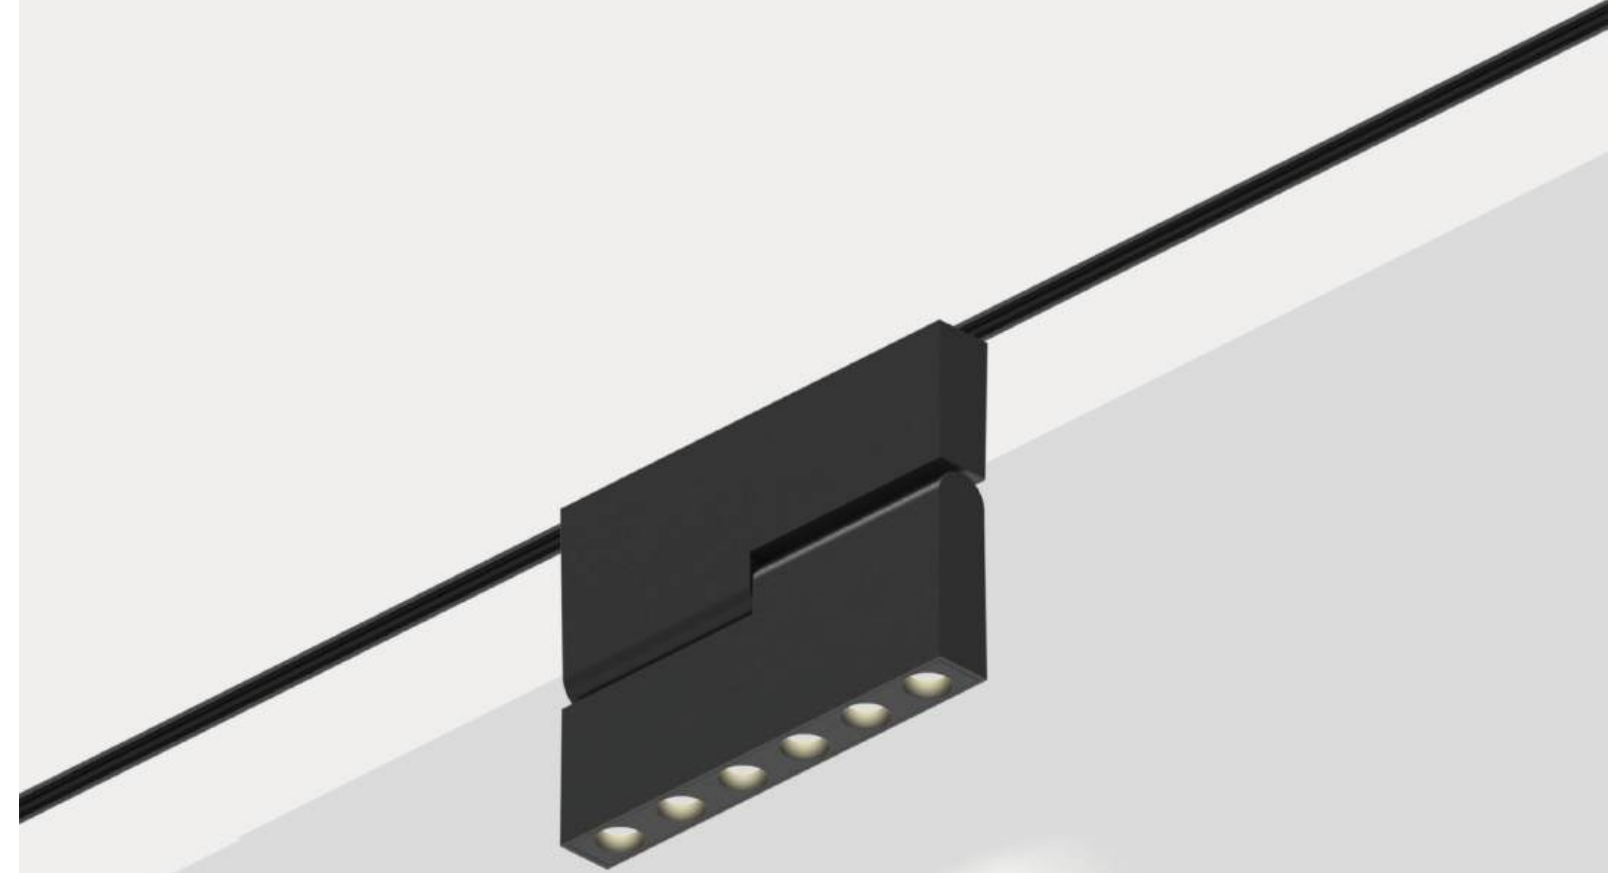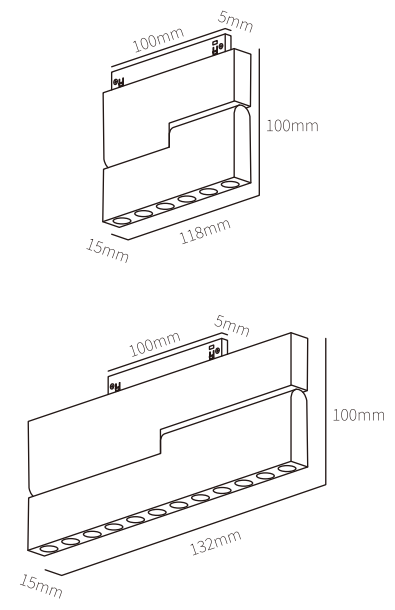

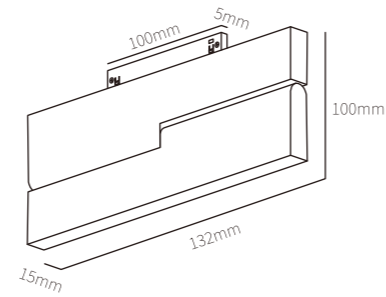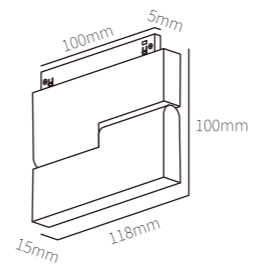

Floodlight Folding light

size
L118*W15*H100mm

Power
6W

Diffuser
PC

Luminous Angle
120°

Temperature
3000K / 4000K / 6000K

Voltage
DC24V

Material
Aluminum product


Body Color
Black


Protection class
IP20

Ambient temperature
-20°C~40°C

size
L232*W15*H100mm


Power
12W

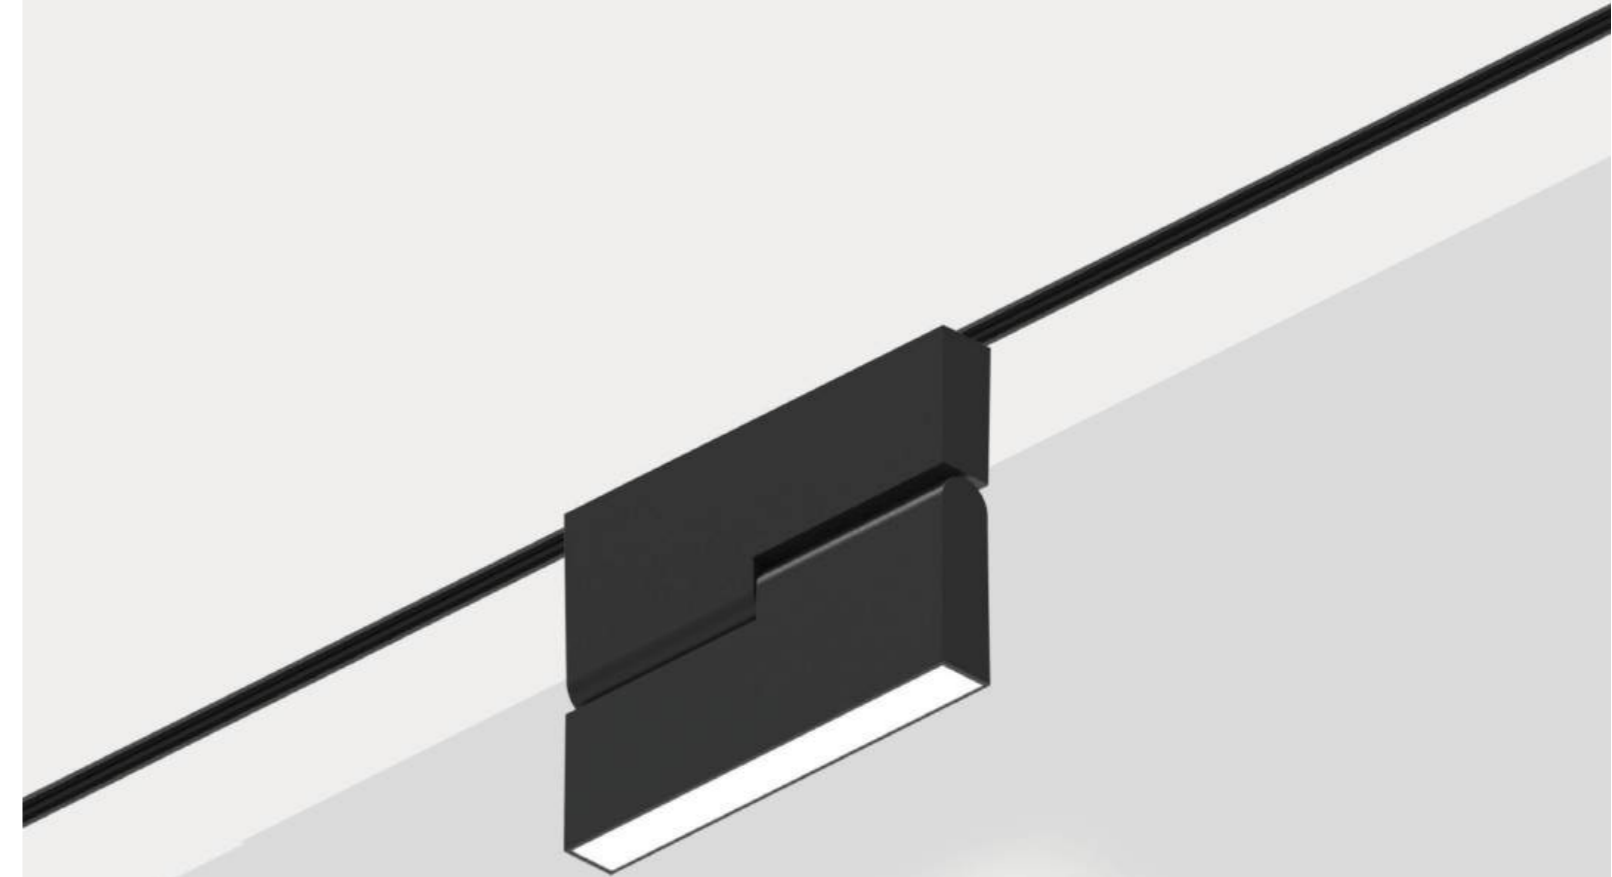

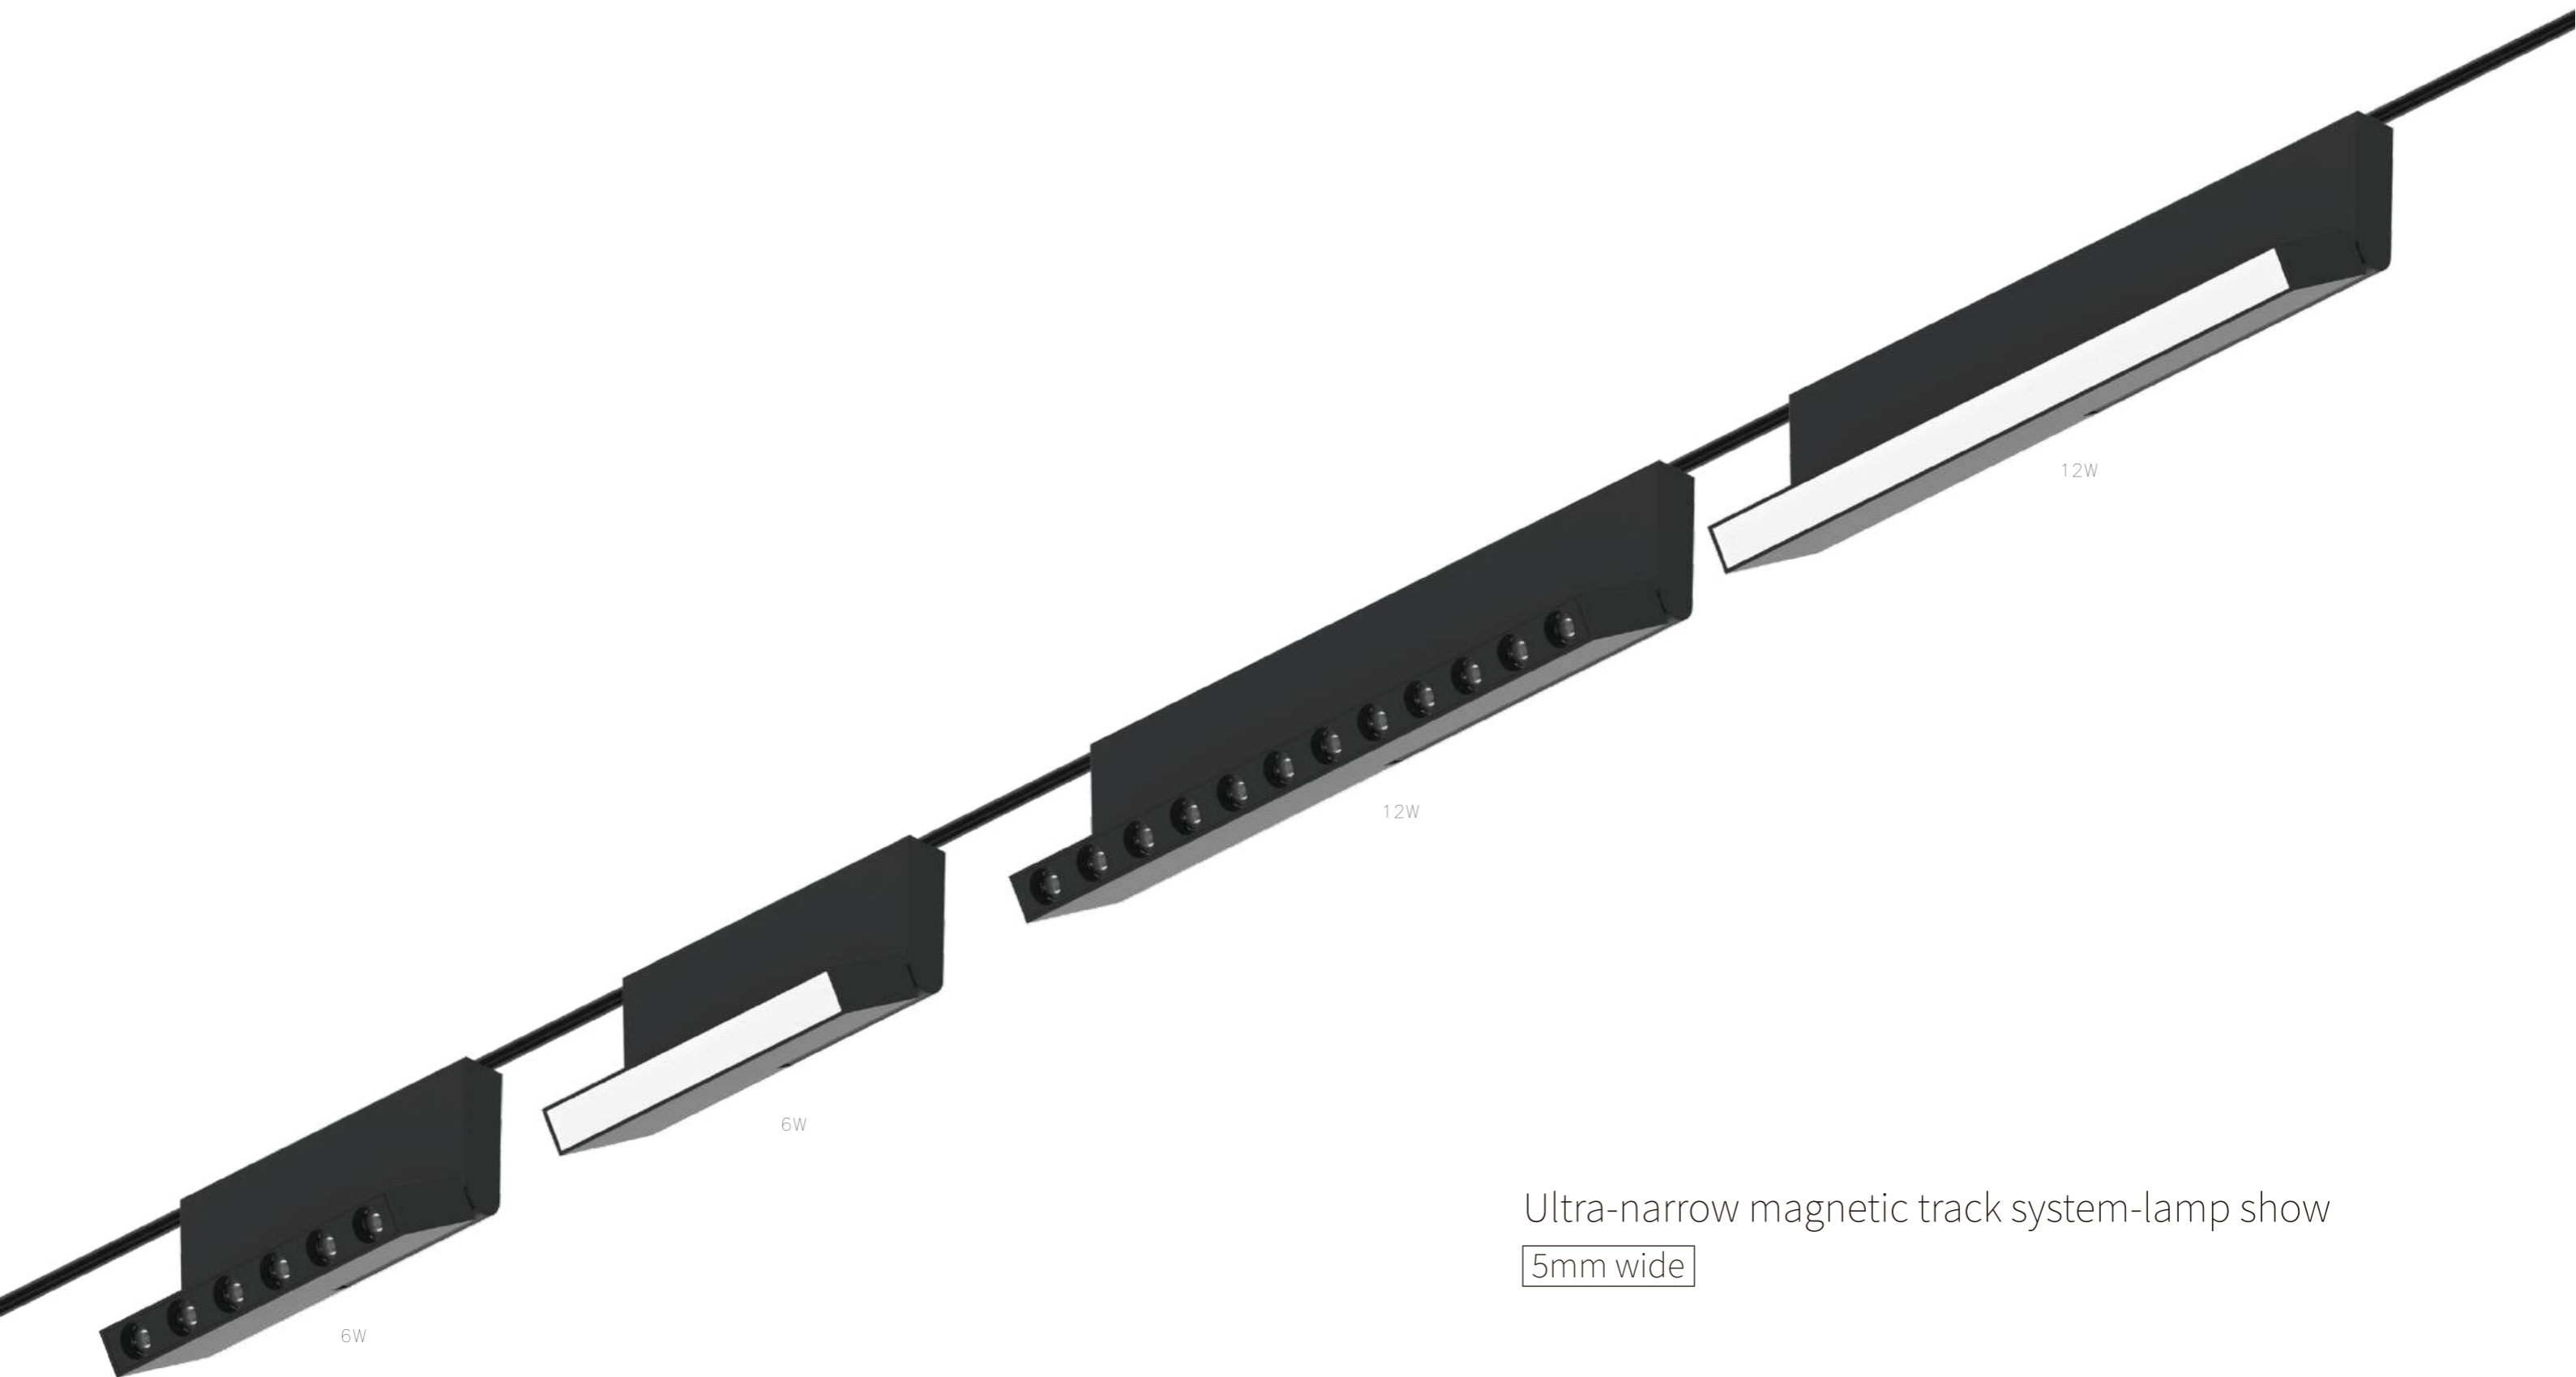

Ultra-narrow magnetic track system-lamp show
5mm wide



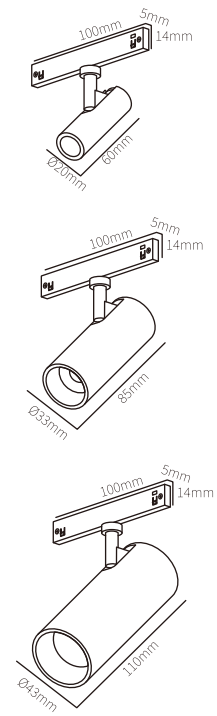

Track Lights

size Ø20*L60mm	size Ø33*L85mm	size Ø43*L110mm
Power 3W	Power 6W	Power 12W
Diffuser lens		
Luminous Angle 24°		
Temperature 3000K / 4000K / 6000K		
Voltage DC24V		
Material Aluminum product		
Body Color Black		
Protection class IP20		
Ambient temperature -20°C~40°C		



swing 90° vertically




swing 90° horizontal





Ultra-narrow magnetic track system-lamp show
5mm wide



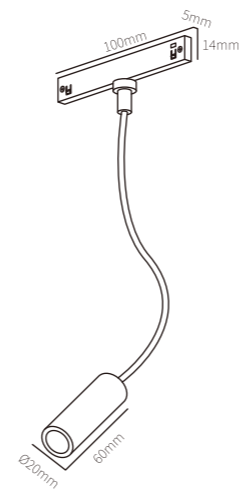

Track type reading light

size

Ø20*L60mm

Power

3W

Diffuser

lens

Luminous Angle

24°

Temperature

3000K / 4000K / 6000K

Voltage

DC24V

Material

Aluminum product

Body Color

Black


Protection class

IP20

Ambient temperature

-20°C~40°C



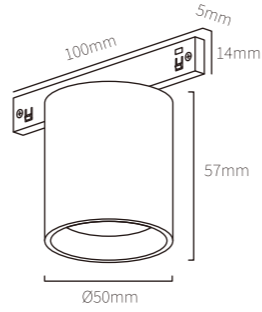

Surface mounted spotlights

size

Ø50*H57mm

Power

6W

Diffuser

lens

Luminous Angle

24°

Temperature

3000K / 4000K / 6000K

Voltage

DC24V

Material

Aluminum product

Body Color


Black


Protection class

IP20

Ambient temperature

-20°C~40°C

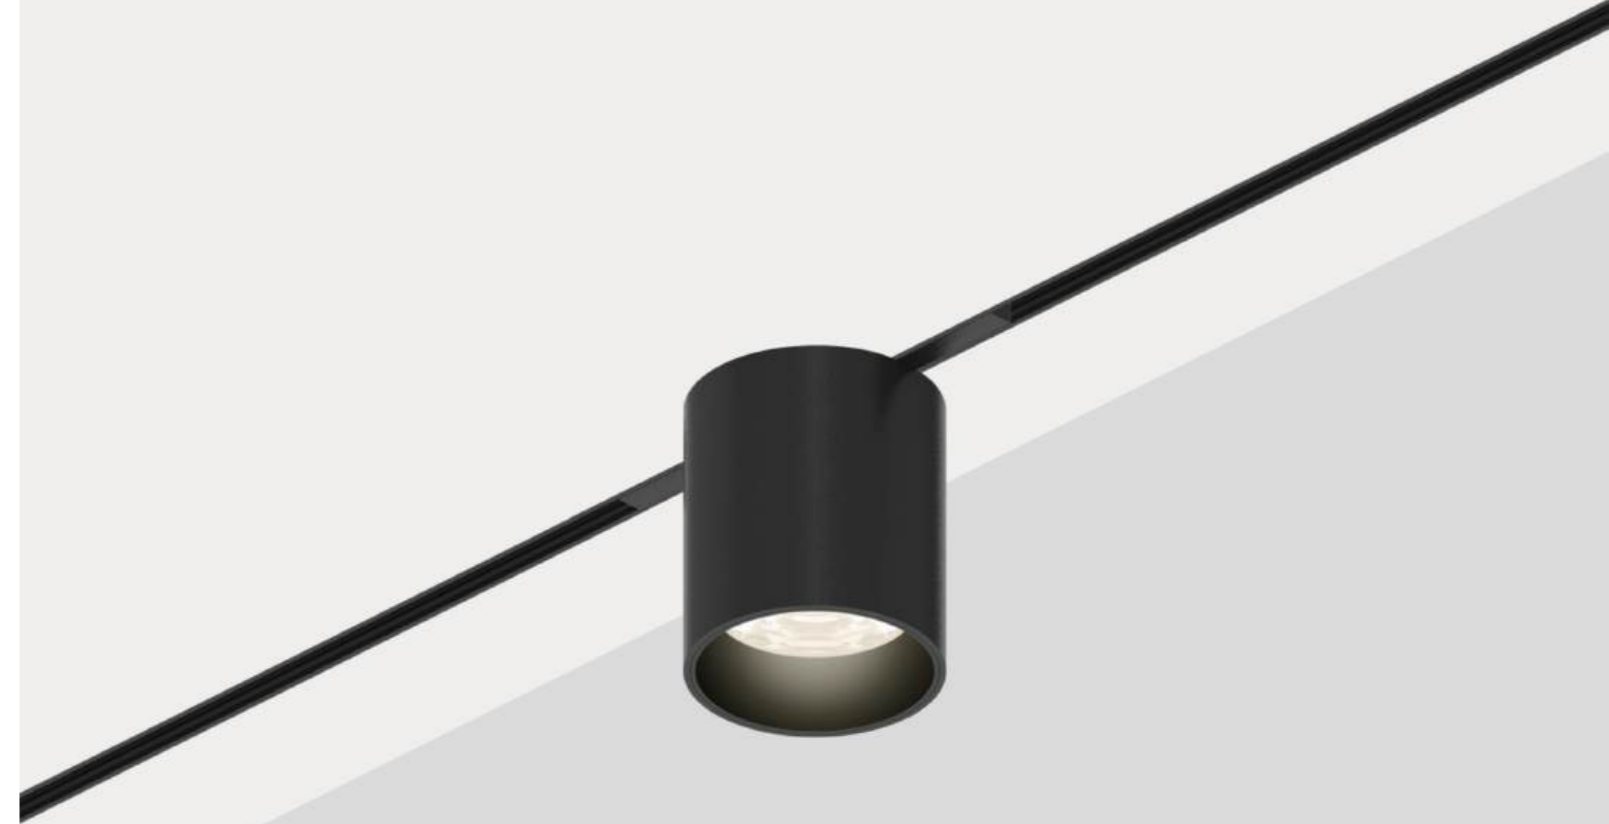

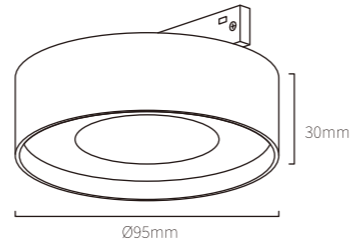

Surface mounted spotlights 9 in 1

size

Ø95*H30mm

Power

9W

Diffuser

lens

Luminous Angle

24°

Temperature

3000K / 4000K / 6000K

Voltage

DC24V

Material

Aluminum product

Body Color


Black


Protection class

IP20

Ambient temperature


-20°C~40°C

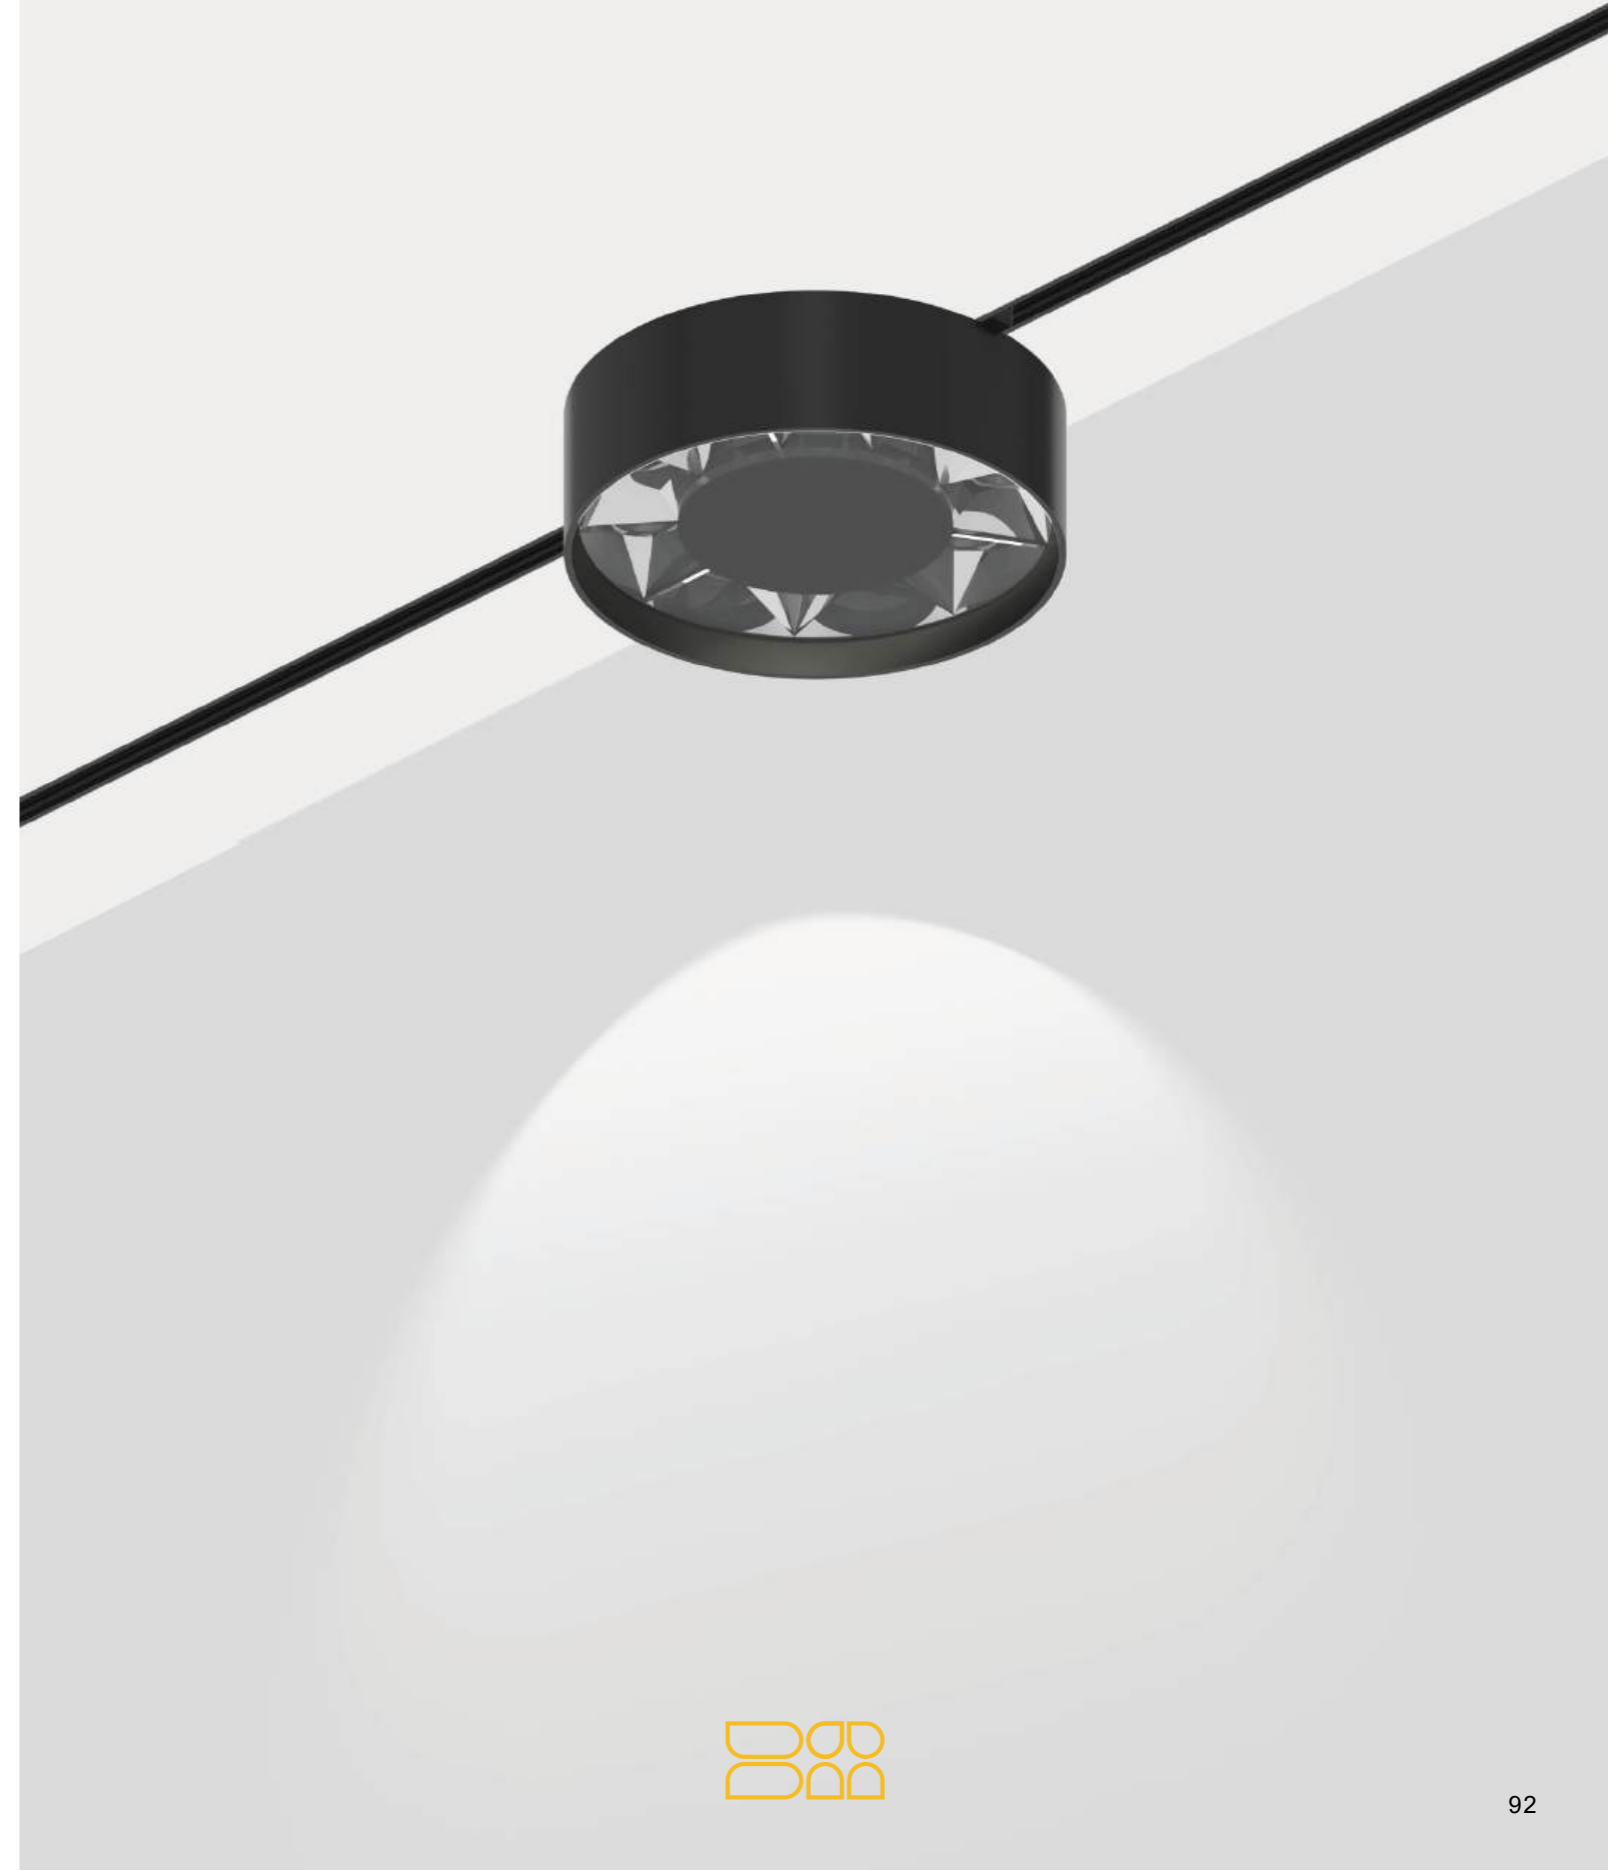


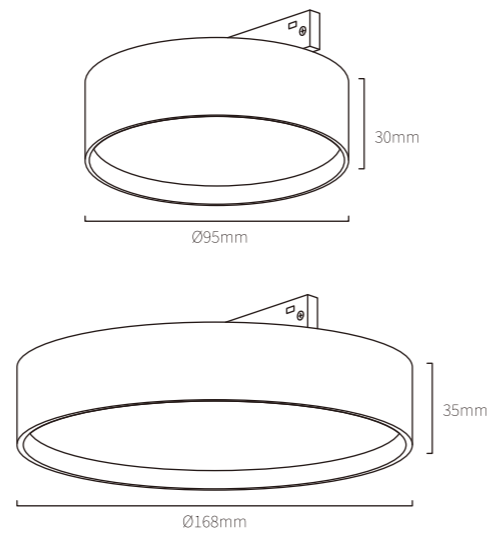


Surface mounted - floodlight

size Ø95*H30mm	size Ø168xH35
Power 9W	Power 18W
Diffuser PC	
Luminous Angle 120°	
Temperature 3000K / 4000K / 6000K	
Voltage DC24V	
Material Aluminum product	
Body Color Black	
Protection class IP20	
Ambient temperature -20°C~40°C	

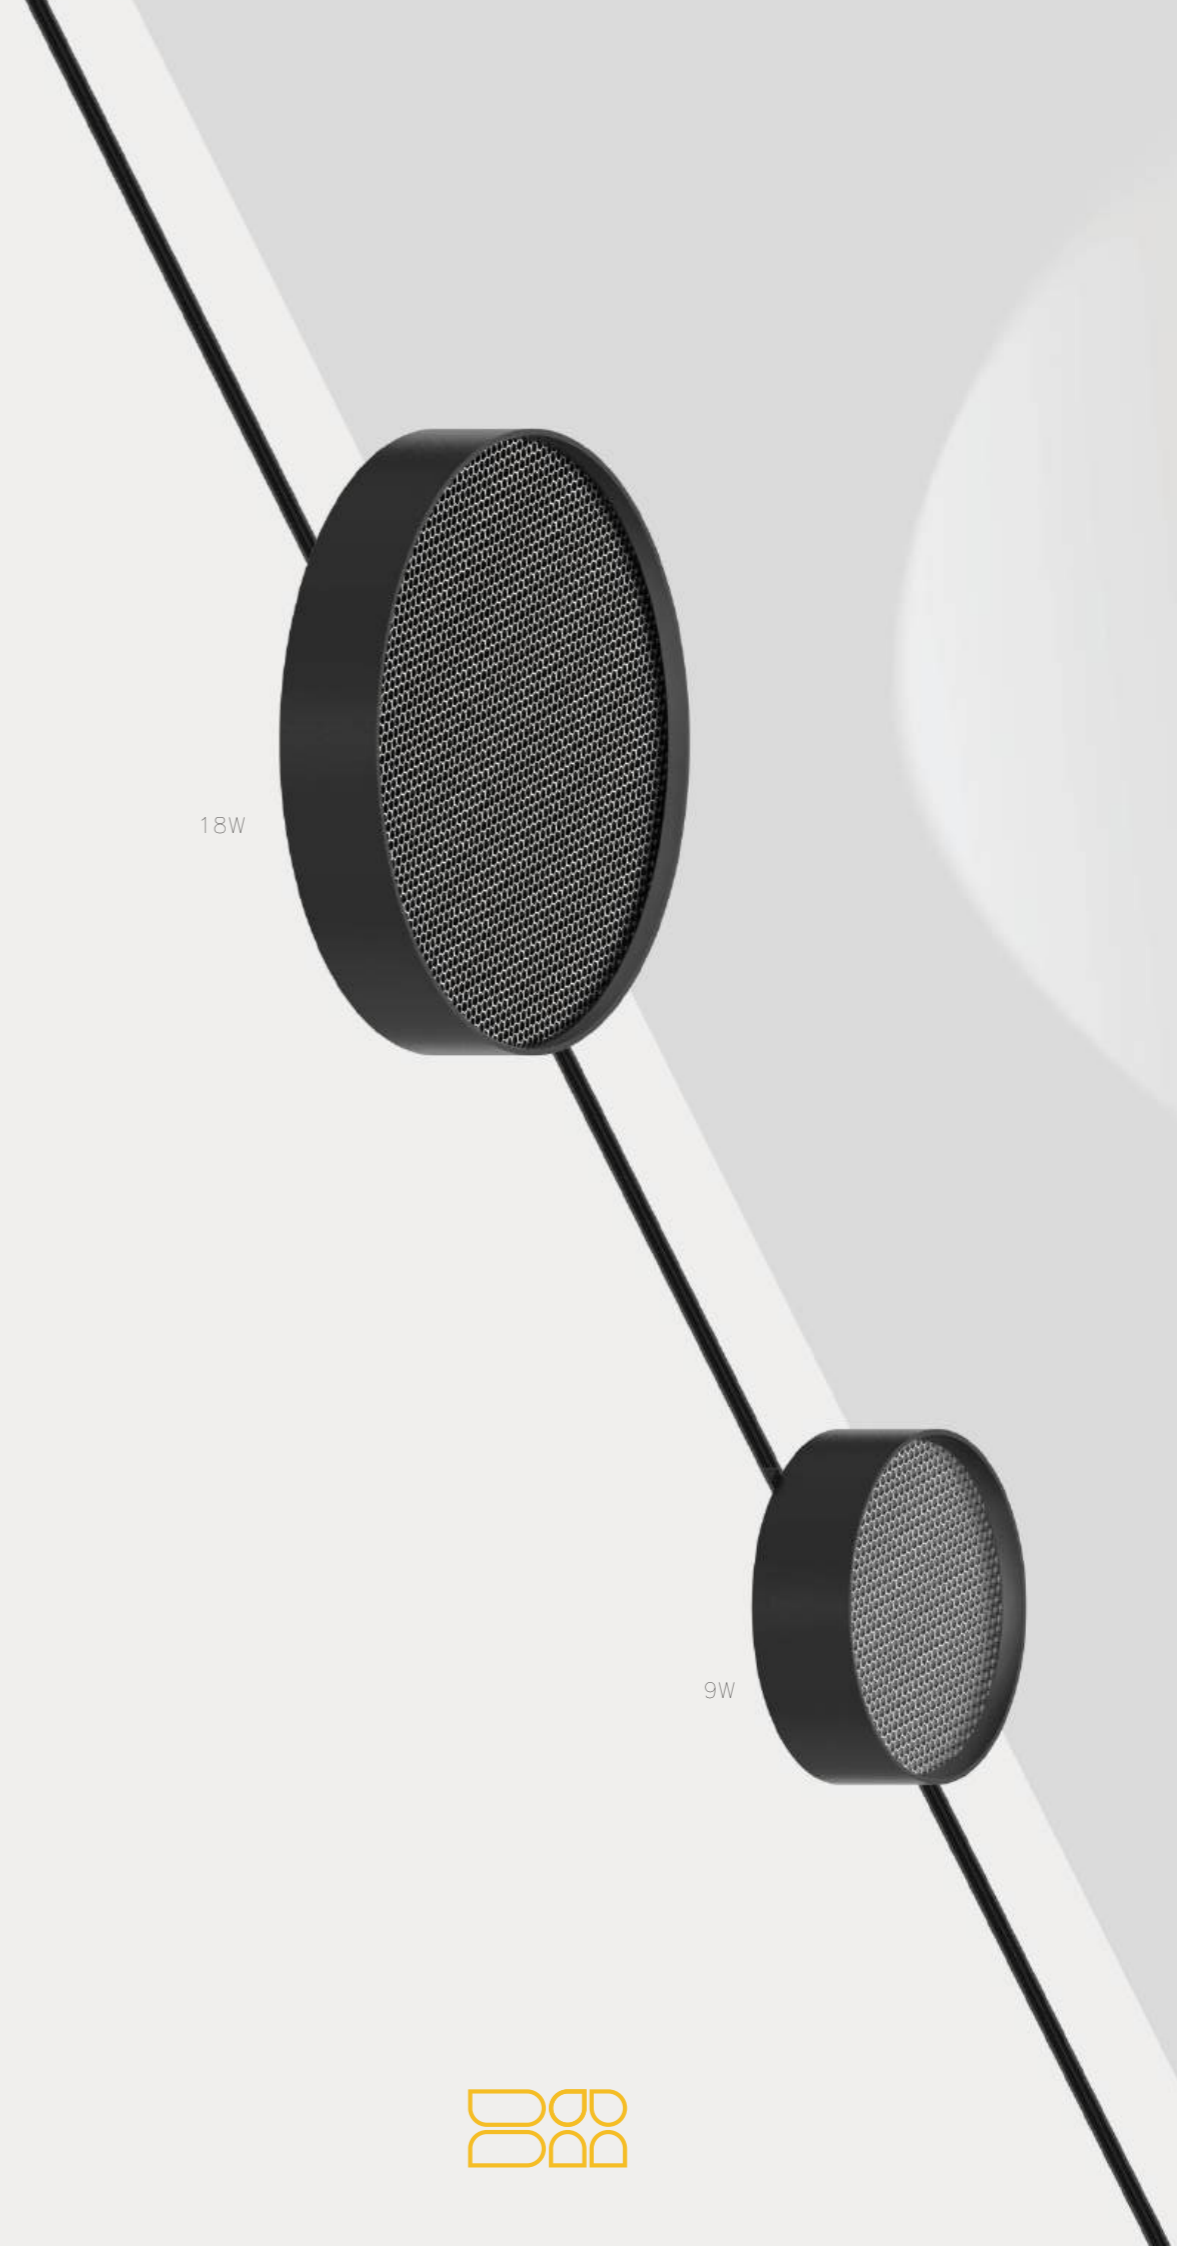

Super slim magnetic track system

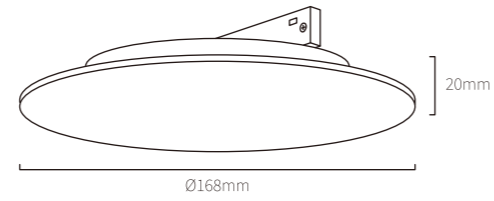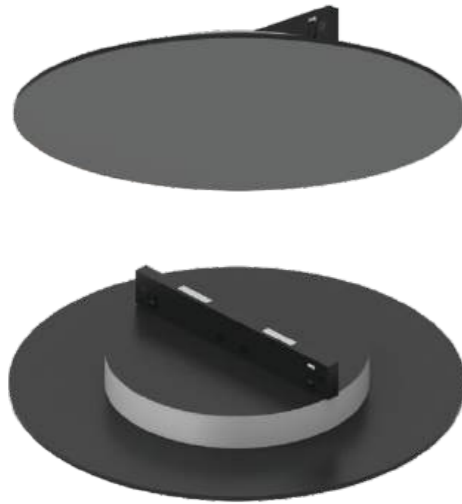

Solar eclipse Wall lamp

size

Ø168xH20mm

Power

9W

Diffuser

PC

Luminous Angle

150°

Temperature

3000K / 4000K / 6000K

Voltage

DC24V

Material

Aluminum product

Body Color


Black


Protection class

IP20

Ambient temperature

-20°C~40°C

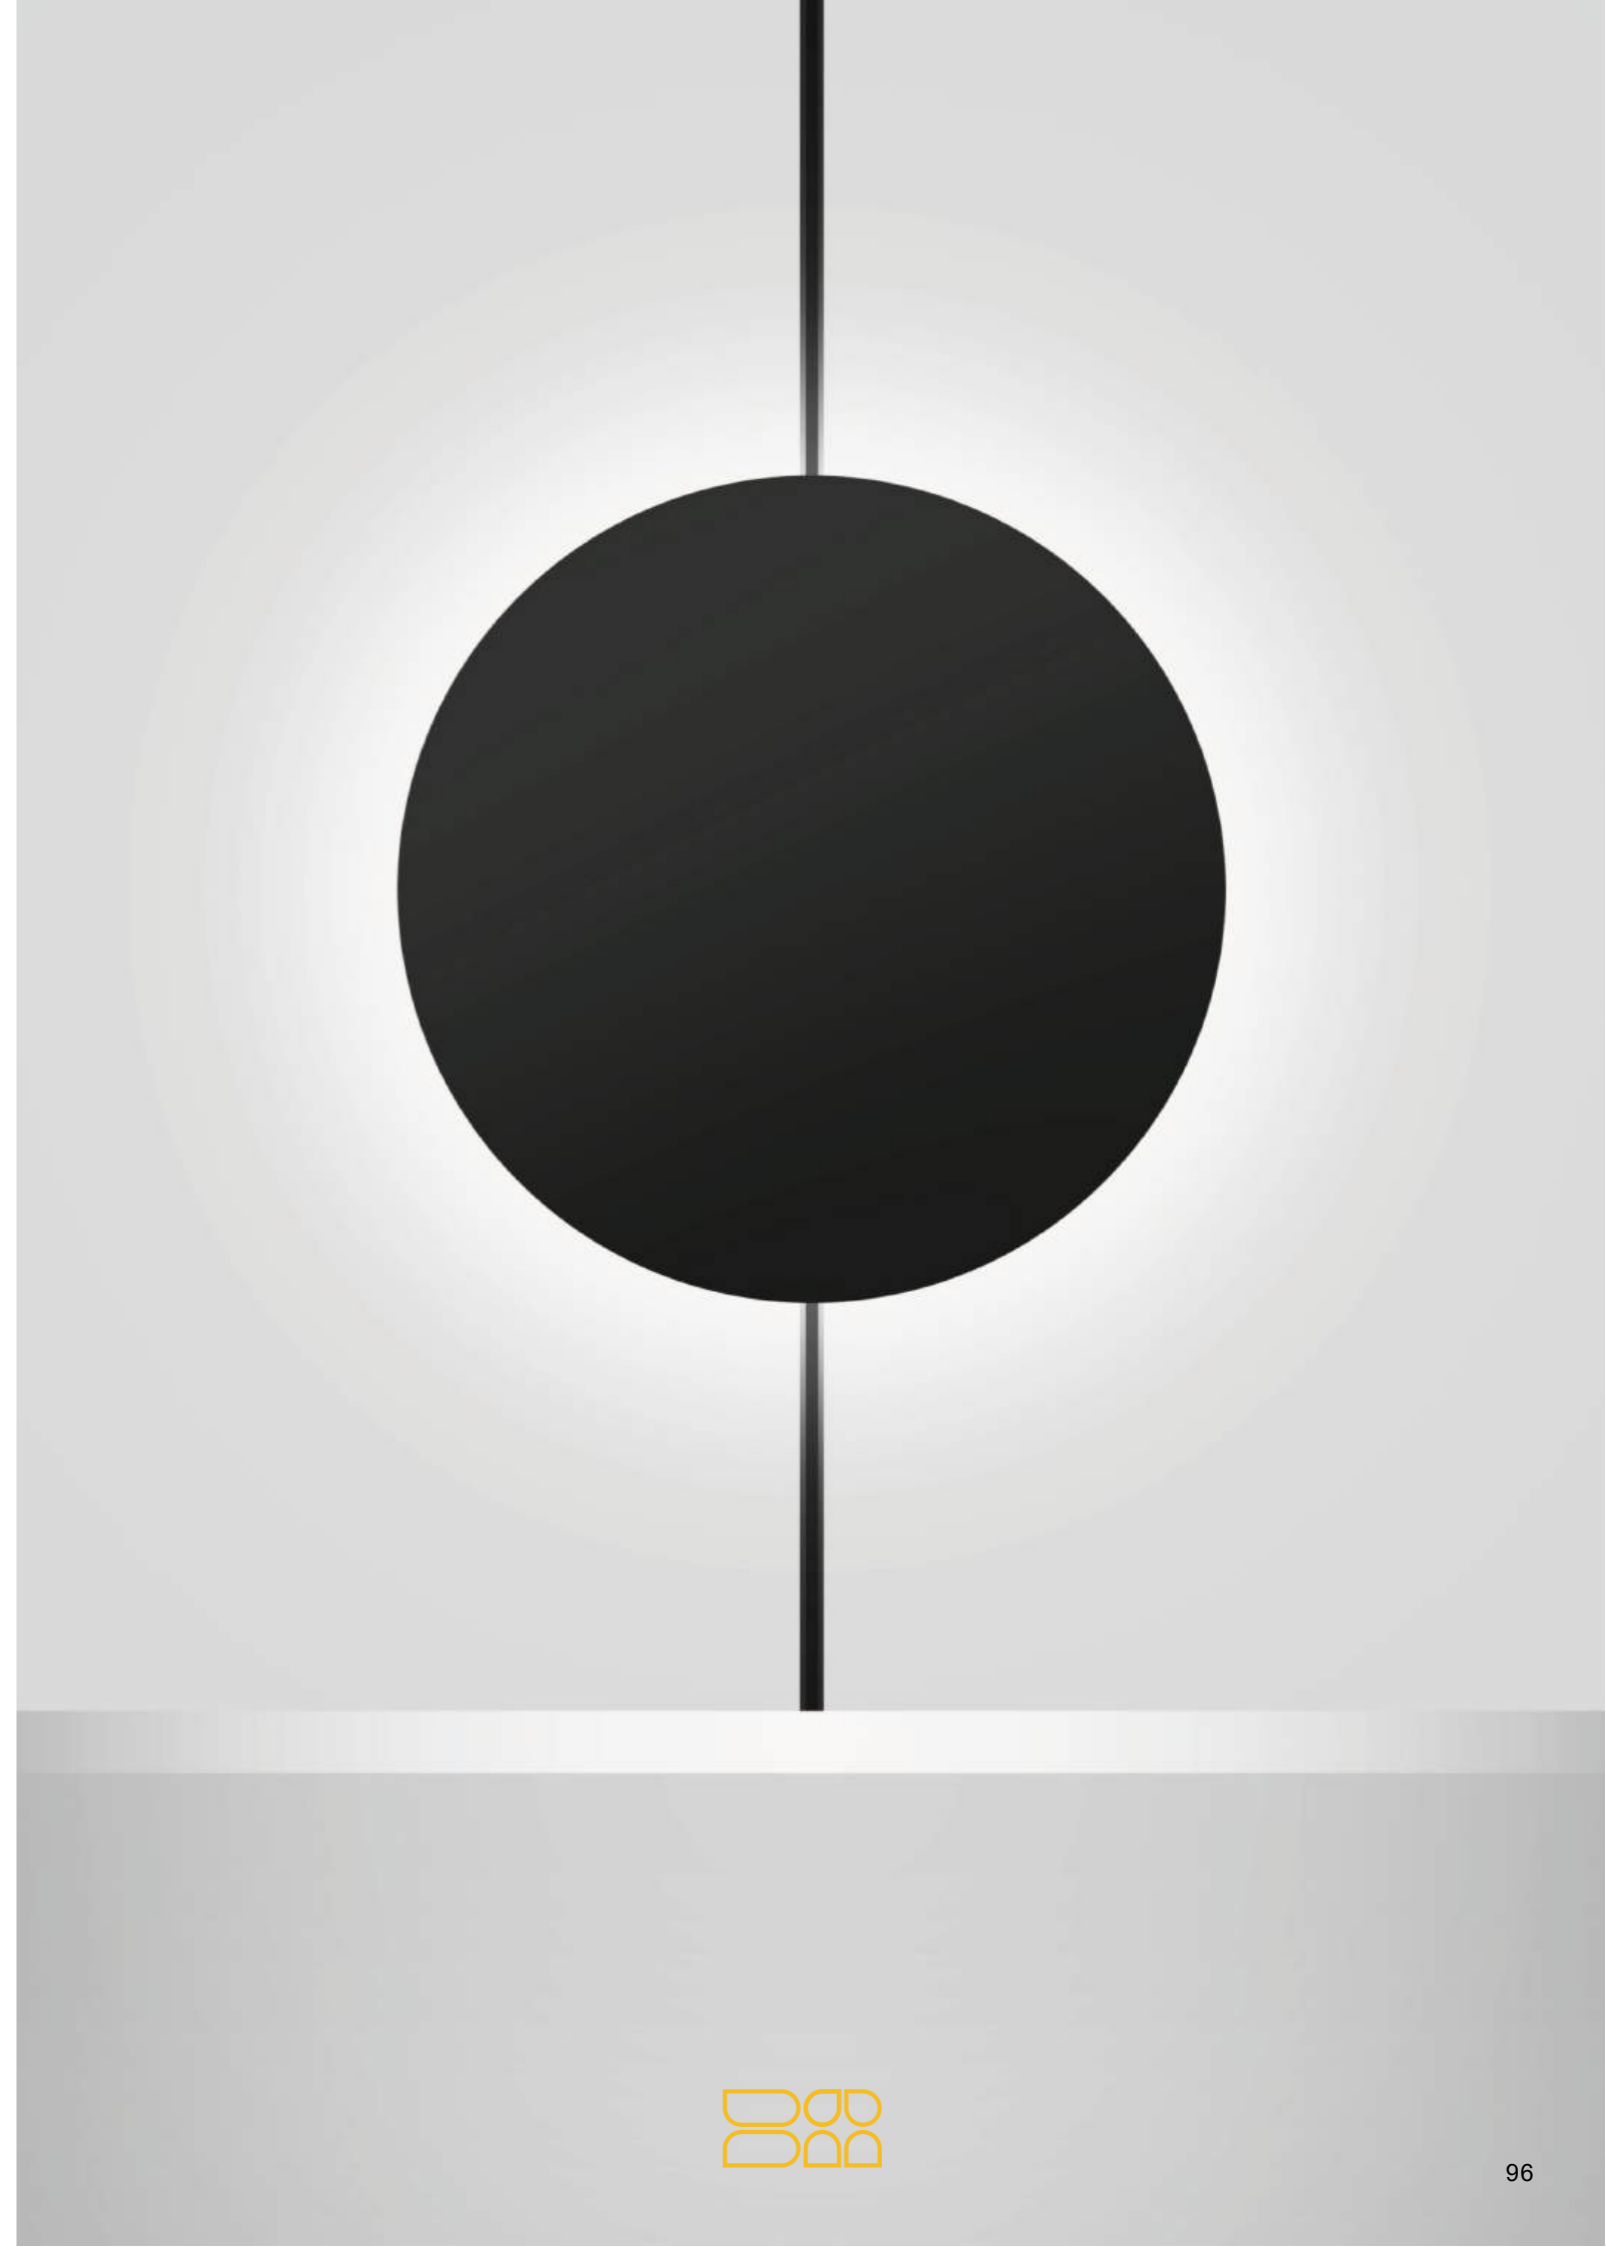

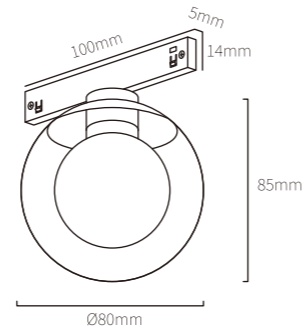

Frosted Glass Ball

size

Ø80*H85mm

Power

6W

Diffuser

glass

Luminous Angle

150°

Temperature

3000K / 4000K / 6000K

Voltage

DC24V

Material

Aluminum product

Body Color

Black


Protection class

IP20

Ambient temperature

-20°C~40°C



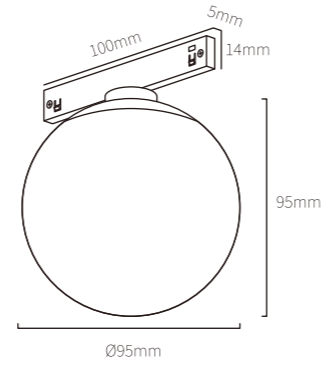

track ball lamp

size

Ø95*H95mm

Power

6W

Diffuser

PC

Luminous Angle

180°

Temperature

3000K / 4000K / 6000K

Voltage

DC24V

Material

Aluminum product

Body Color

Black


Protection class

IP20

Ambient temperature

-20°C~40°C




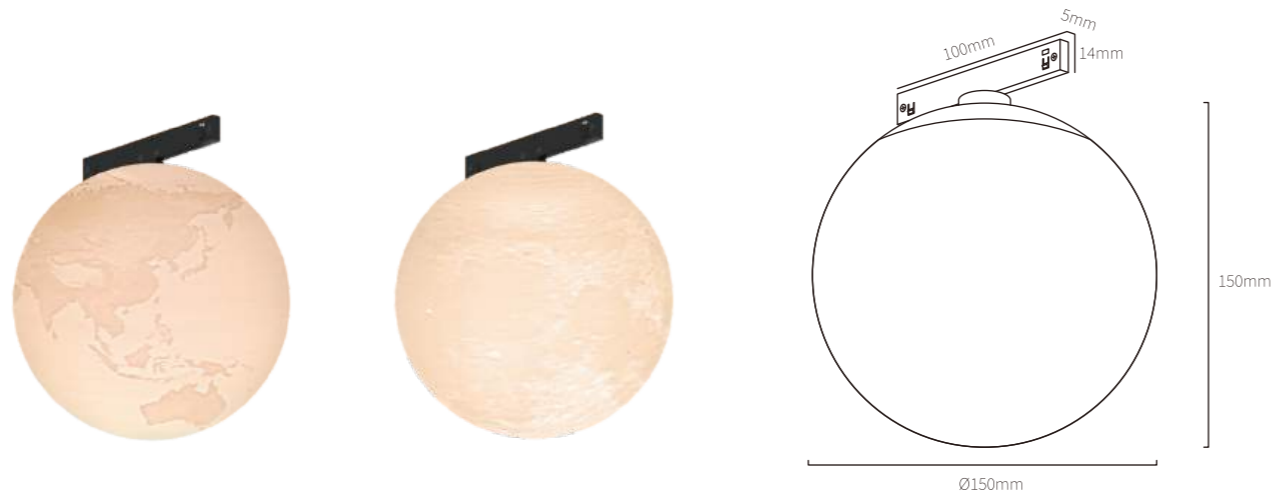

Track type -Earth(Moon)


- | | |
|---|----------------------------|
| size
Ø150*H150mm | size
Ø150*H150mm |
| Power
6W | Power
6W |
| Diffuser
plastic | |
| Luminous Angle
350° | |
| Temperature
3000K / 4000K / 6000K | |
| Voltage
DC24V | |
| Material
Aluminum product | |
| Body Color
Black | |
| Protection class
IP20 | |
| Ambient temperature
-20°C~40°C | |



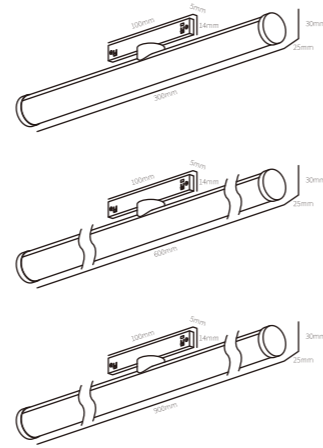

Stick - floodlight


size L300xW25xH30mm	size L600xW25xH30mm	size L900xW25xH30mm
Power 9W	Power 18W	Power 27W
Diffuser PC		
Luminous Angle 180°		
Temperature 3000K / 4000K / 6000K		
Voltage DC24V		
Material Aluminum product		
Body Color Black		
Protection class IP20		
Ambient temperature -20°C~40°C		

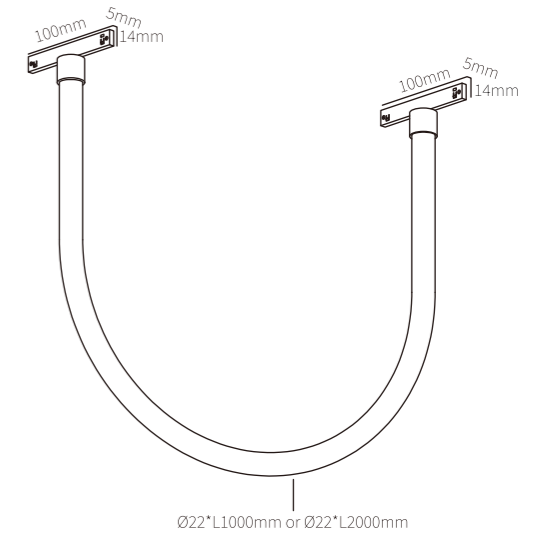

Silicone light tube

size Ø22*L1000mm	size Ø22*L2000mm
Power 14W	Power 28W
Diffuser Silicone tube	
Luminous Angle 360°	
Temperature 3000K / 4000K / 6000K	
Voltage DC24V	
Material Aluminum product	
Body Color Black	
Protection class IP20	
Ambient temperature -20°C~40°C	



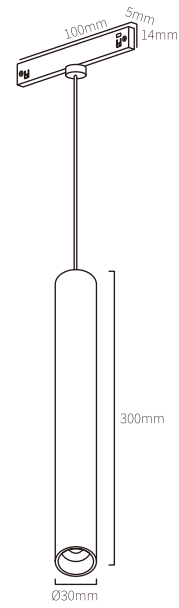

Hoisting-Straight cylinder

size

Ø30*L300mm

Power

6W

Diffuser

lens

Luminous Angle

24°

Temperature

3000K / 4000K / 6000K

Voltage

DC24V

Material

Aluminum product

Body Color

Black

Protection class

IP20


Ambient temperature

-20°C~40°C





Suspended spherical lamp

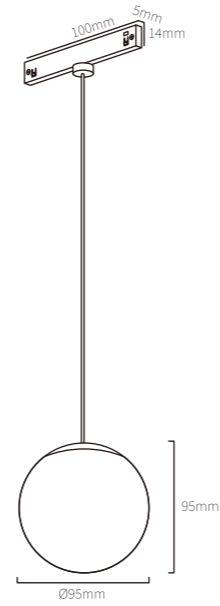

size

Ø95*H95mm

Power

6W

Diffuser

PC

Luminous Angle

180°

Temperature

3000K / 4000K / 6000K

Voltage

DC24V

Material

Aluminum product

Body Color

Black


Protection class

IP20

Ambient temperature

-20°C~40°C



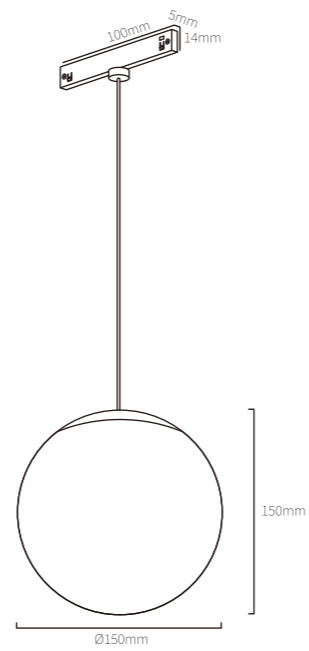

Planet chandelier -Earth(Moon)

- | | |
|---|----------------------------|
| size
Ø150*H150mm | size
Ø150*H150mm |
| Power
6W | Power
6W |
| Diffuser
plastic | |
| Luminous Angle
350° | |
| Temperature
3000K / 4000K / 6000K | |
| Voltage
DC24V | |
| Material
Aluminum product | |
| Body Color
Black | |
| Protection class
IP20 | |
| Ambient temperature
-20°C~40°C | |





Colorful flexibility
Orbital system





Colorful Series 2025



The advantages of flexible tracks lie in their rapid installation and the ability to be simply bent at the construction site to fit. According to the lighting requirements and any geometric shape required by the building, it can be outlined to varying degrees. Curves, free and smooth shapes, combined with rich light performance.



A variety of colors are available for selection and free combination



Black



Gray




Green



Khaki



Orange

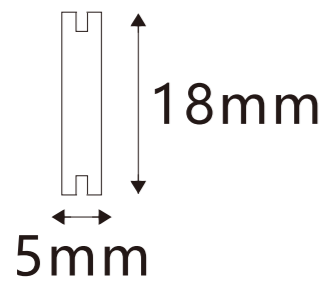

Minimum dimensions

In a minimum cross-section, two copper conductors are co-extruded with a section of thermoplastic elastomer, but still completely and safely exposed.

A slender harmonic steel band extends along the back, forming an outline and allowing different geometries to be woven and maintained. The track becomes a band that can be simply bent at the construction site to adapt to any geometric shape determined by lighting requirements and architecture.

The thermoplastic elastomer is extruded together with the positive and negative poles of the copper conductor



Sustainability


Due to its material properties, the track can be cut and folded in situ with a minimum radius of 300 millimeters.

■ Track delivery




5-10-20 meters per roll




■ Minimum curvature radius

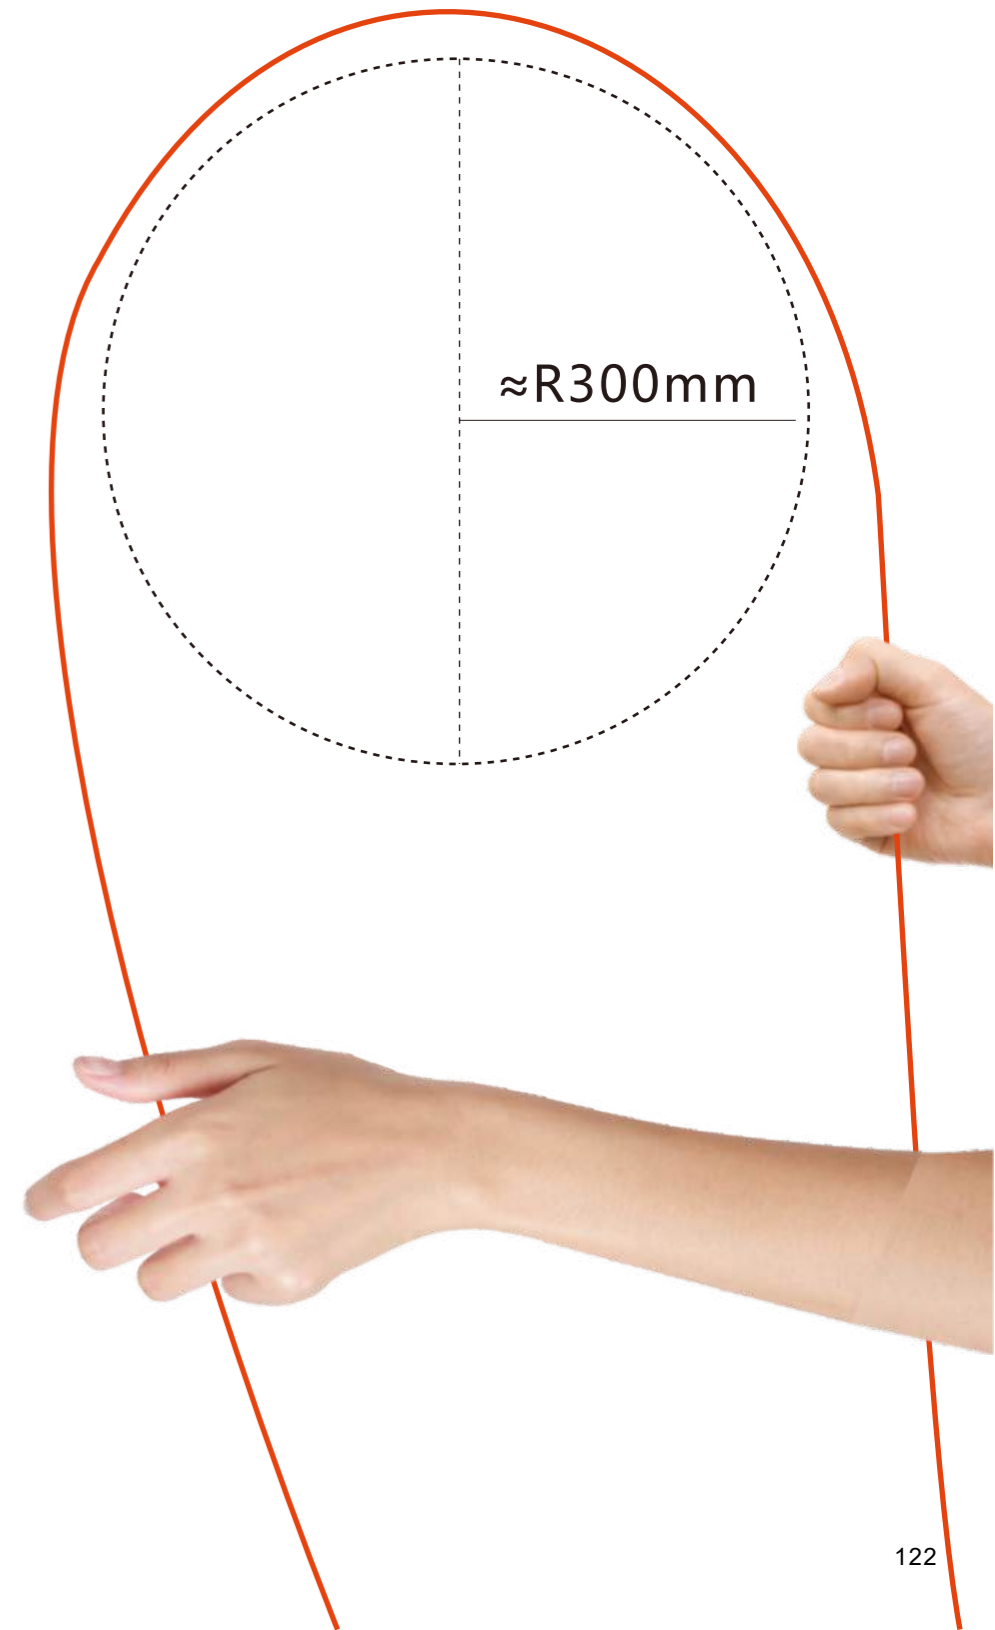

More and more configurations, from the smallest to the largest extensions, some cases of wall and ceiling layouts

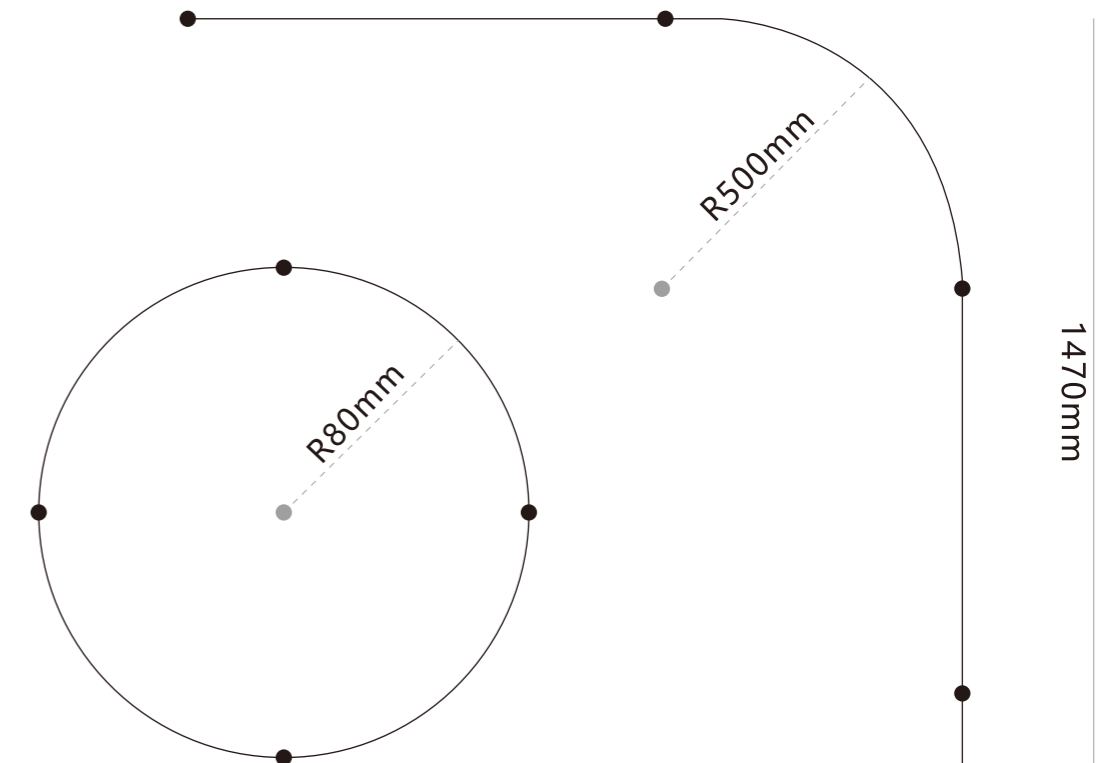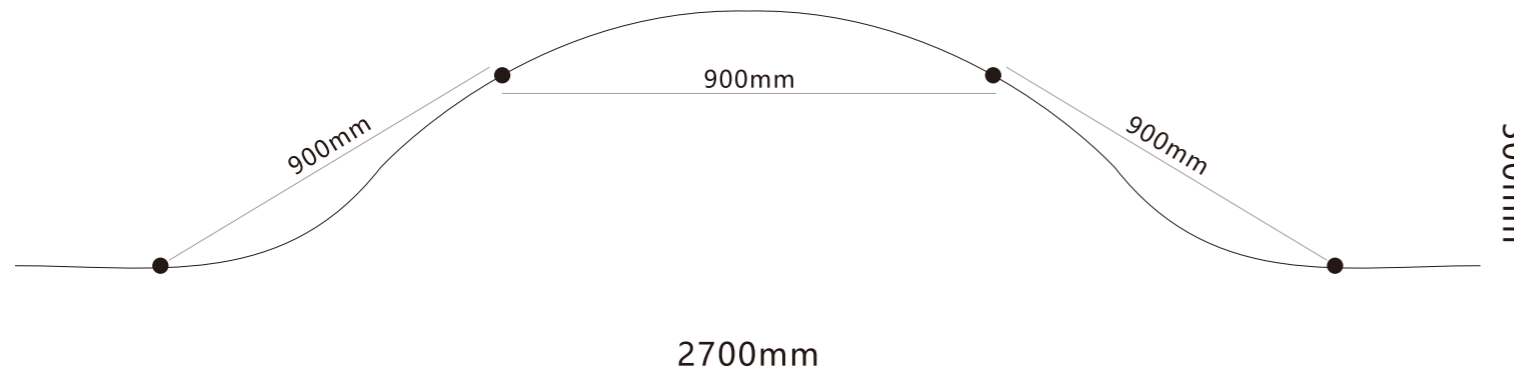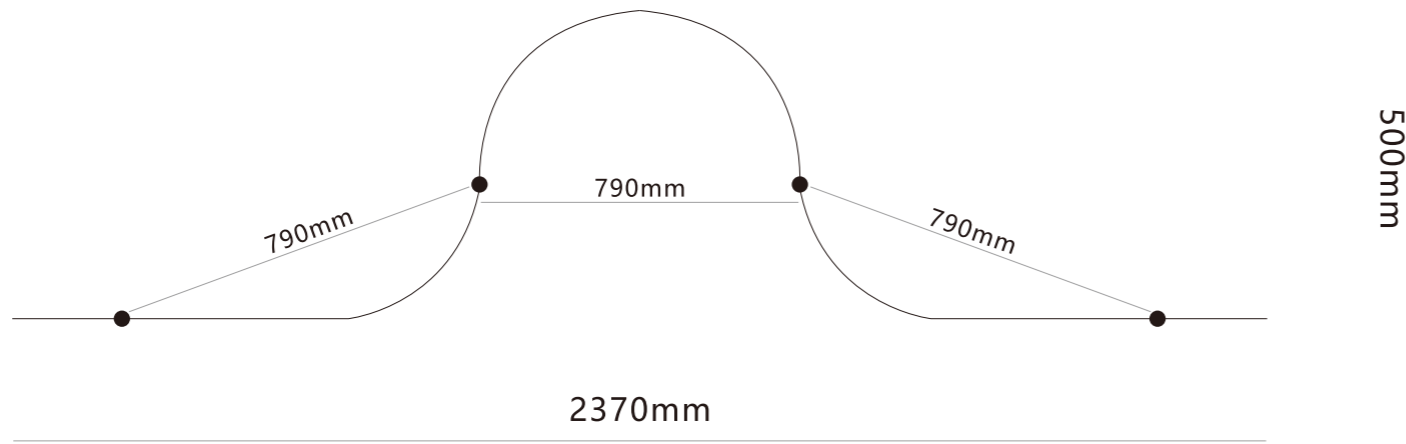

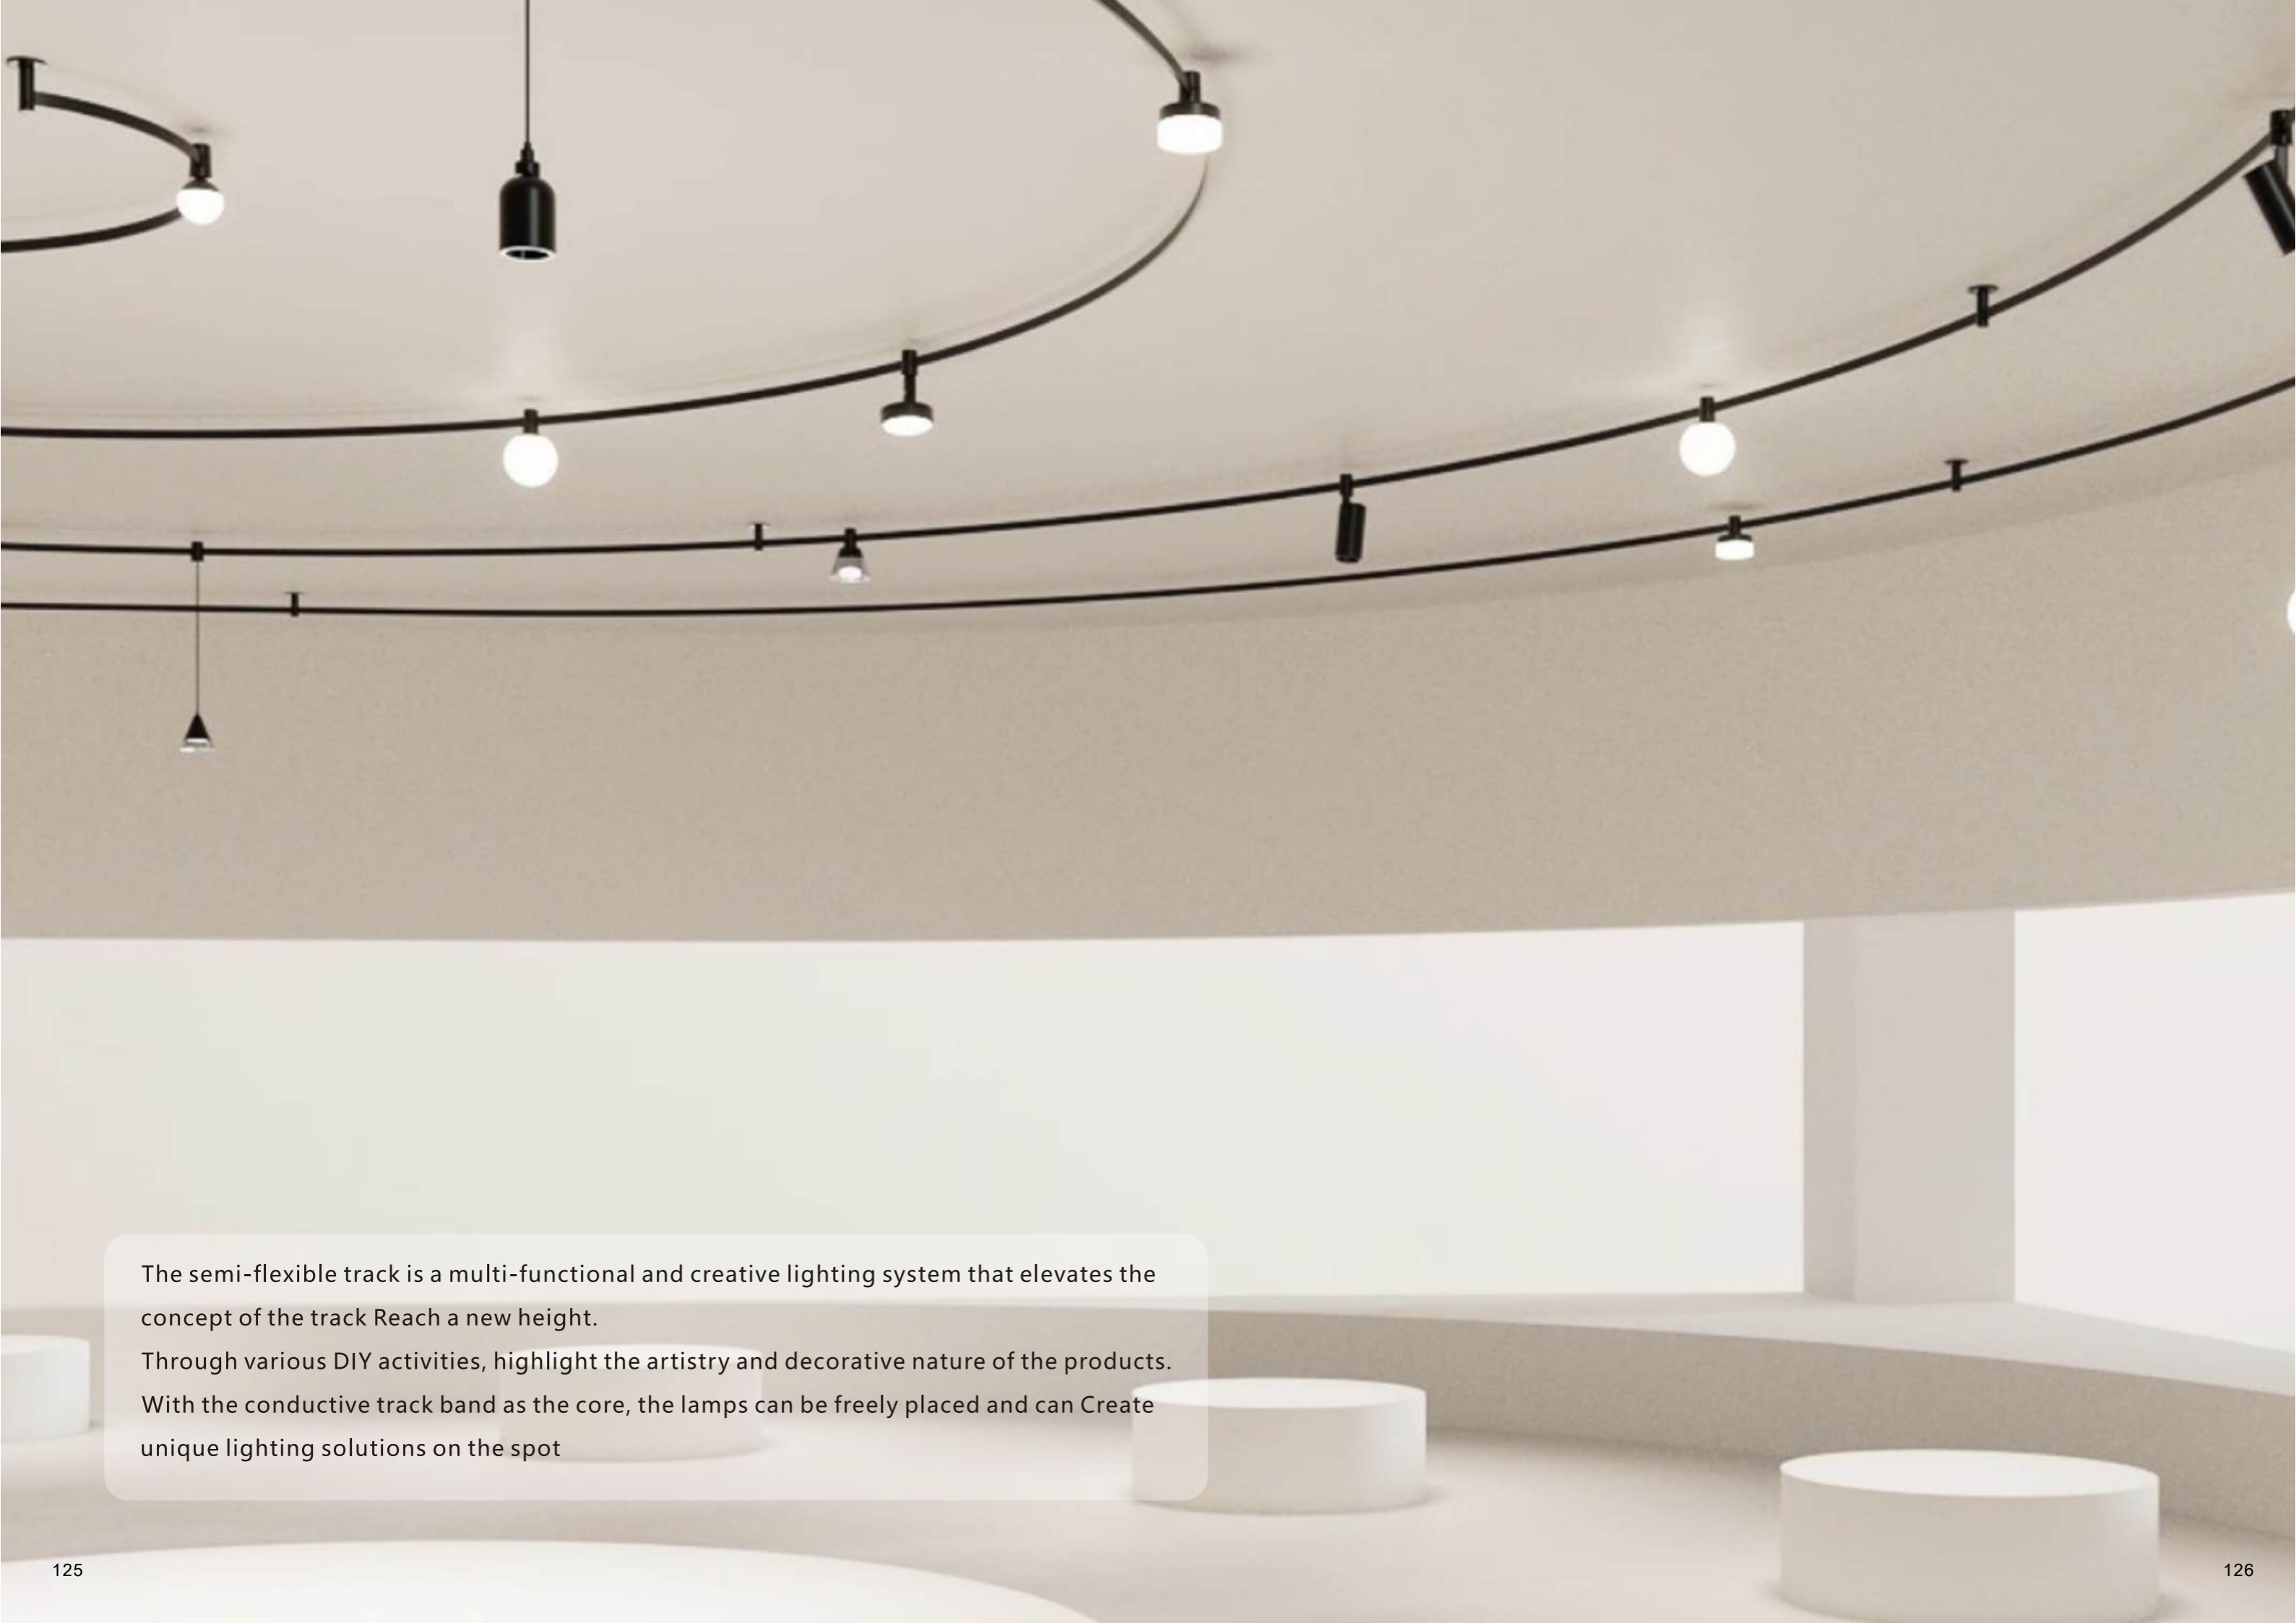


The semi-flexible track is a multi-functional and creative lighting system that elevates the concept of the track Reach a new height.

Through various DIY activities, highlight the artistry and decorative nature of the products. With the conductive track band as the core, the lamps can be freely placed and can Create unique lighting solutions on the spot



Ultra-thin flexible linear track - used in combination
Choose the installation method you like according to your needs

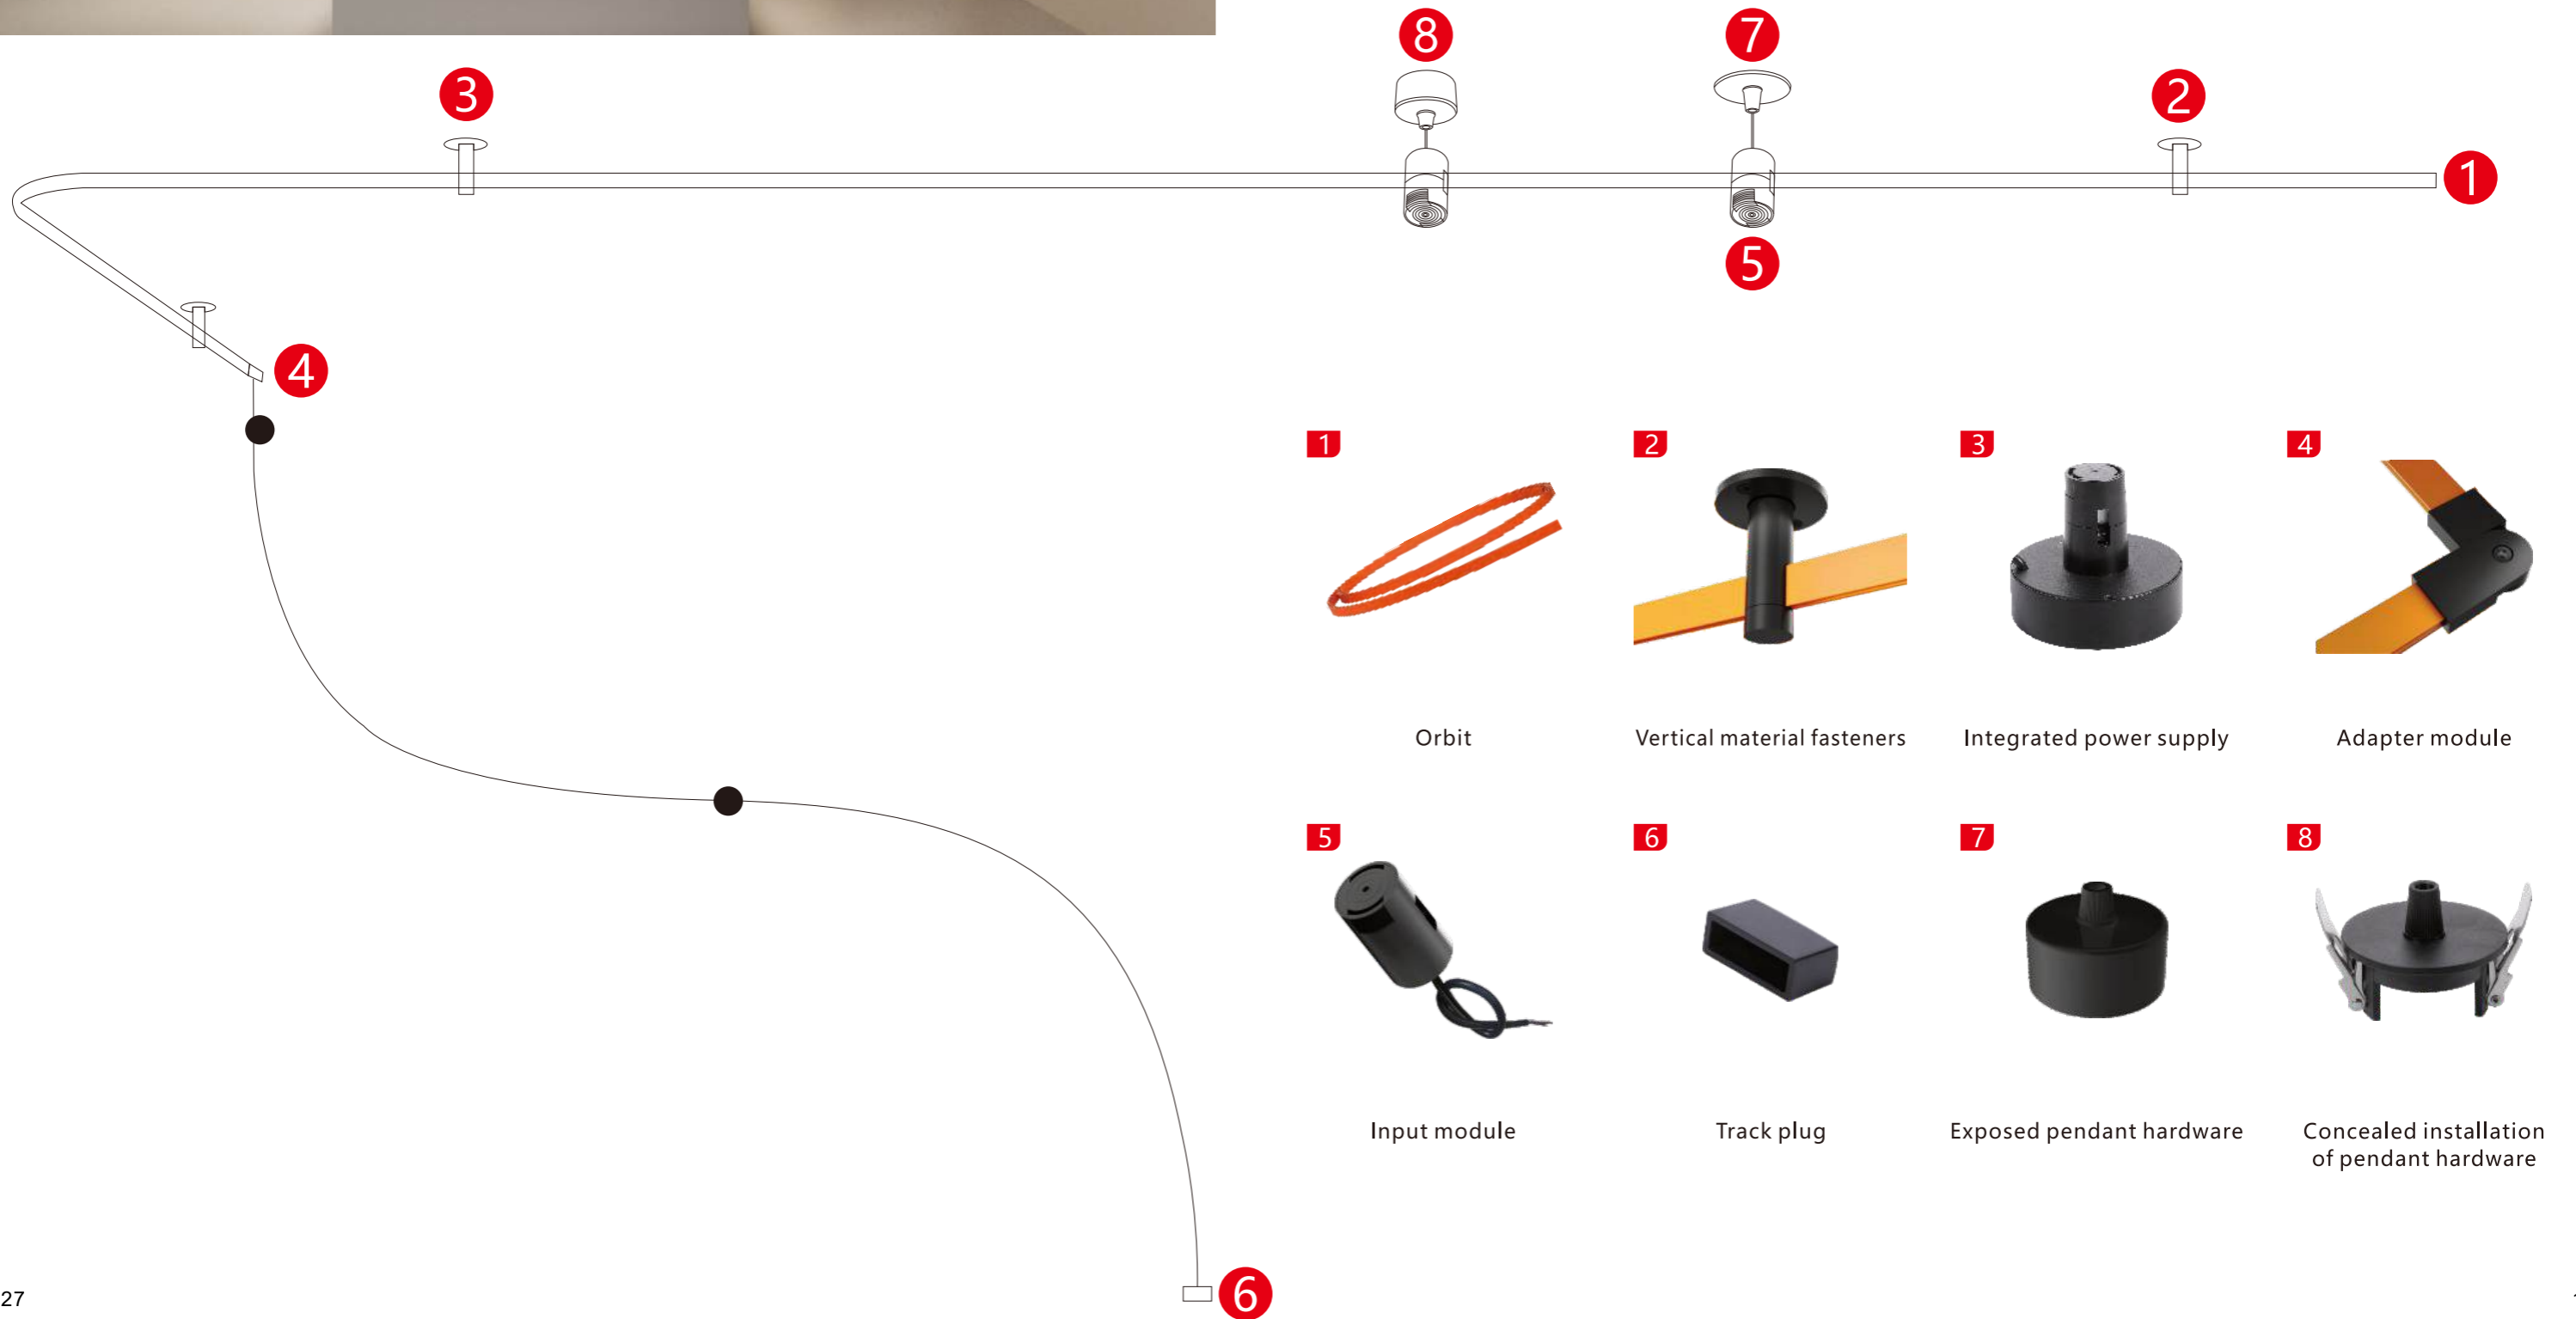

Flexible track accessories




Concealed installation of pendant hardware

Product Size: $\Phi 60 \times H 50 \text{mm}$


Function

1. Concealed wire cover for external power supply on the ceiling.
2. Suitable for ceiling and wall installation.

Installation steps

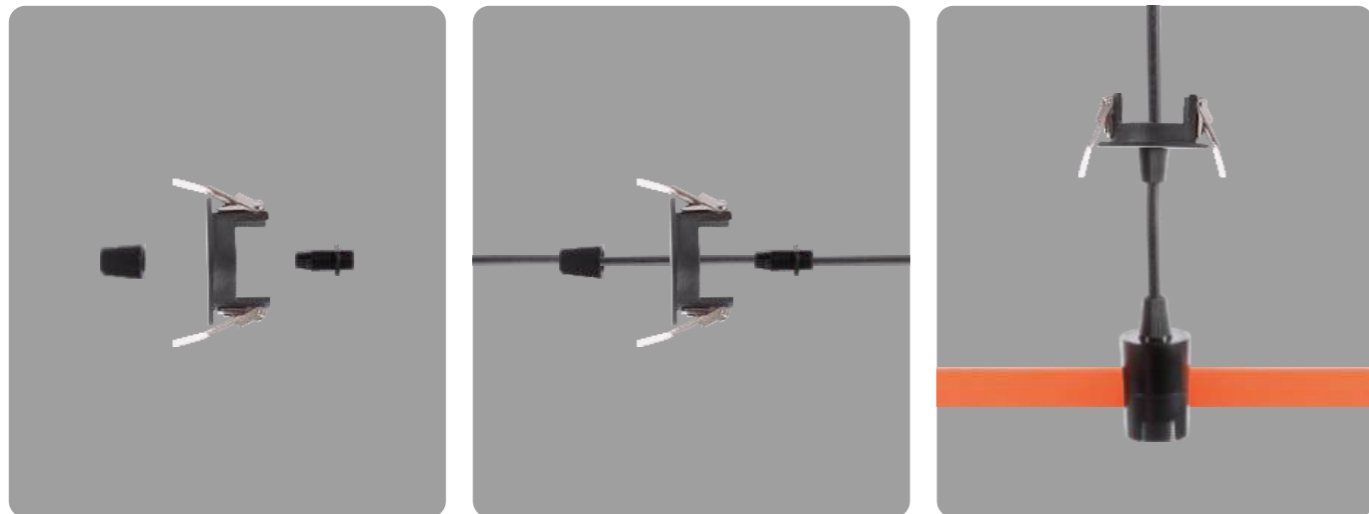

Braided track accessories

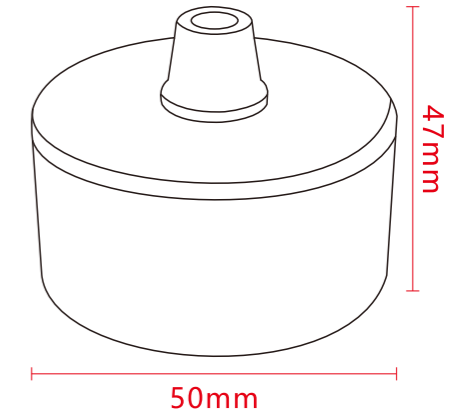


Exposed pendant hardware

Product Size: $\Phi 60 \times H 50 \text{mm}$


Function

1. Ceiling exposed concealed wire cover.
2. Suitable for ceiling and wall installation.

Installation steps

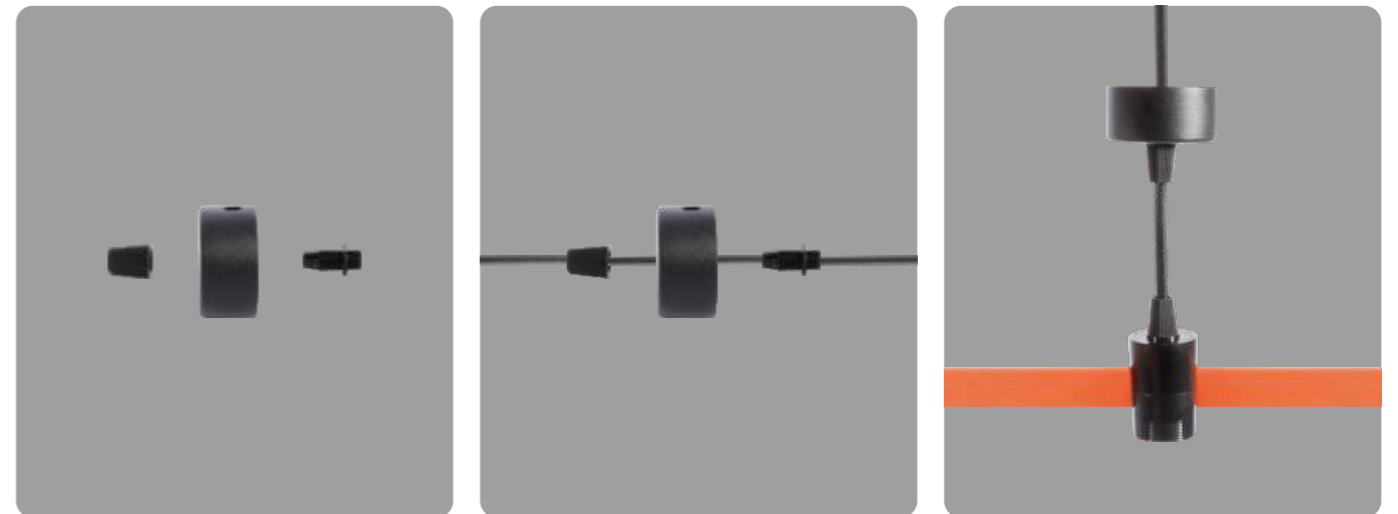

Braided track accessories

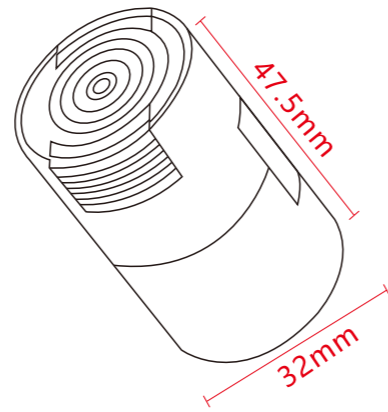

Input module

Product Size: $\Phi 32 \times H 47.5 \text{mm}$


Function

1. Orbital conductive conversion function.
2. Rail power supply function.
3. Installation of accessories and hardware.

Installation steps



Braided track accessories

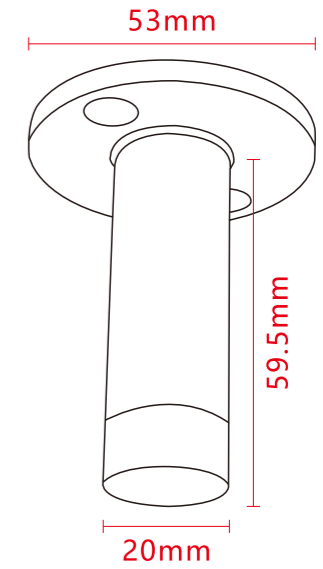

Plastic fixation

Product Size: $59.5 \times 20 \times 53 \text{mm}$



Function

1. Semi-flexible plastic hardware track fixing head.

Installation steps



Braided track accessories

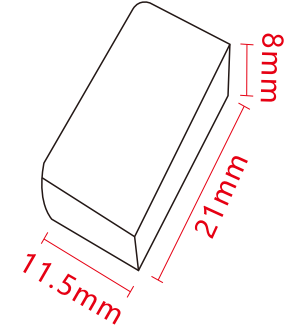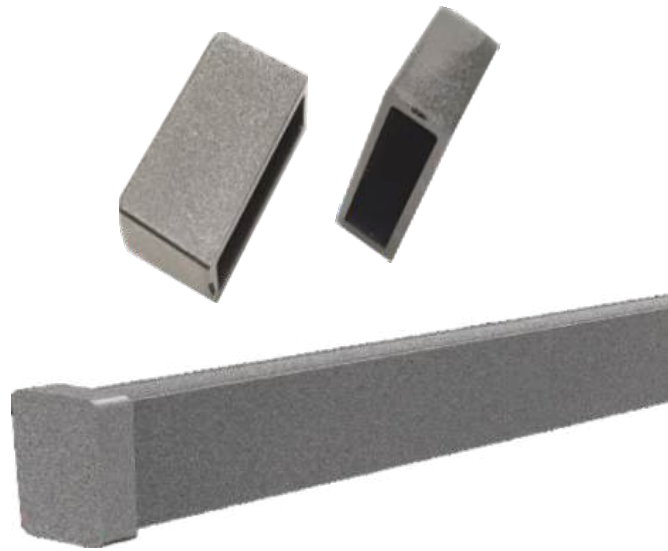



Track plug

Product Size: 21×8×11.5mm


Function

1. Track plug cover.
2. Aesthetic function.

Installation steps

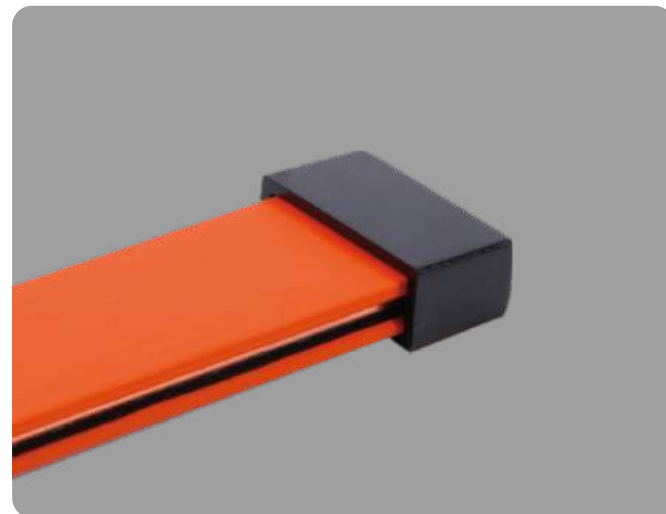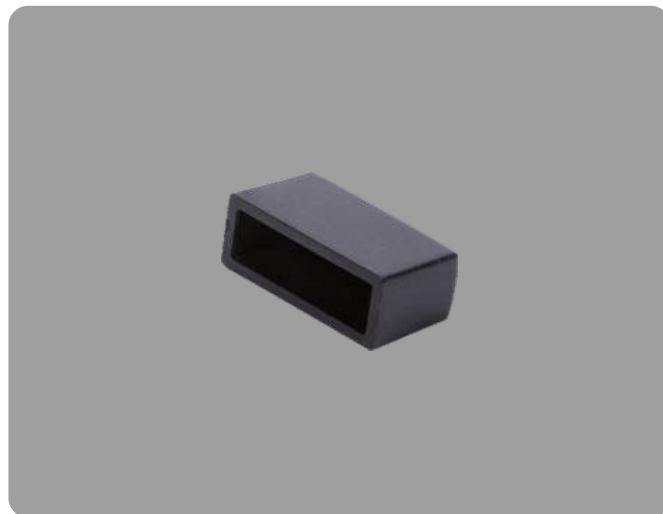

Braided track accessories

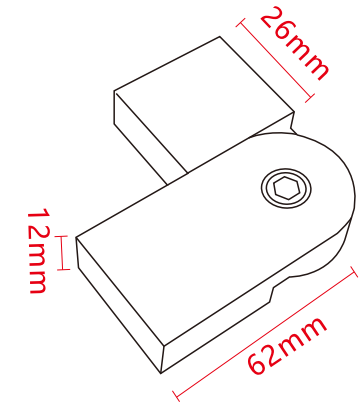


Adapter module

Product Size: 62×26×12mm

Function


1. Hardware connectors for semi-flexible tracks.
2. Change the direction of the orbit.

Installation steps

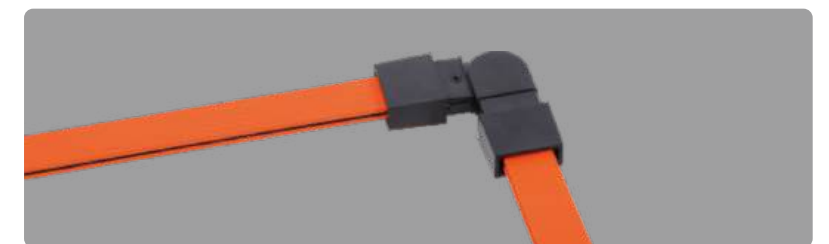


It is a great idea to continuously connect the tracks to create the required shapes, which is very practical.
Applicable to commercial Spaces



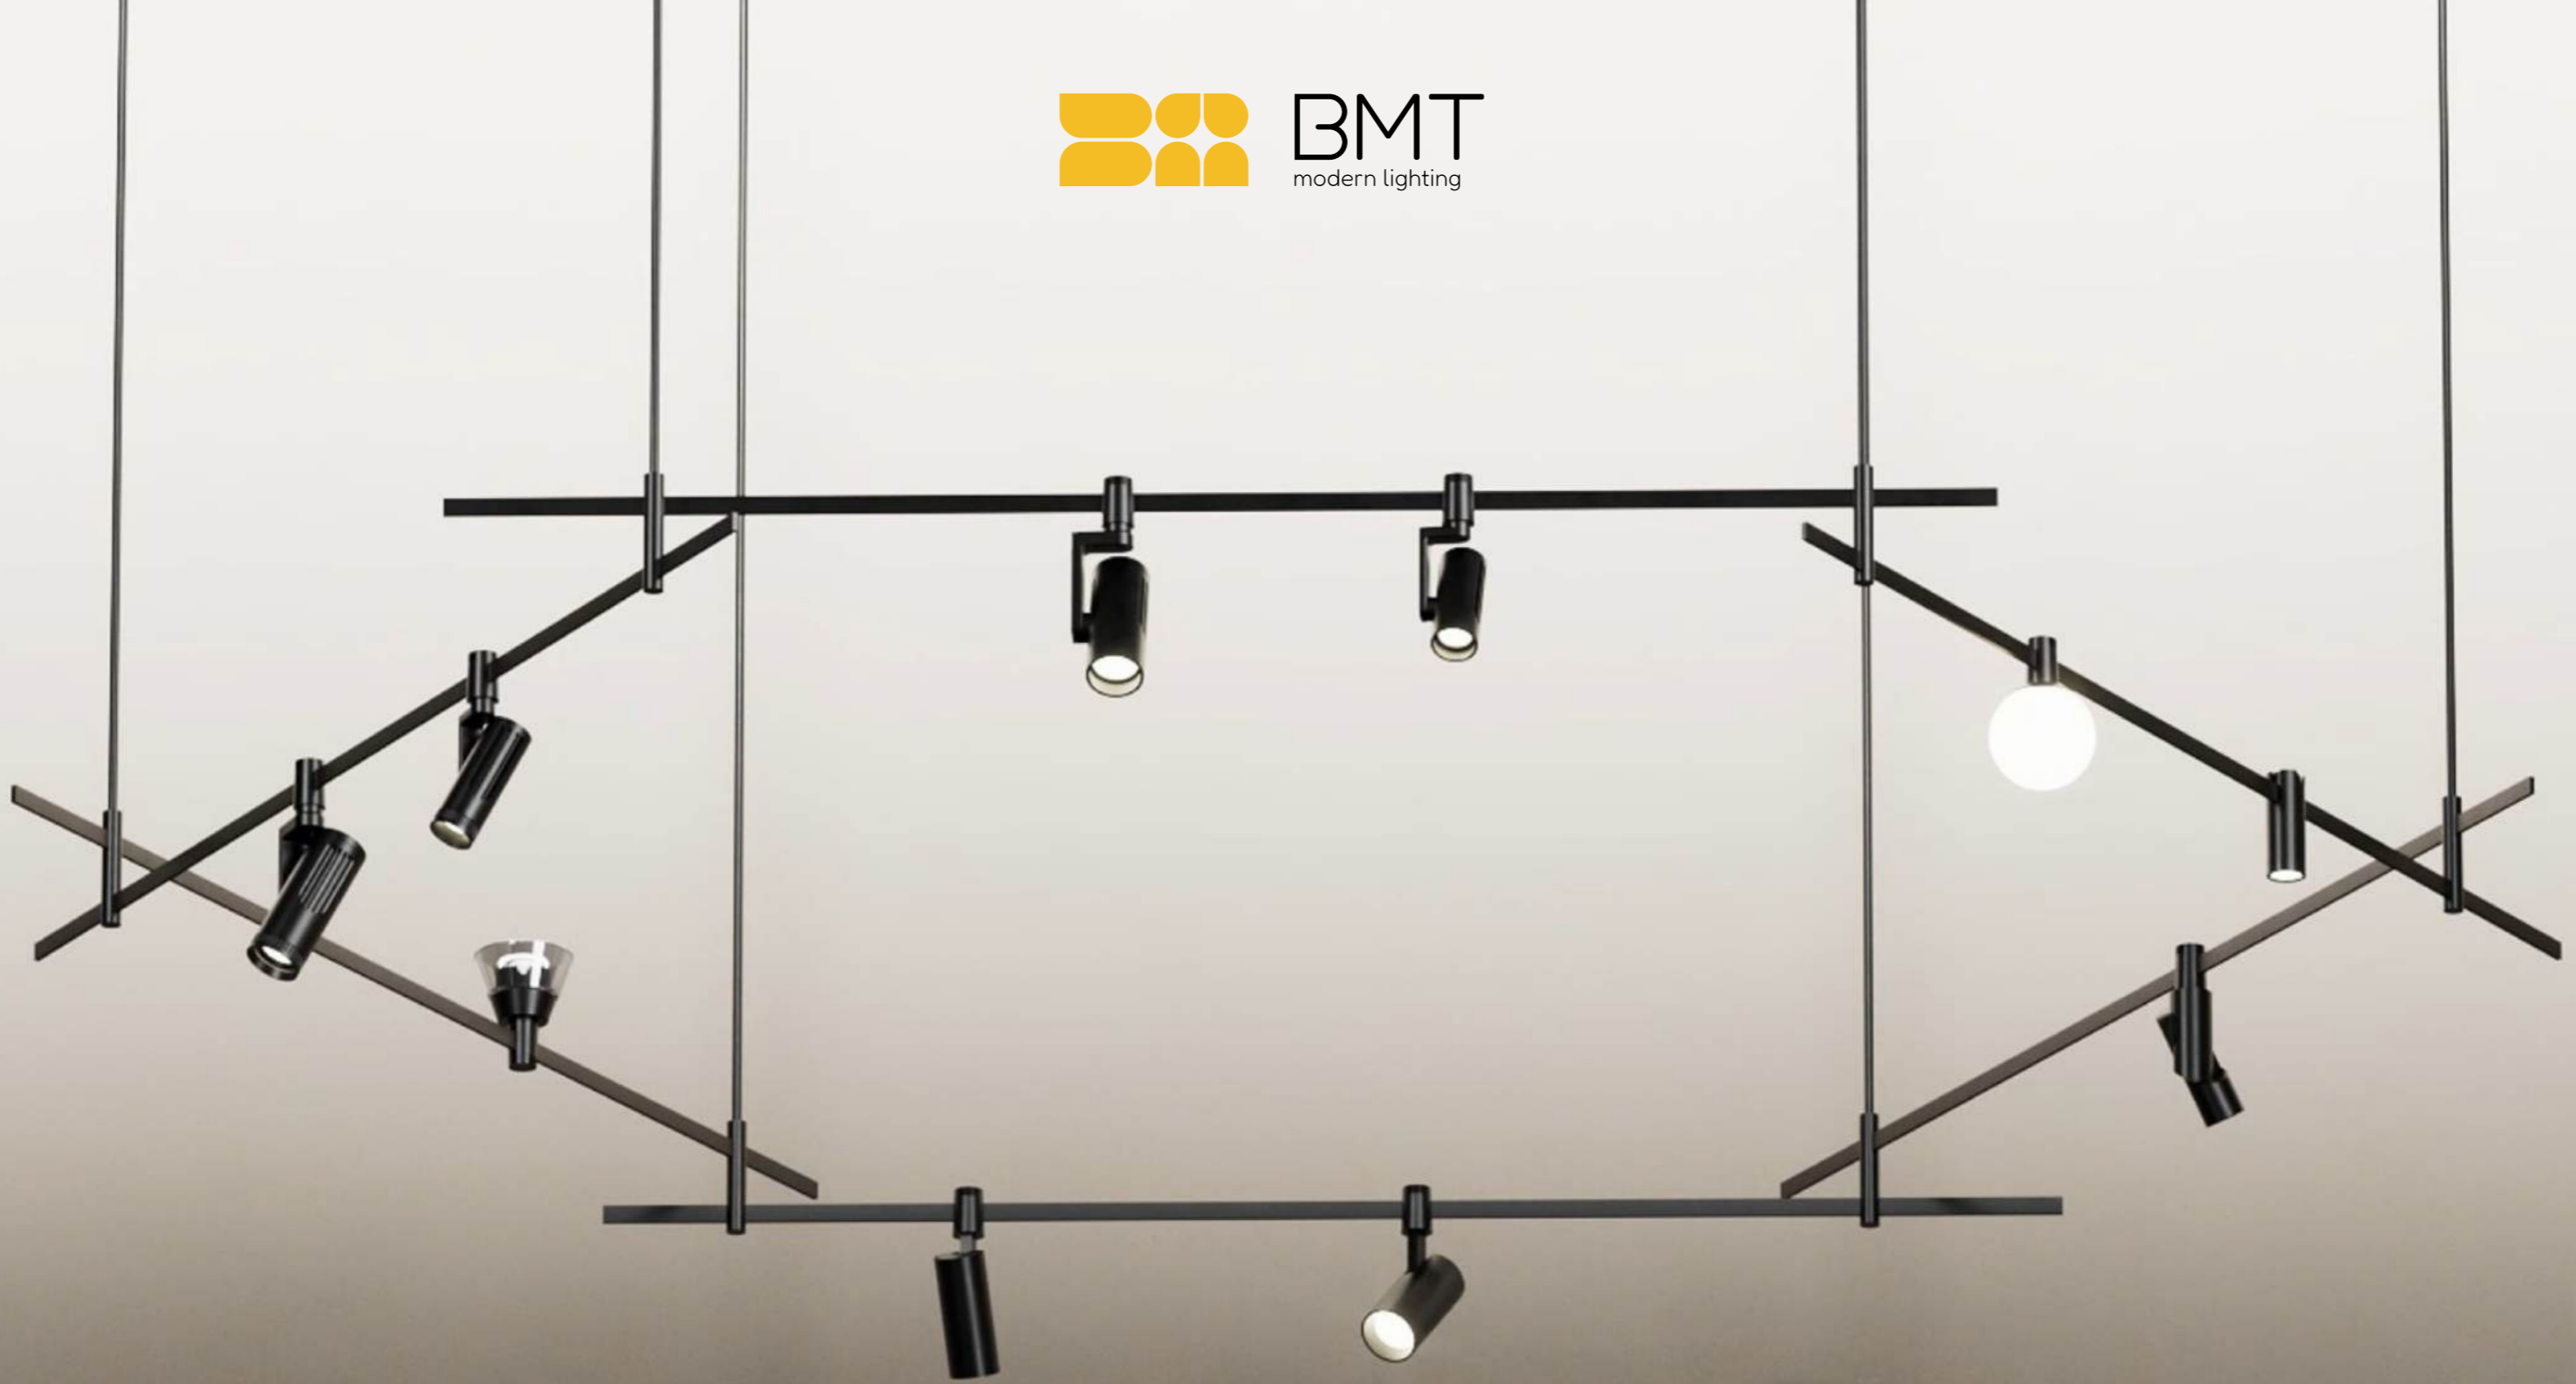


The ideal shape can be formed by splicing the tracks and used in every space

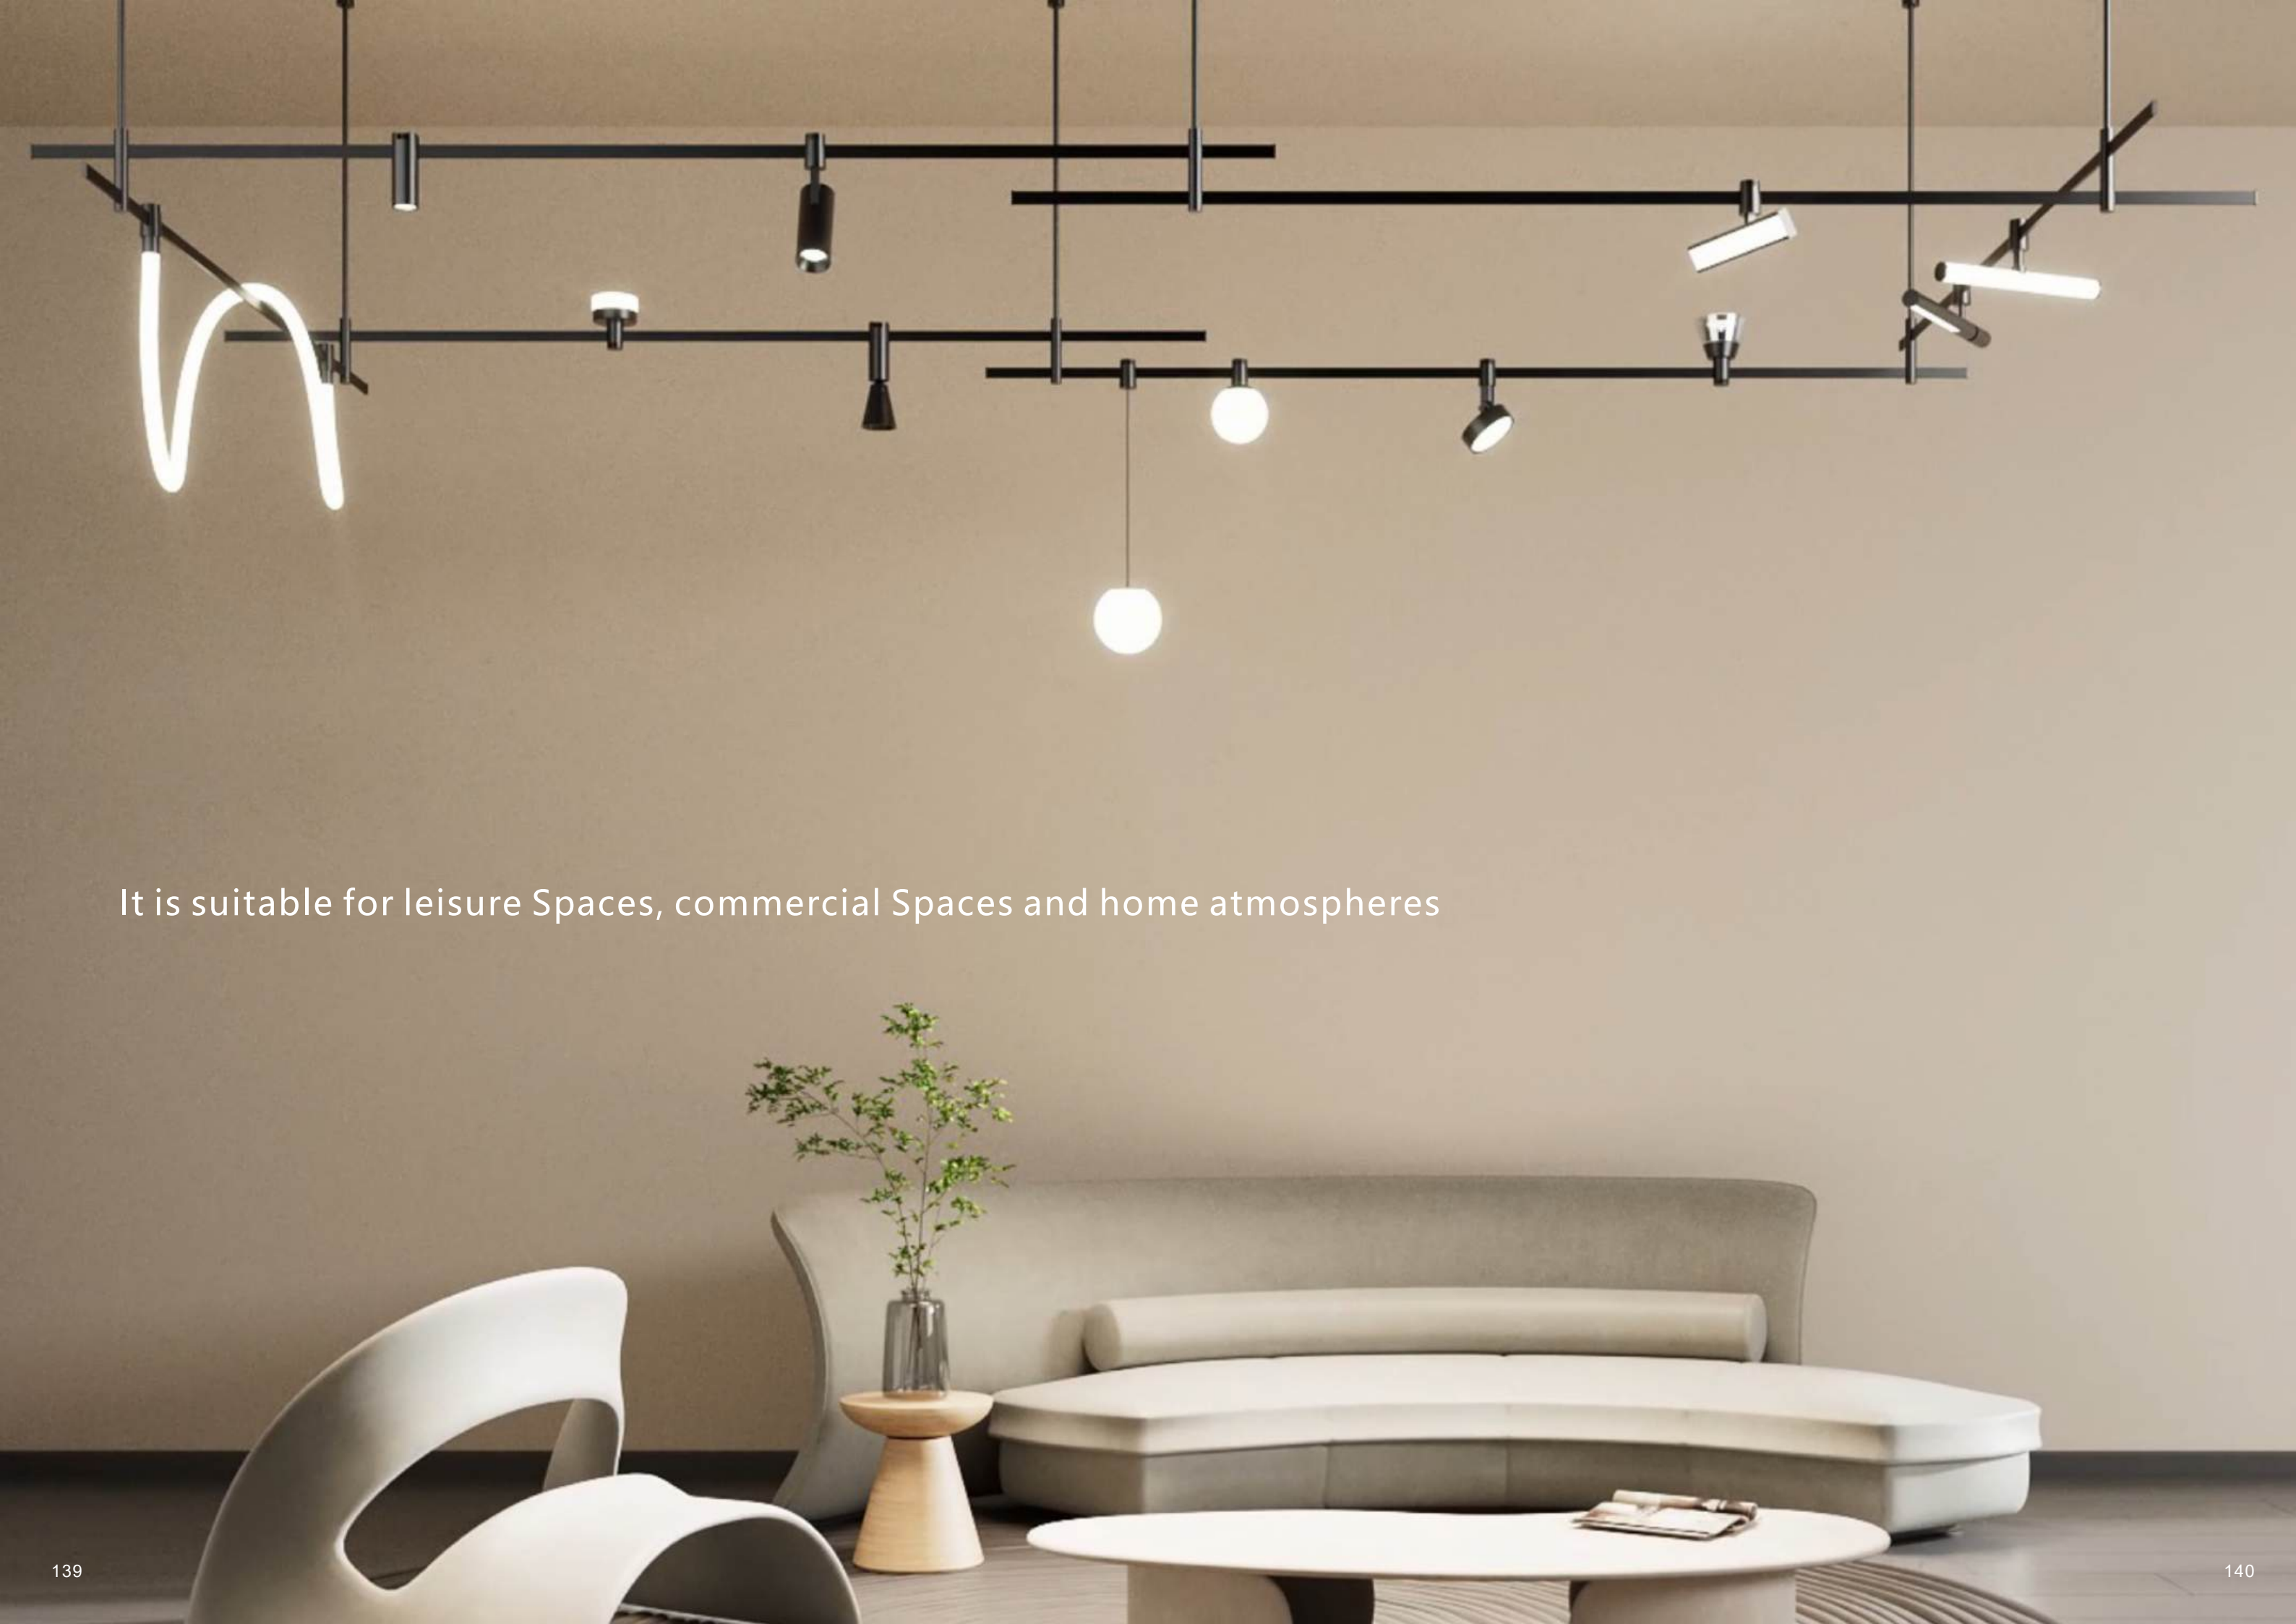

It is suitable for leisure Spaces, commercial Spaces and home atmospheres



Ultra-thin linear track - used in combination
 Choose the installation method you like according to your needs

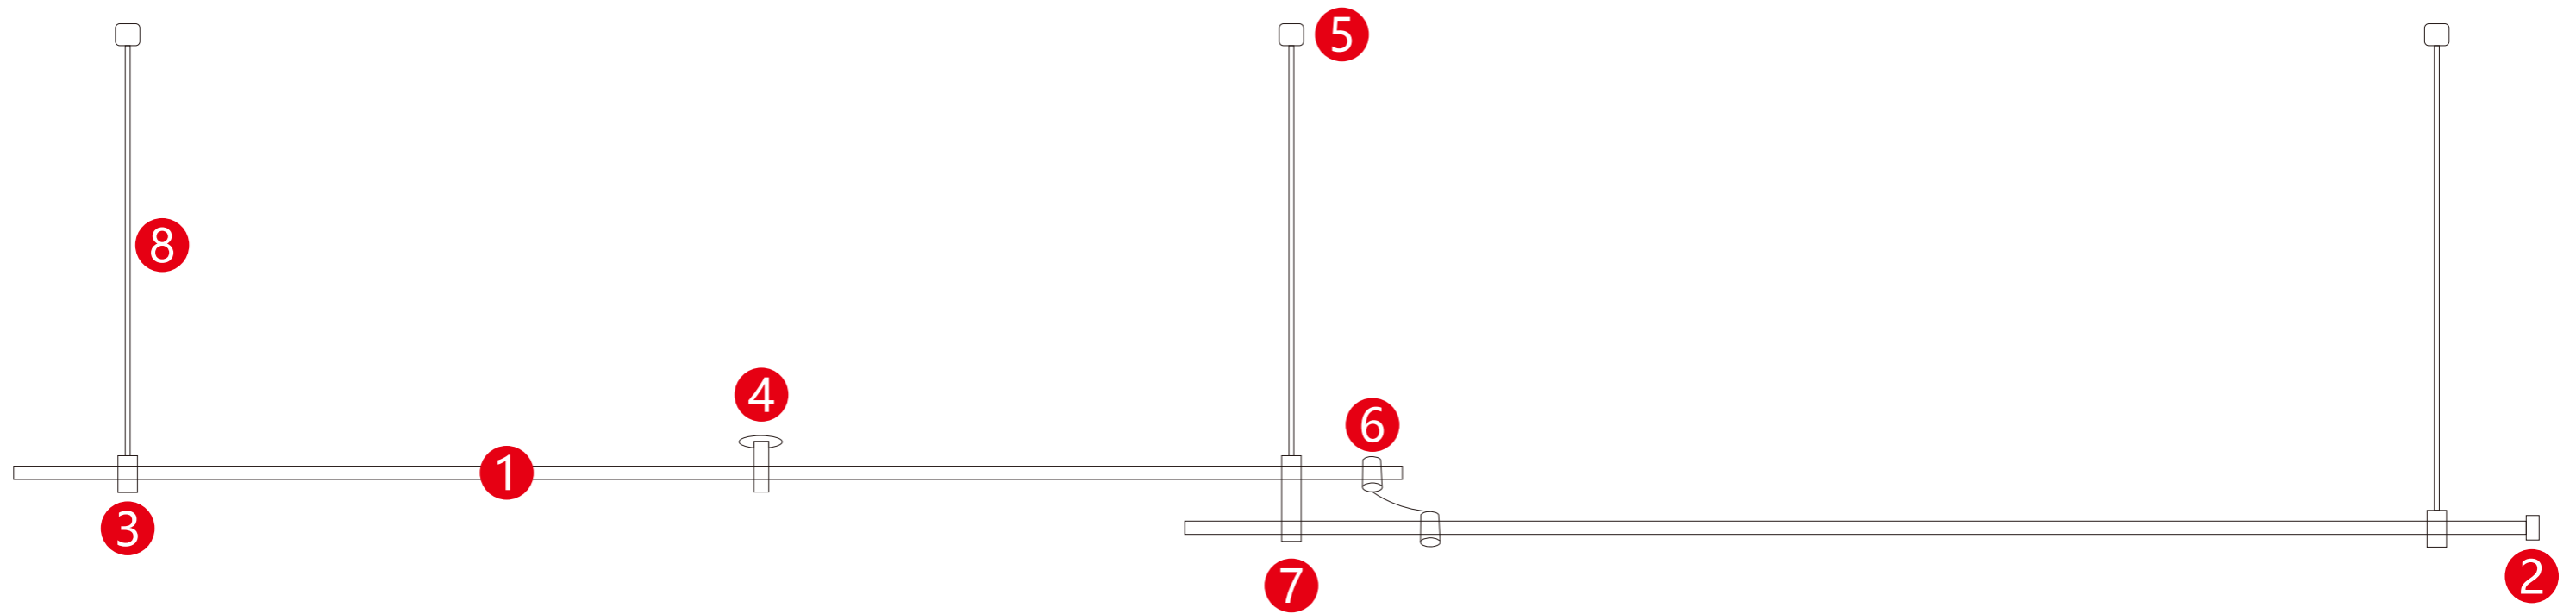

1



Orbit

2



Track plug

3



Input module

4



Integrated power supply

5



Plastic fixation

6



Dual-head input
conductive module

7




Double-layer rotating
hanging wire rod for hardware

8



Hardware extension rod

Linear track accessories

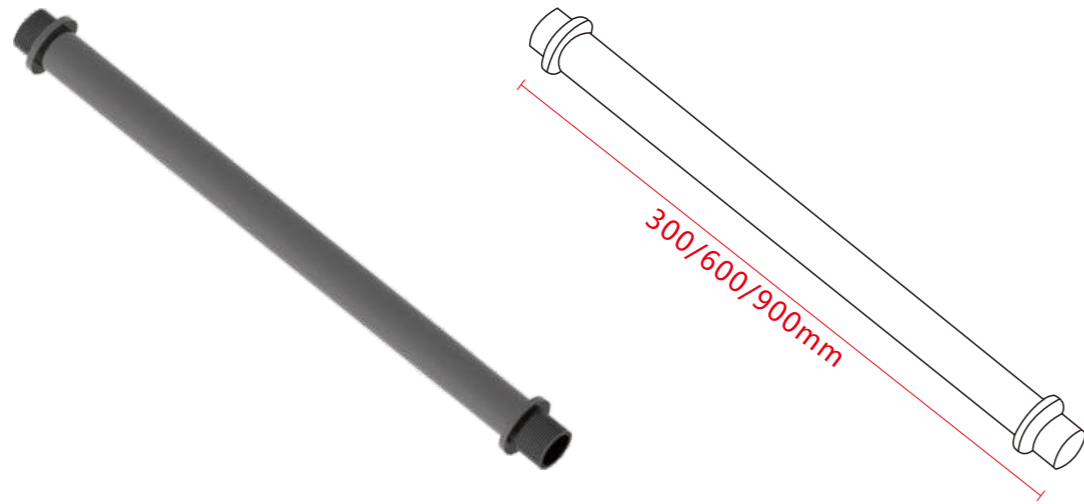

Hardware extension rod

Product Size: 300/600/900mm(The length can be customized.)


Function

1. The hardware extension rods for the ceiling and the track.

Installation steps



Linear track accessories

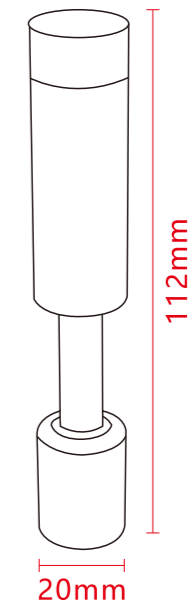

Plastic fixation

Product Size: $\Phi 20 \times H112\text{mm}$


Function

1. Fixed track.

Installation steps



Linear track accessories

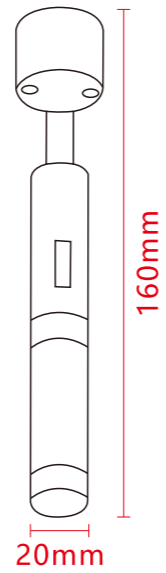

Double layer rotating hanging wire rod for hardware

Product Size: $\Phi 20 \times H160\text{mm}$


Function

1. Track and track splicing upper and lower connecting rods (can be rotated 350°).

Installation steps



Linear track accessories

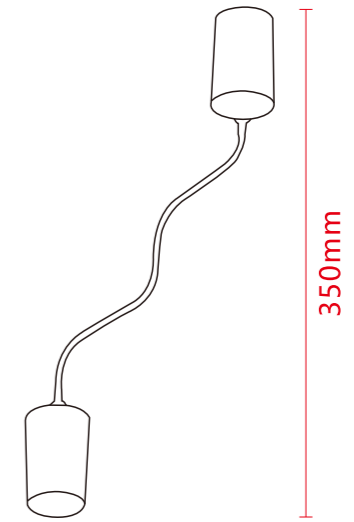

Dual-head input conductive module

Product Size: 350mm

Function

1. Track and track splicing upper and lower conductive connection heads.
2. Rail power supply function.
3. Use in conjunction with a power supply.

Installation steps





Create different shapes with circles to provide a good decoration for the space

Circles of different colors, when decorated in a home, give a distinct feeling



LOUNGE

POWOER ROOM
COWTROL ROOM



Circles meeting circles is a good idea





Ultra-thin circular linear track - used in combination
 Choose the installation method you like according to your needs

1



Orbit

2




Circular conductive hanging wire accessories


3



Circular hardware hanging wire accessories

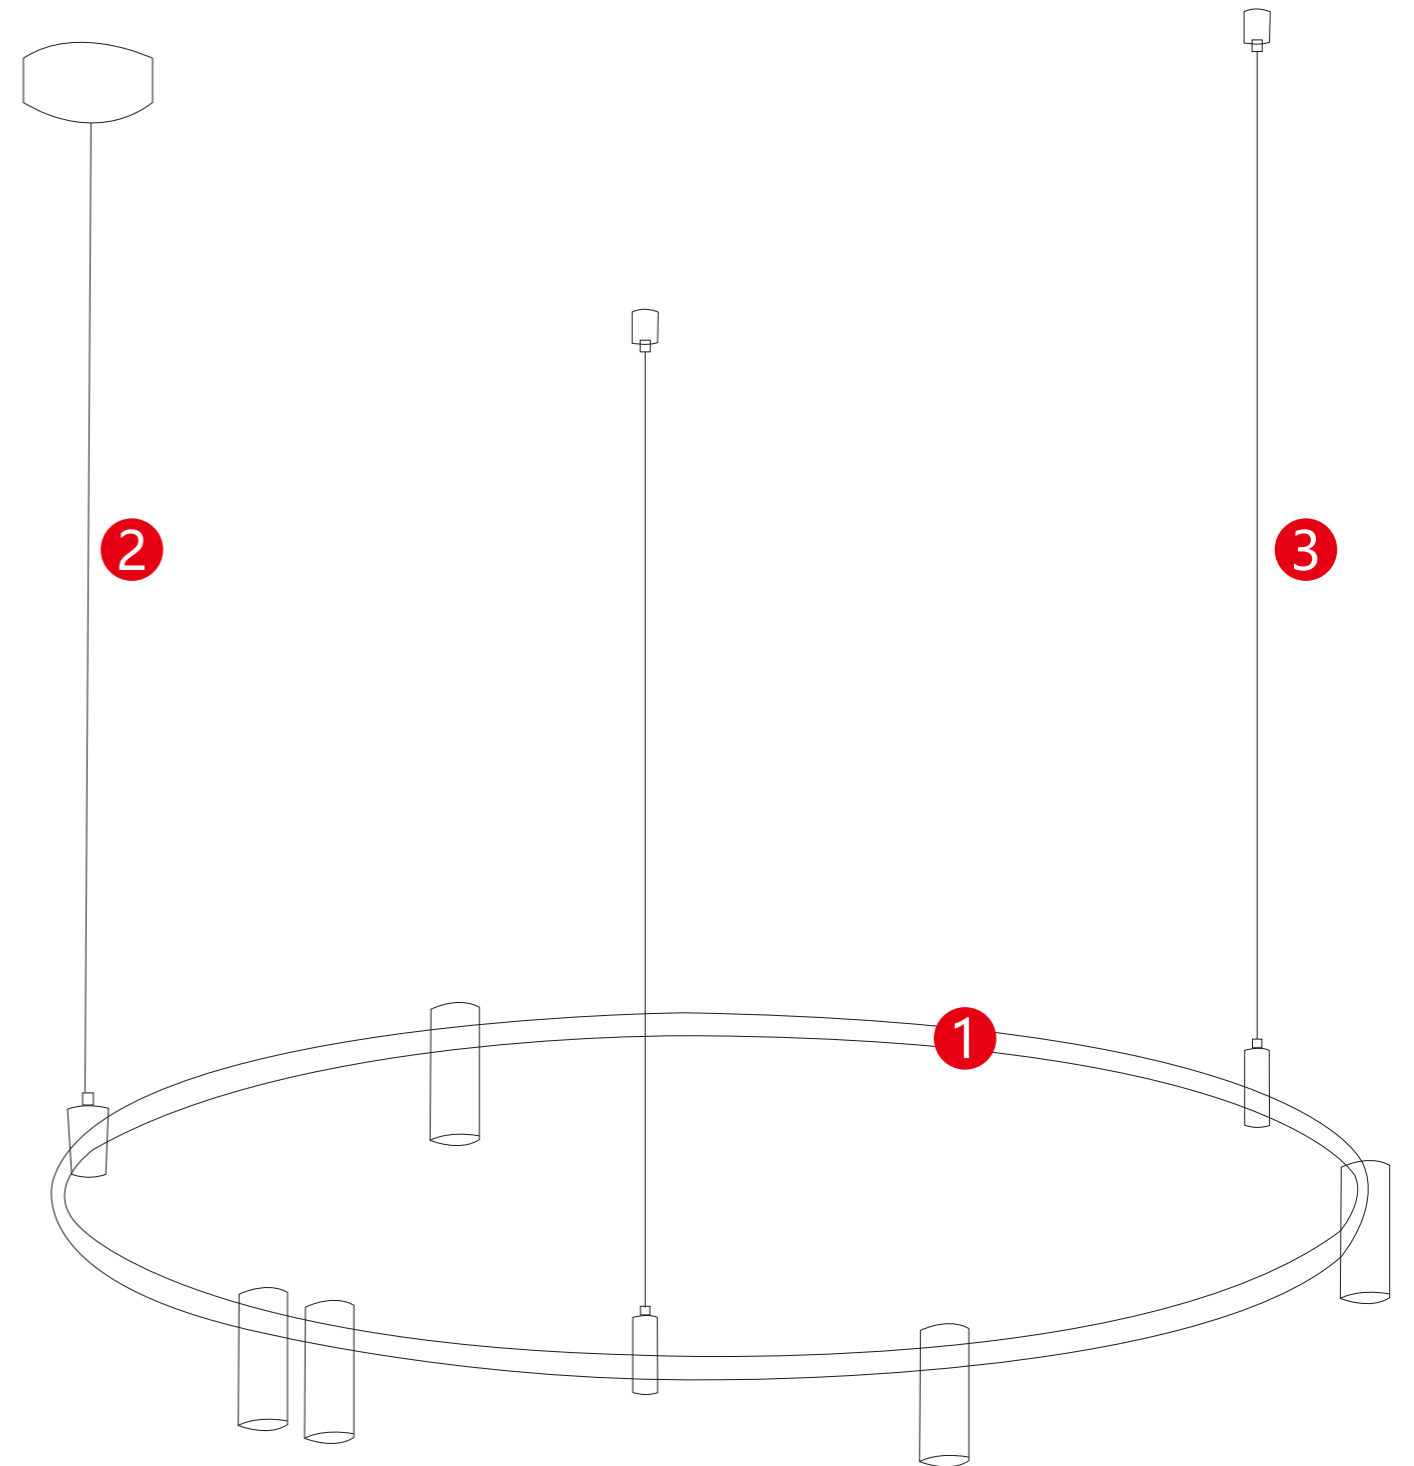

Circular aluminum track

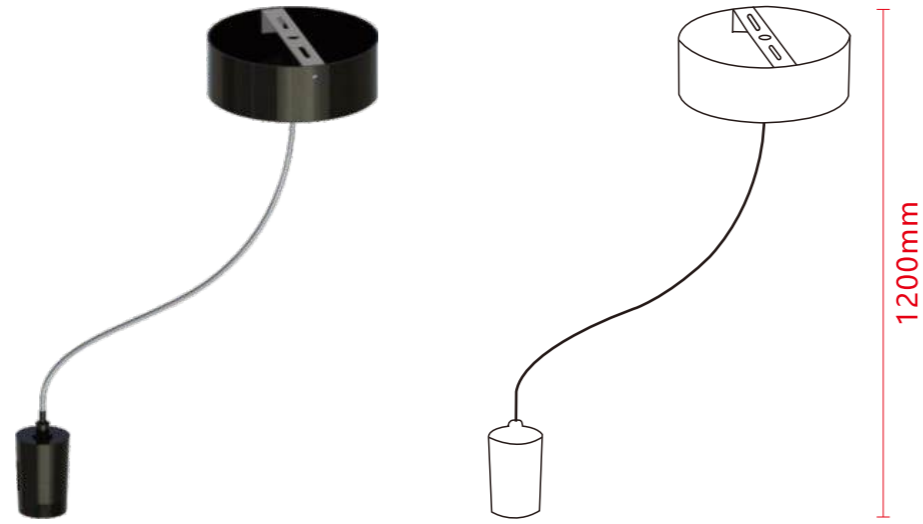

Circular conductive hanging wire accessories

Product Size: 1200mm Hanging line


Function

1. Circular conductive hanging wire ceiling panel.
2. Rail power supply function.
3. Use in conjunction with a power supply.

Installation steps



Circular aluminum track

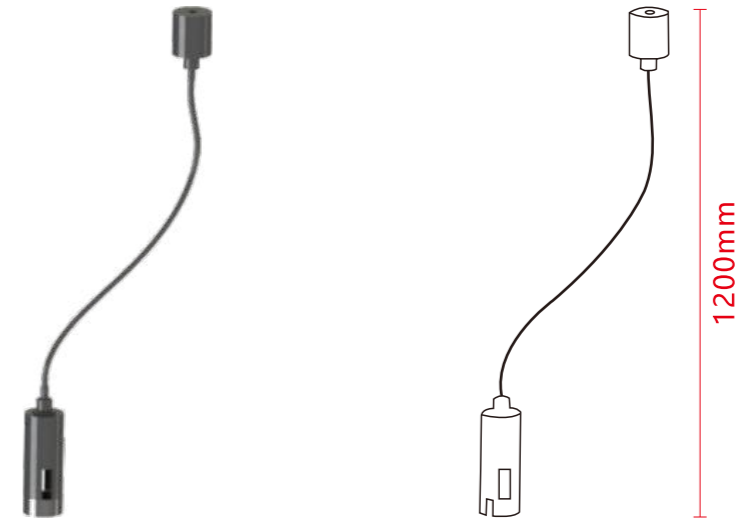


Circular hardware hanging wire accessories

Product Size: 1200mm Hanging line


Function

1. Circular hanging line.

Installation steps

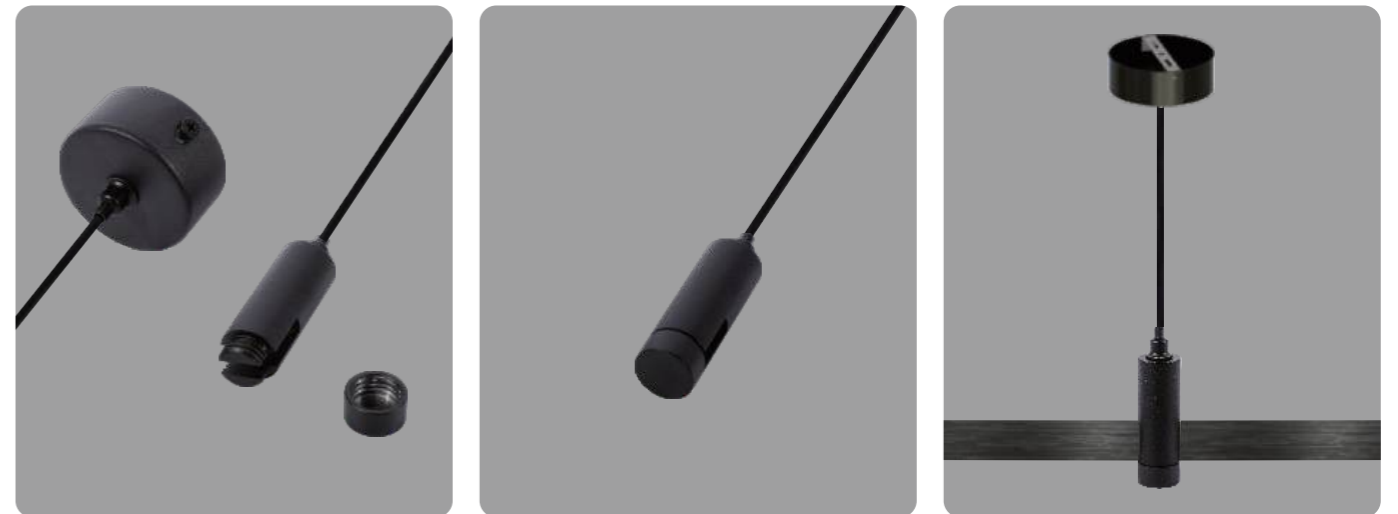

Power supply product specification sheet

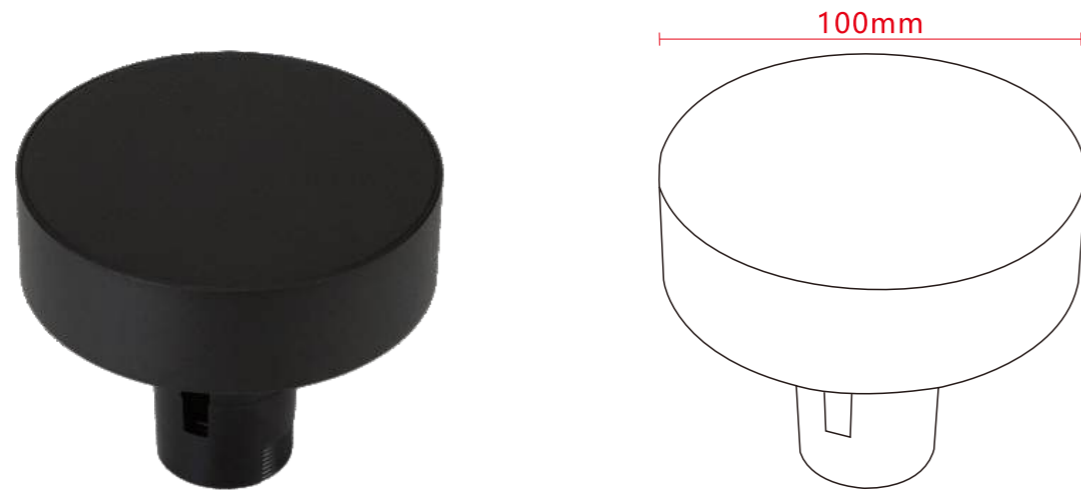

Semi-flexible integrated power supply

100/200W

Light source model
/

Power
100W/200W

Size
100mm

Diffuser
PC

Luminous Angle
/

Color temperature
/

Diffuser
48V


Luminous Angle
PC / Aluminum

Colour
Black


Protection grade
IP20

Operating ambient temperature
-20°C~40°C

Installation steps

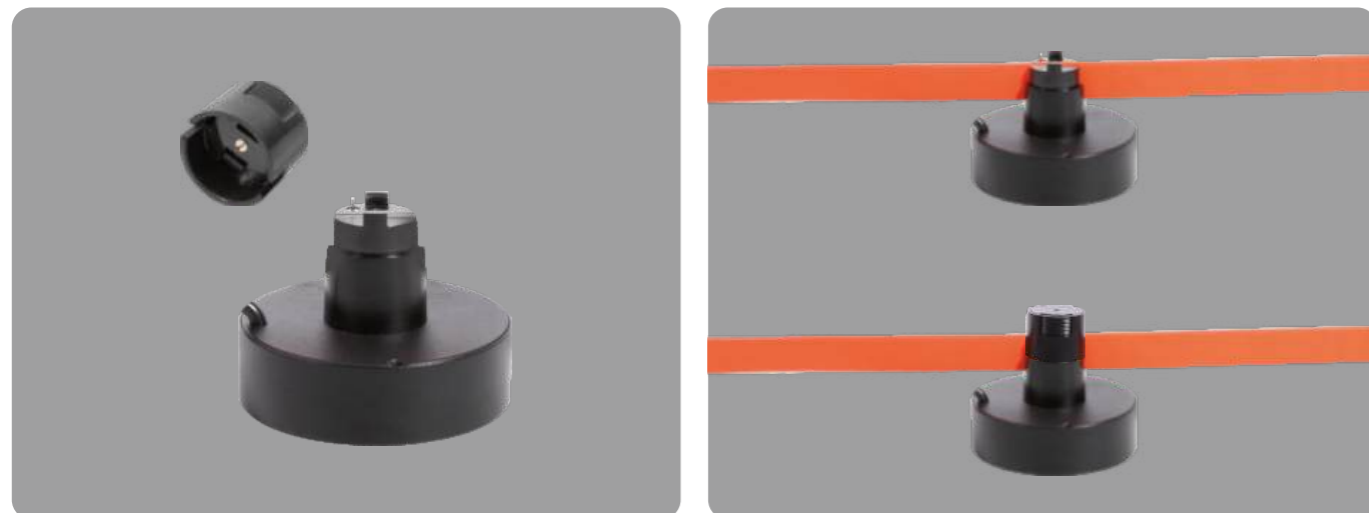

Power supply product specification sheet

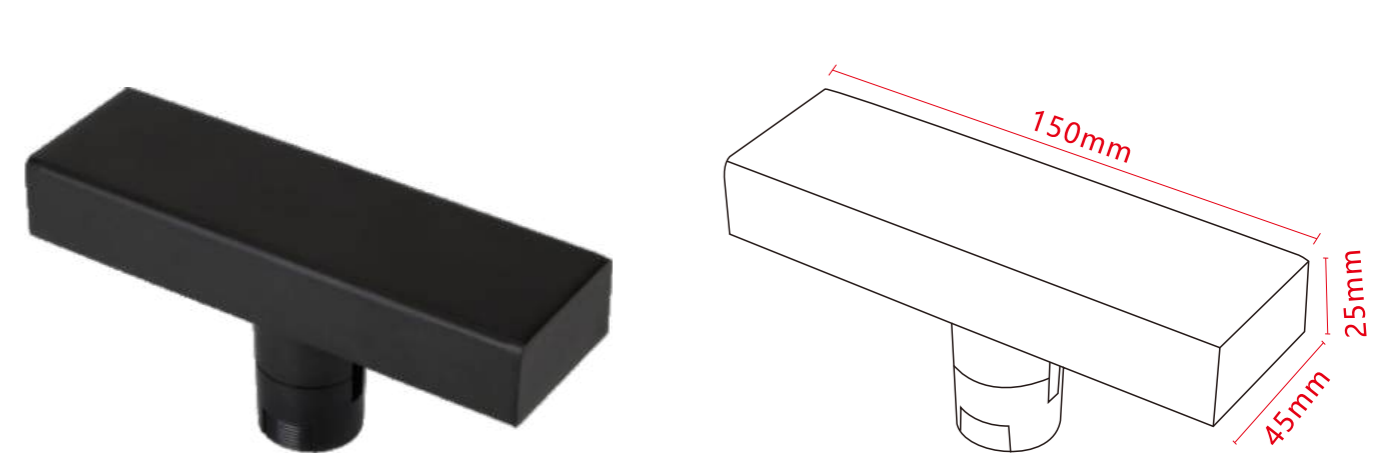

Semi-flexible intelligent integrated power supply

100/200W

Light source model
/

Power
100W/200W

Size
45*25*150mm

Diffuser
PC

Luminous Angle
/

Color temperature
/

Diffuser
48V


Luminous Angle
PC / Aluminum

Colour
Black


Protection grade
IP20

Operating ambient temperature
-20°C~40°C

Installation steps

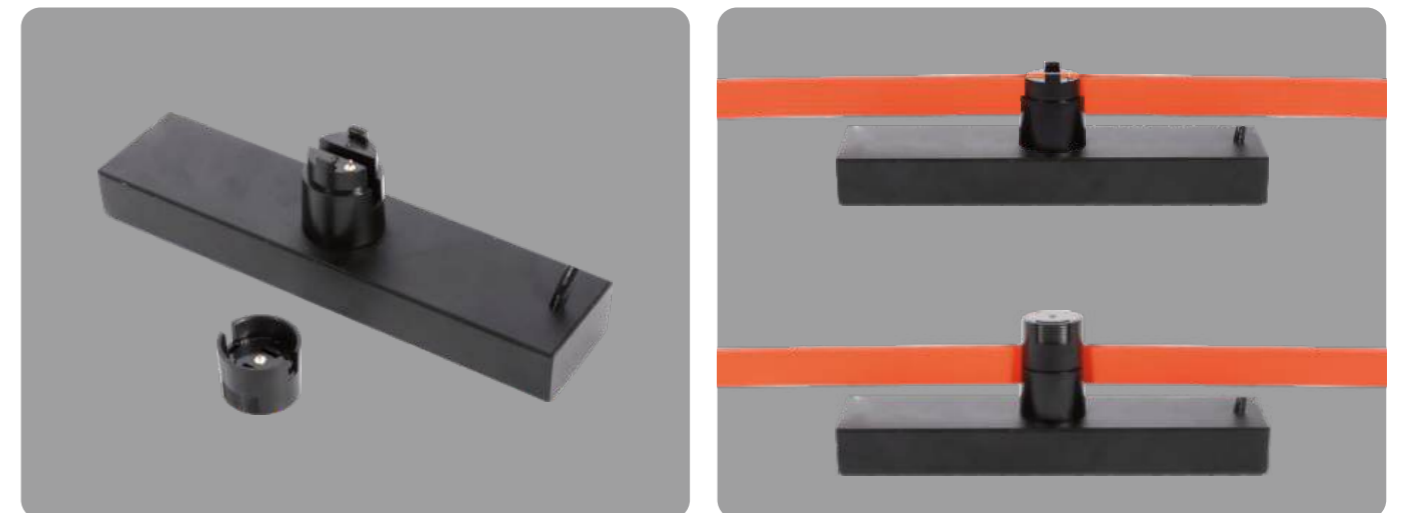

Specification sheet of Lighting products

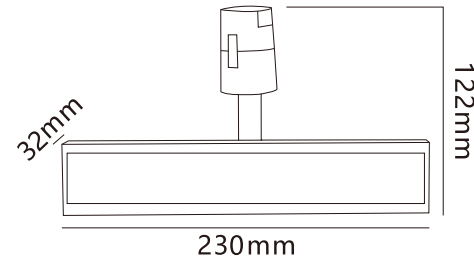


Semi-soft floodlight

Power 10W Luminous Angle 120°

Size 230*32*122mm



The lamp body can rotate

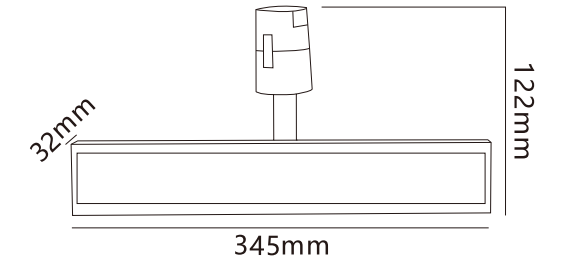


Semi-soft floodlight

Power 18W Luminous Angle 120°

Size 345*32*122mm



The color of the track shell/track strip can be freely changed

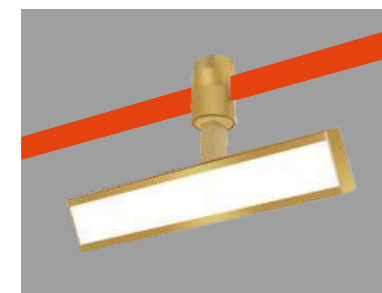

Voltage: DC48V



Colour: Black/White/Gold



CRI: ≥90




Material: Aluminum +PC




No flicker: < 3%



Optics: PC module

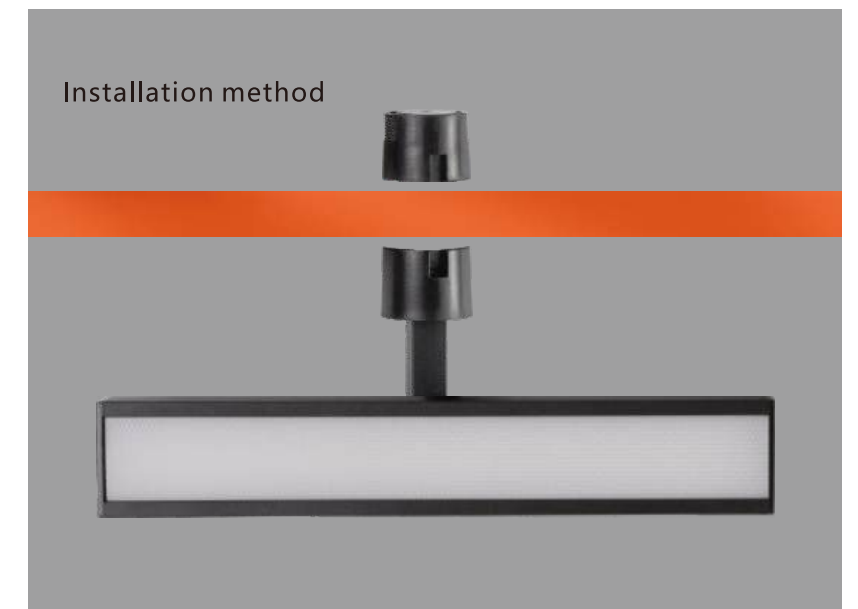

Specification sheet of Lighting products

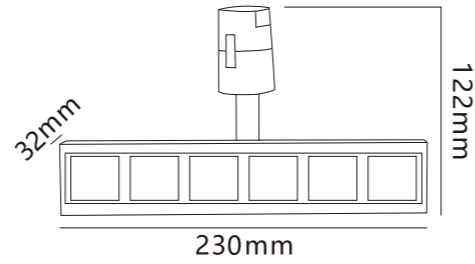


Folding grille lamp

Power 10W Luminous Angle 24°

Size 230*32*122mm



The lamp body can rotate

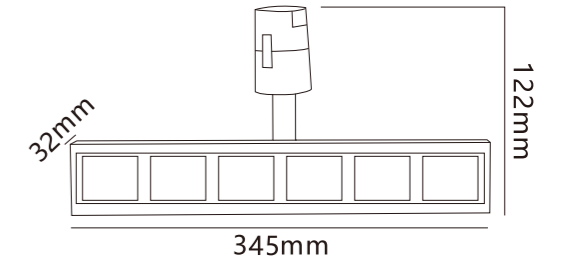



Folding grille lamp

Power 15W Luminous Angle 24°

Size 345*32*122mm



The color of the track shell/track strip can be freely changed

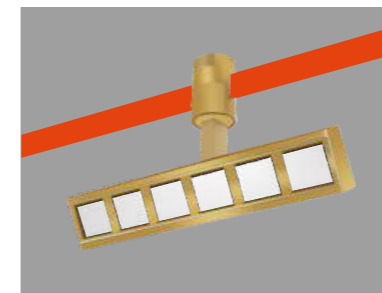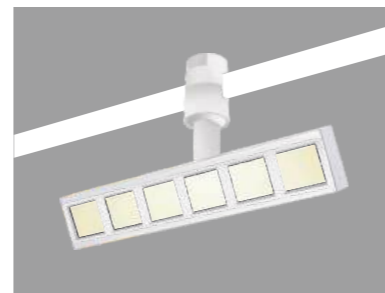

Voltage: DC48V



Colour: Black/White/Gold



CRI: ≥90




Material: Aluminum +PC





No flicker: < 3%



Optics: Lens

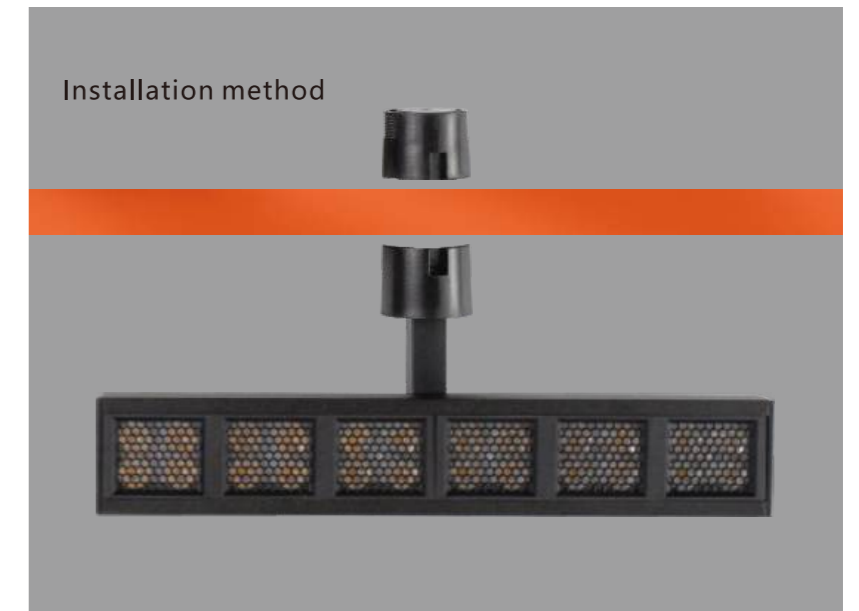

Specification sheet of Lighting products

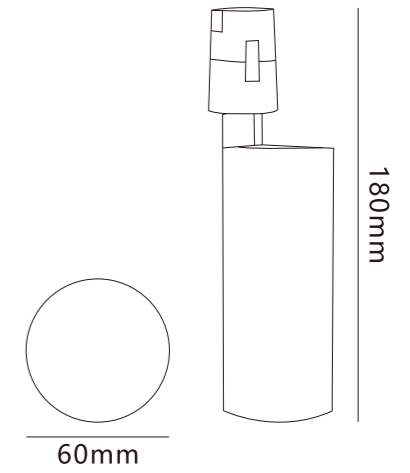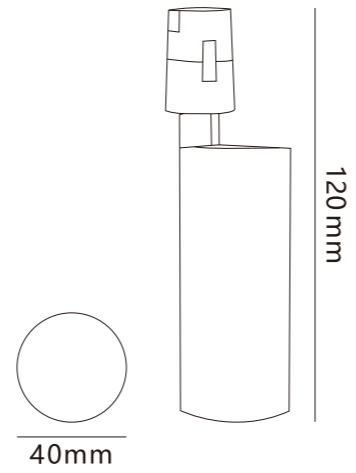

Semi soft spotlights

Power 9W Luminous Angle 24°

Size 40*120 mm



The lamp body can rotate



Semi-soft spotlights

Power 15W Luminous Angle 24°

Size 60*180mm



The color of the track shell/track strip can be freely changed



Voltage: DC48V



Colour: Black/White/Gold



CRI: ≥90



Material: Aluminum +PC



No flicker: < 3%




Optics: Lens




Specification sheet of Lighting products

The lamp body can rotate



45mm




115mm

Spotlight B


Power 10W Luminous Angle 24° Size 45*115mm

ON-OFF

CCT 3000-6000K



55mm




135mm

Spotlight B


Power 20W Luminous Angle 24° Size 55*135mm

ON-OFF

CCT 3000-6000K



65mm



135mm

Spotlight B

Power 30W Luminous Angle 24° Size 65*135mm

ON-OFF

CCT 3000-6000K

The color of the track shell/track strip can be freely changed



Voltage: DC48V



Colour: Black/White/Gold



CRI: ≥90



Material: Aluminum +PC




No flicker: < 3%



Optics: Lens



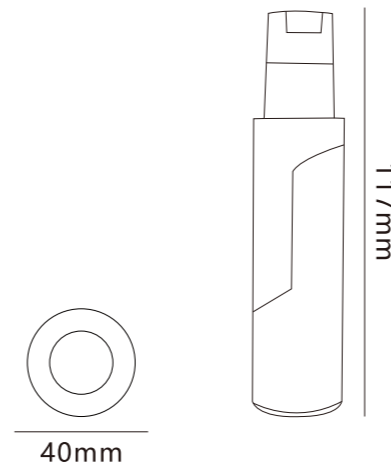

Spotlight B

Power
7W

Luminous Angle
24°


Size
40*117mm



The lamp body can rotate



The color of the track shell/track strip can be freely changed

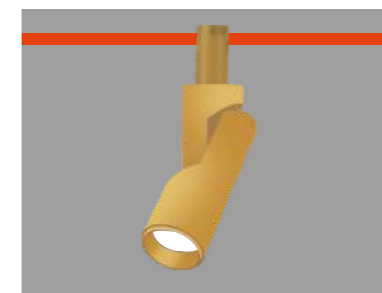

Voltage: DC48V



CRI: ≥90



Colour: Black/White/Gold



Material: Aluminum +PC





No flicker: < 3%



Optics: Lens



Specification sheet of Lighting products

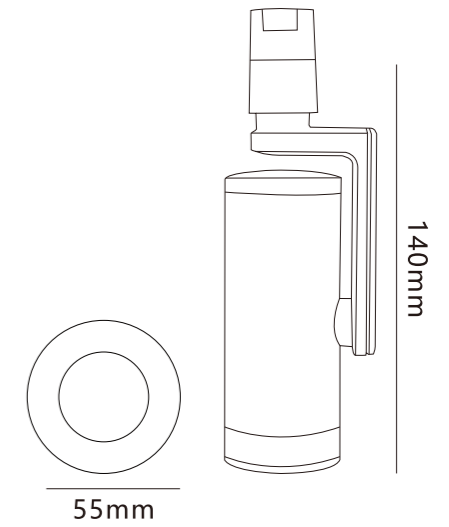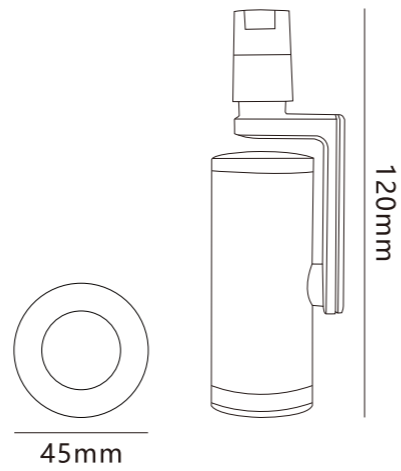

Focus folding spotlights

Power 10W Luminous Angle 15°-55°

Size 45*120mm



Focus folding spotlights

Power 20W Luminous Angle 15°-55°

Size 55*140mm



The lamp body can rotate



The color of the track shell/track strip can be freely changed



Voltage: DC48V



CRI: ≥90



Colour: Black/White/Gold



Material: Aluminum +PC




No flicker: < 3%



Optics: Lens



Specification sheet of Lighting products

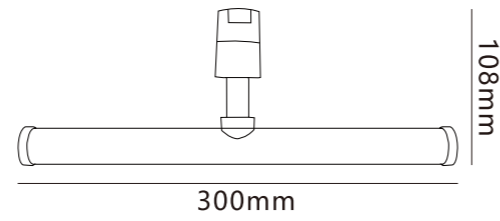


Size
300*108mm

Semi-flexible D25 floodlight

Power 10W Luminous Angle 280°



The lamp body can rotate

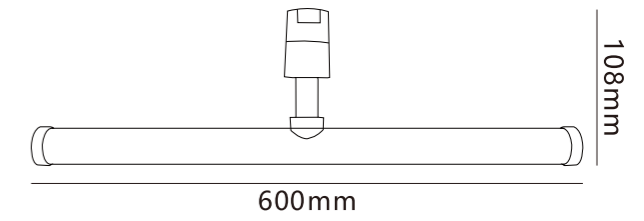



Size
600*108mm

Semi-flexible D25 floodlight

Power 20W Luminous Angle 280°



The color of the track shell/track strip can be freely changed

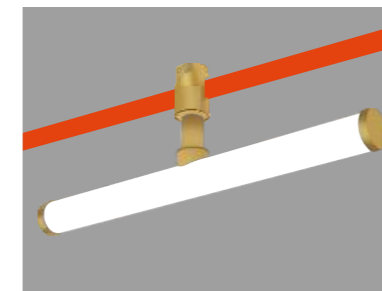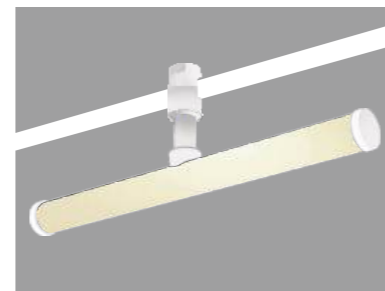

Voltage: DC48V



Colour: Black/White/Gold



CRI: ≥90




Material: Aluminum +PC




No flicker: < 3%



Optics: PC module

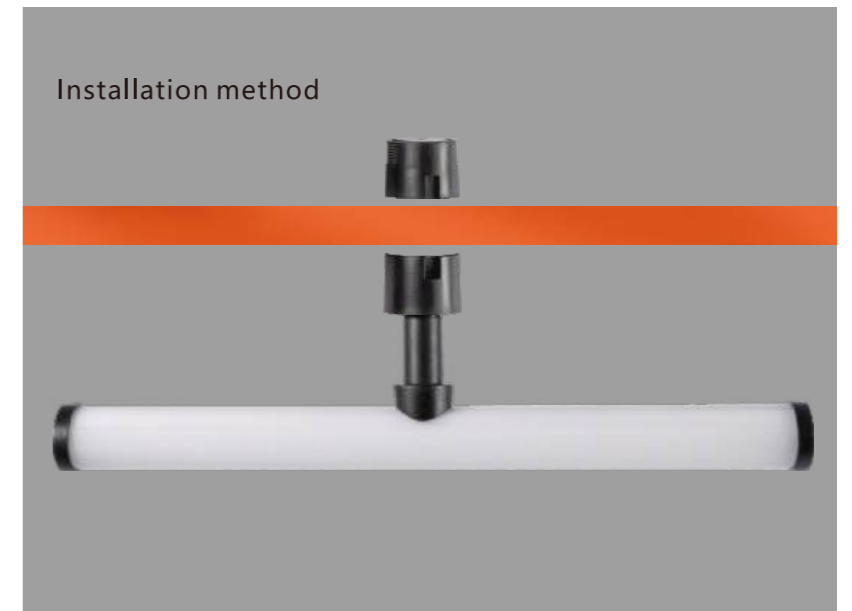

Specification sheet of Lighting products

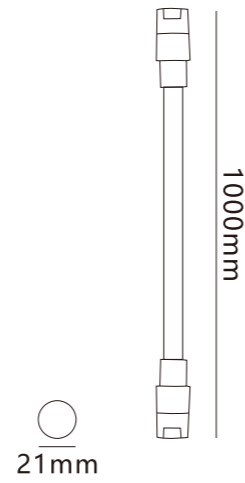

Semi-flexible silicone light strips



Power
10W

Luminous Angle
360°

Size
1000*21mm



The lamp body can rotate

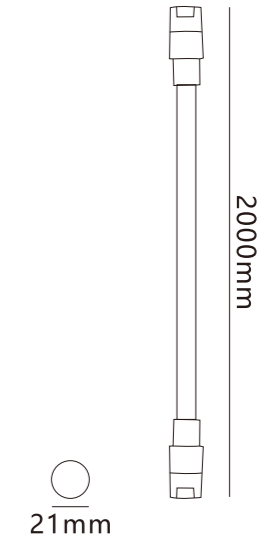

Semi-flexible silicone light strips




Power
20W

Luminous Angle
360°

Size
2000*21mm



The color of the track shell/track strip can be freely changed

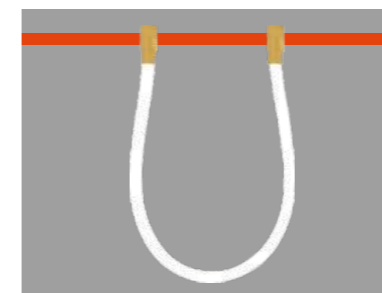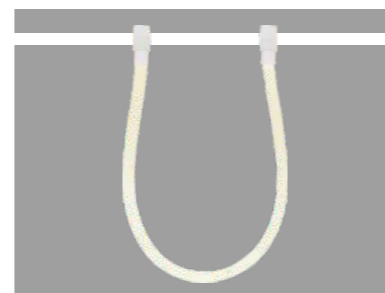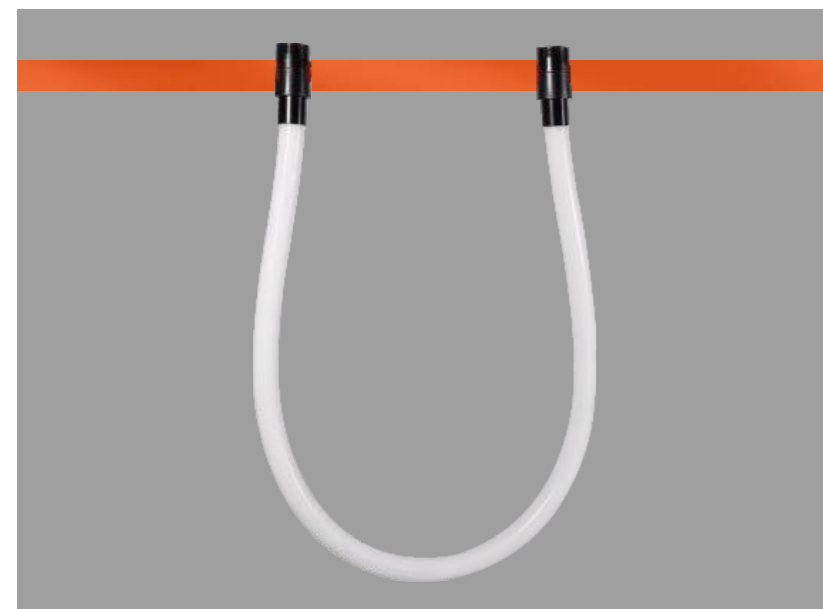

Voltage: DC48V



CRI: ≥90



Colour: Black/White/Gold




Material: Aluminum +PC




No flicker: < 3%



Optics: PC module

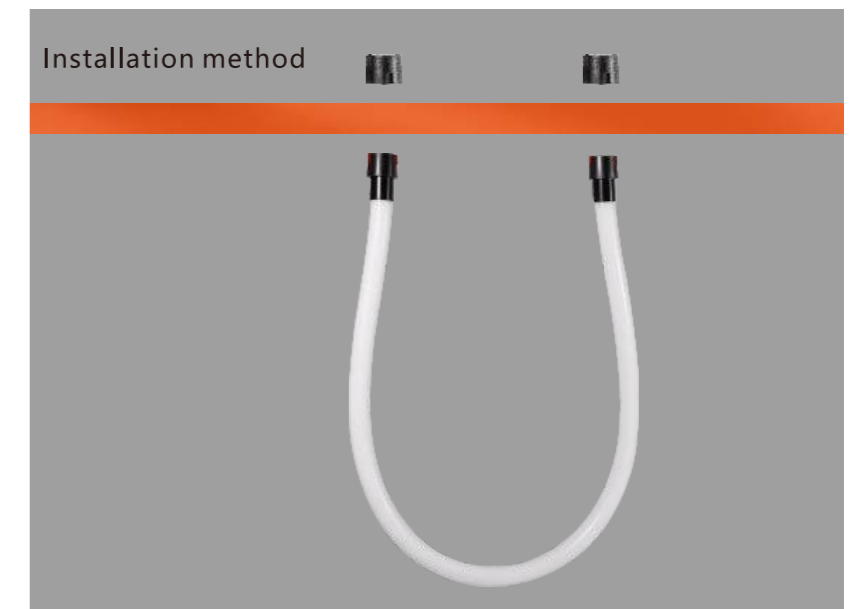

Specification sheet of Lighting products

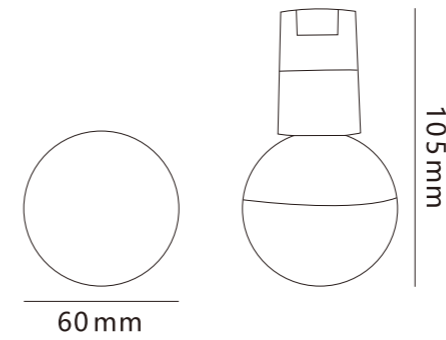

Semi soft small ball



Power
7W

Luminous Angle
180°

Size
105*60mm



The color of the track shell/track strip can be freely changed

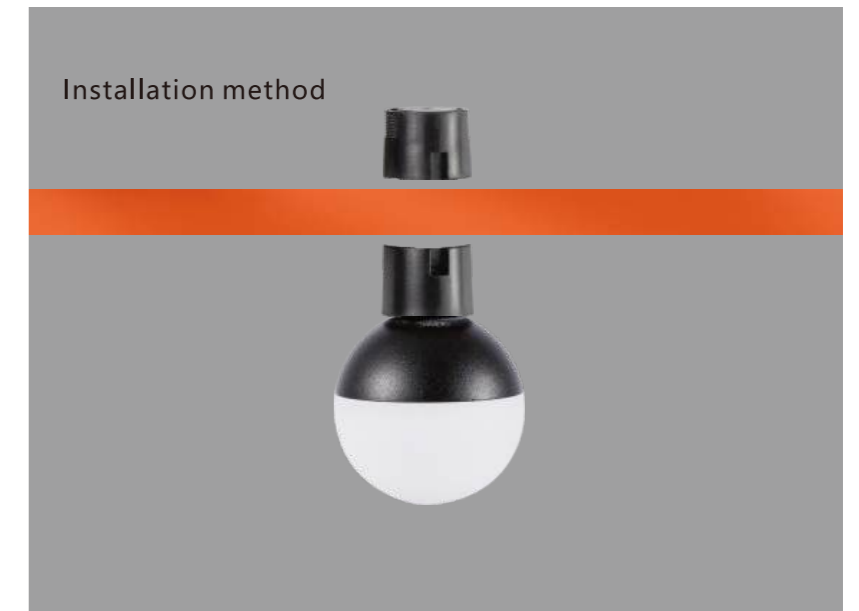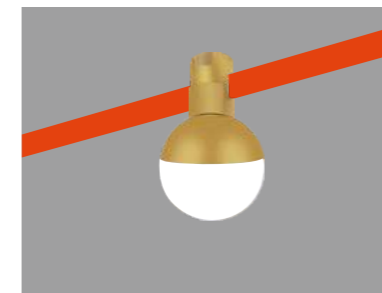

Voltage: DC48V



CRI: ≥90



Colour: Black/White/Gold



Material: Aluminum +PC




No flicker: < 3%



Optics: PC module

Specification sheet of Lighting products

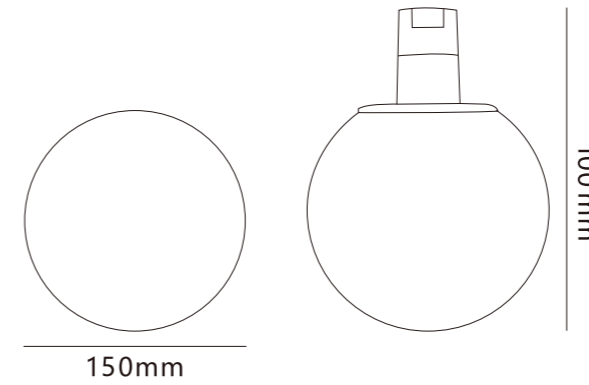

Semi flexible bulb lamp


Power
7W

Luminous Angle
180°

Size
150*100 mm



The color of the track shell/track strip can be freely changed

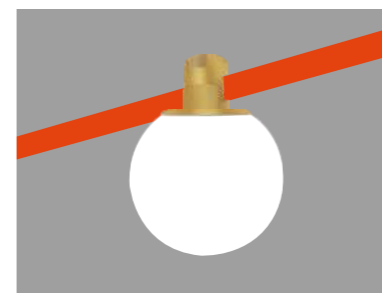

Voltage: DC48V



CRI: ≥90



Colour: Black/White/Gold



Material: Aluminum +PC




No flicker: < 3%



Optics: PC module

Specification sheet of Lighting products



Spherical hanging line lamp

Power
7W


Luminous Angle
105°

Size
120mm

ON-OFF

CCT | 3000-6000K

The color of the track shell/track strip can be freely changed

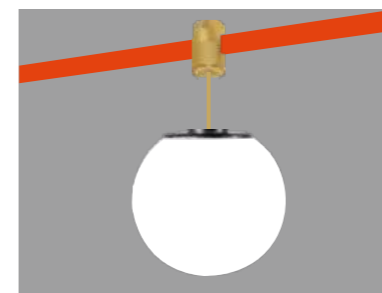

Voltage: DC48V



CRI: ≥90



Colour: Black/White/Gold



Material: Aluminum +PC




No flicker: < 3%



Optics: PC module

Specification sheet of Lighting products

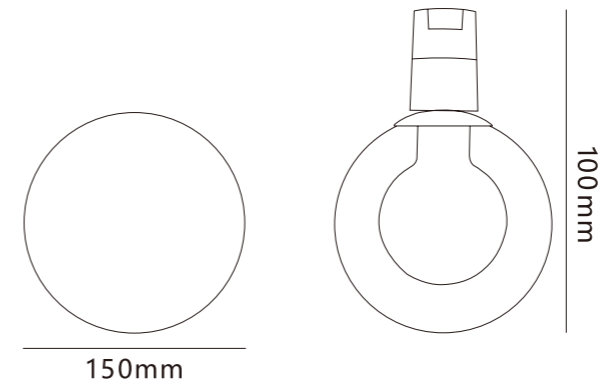

A ball within a ball


Power
5W

Luminous Angle
180°

Size
150*100mm



The color of the track shell/track strip can be freely changed

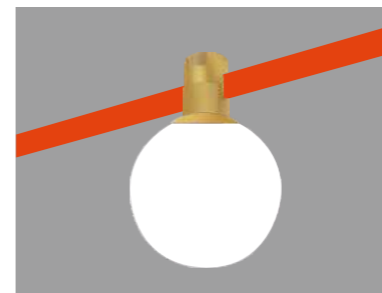

Voltage: DC48V



CRI: ≥90



Colour: Black/White/Gold



Material: Aluminum +PC




No flicker: < 3%



Optics: PC module

Specification sheet of Lighting products

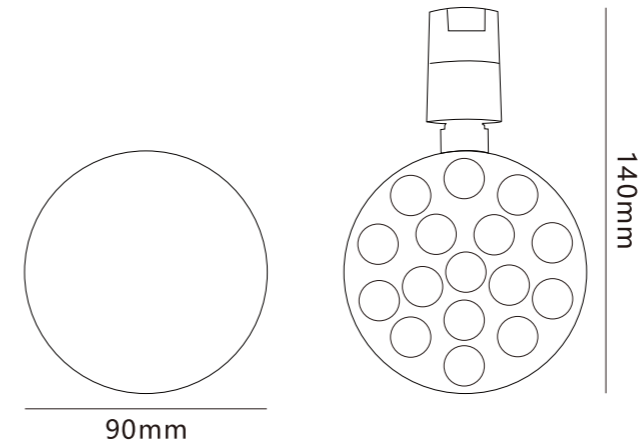

Semi-flexible disc grille lamp

Power
10W

Luminous Angle
24°



Size
140*90mm



The lamp body can rotate



The color of the track shell/track strip can be freely changed

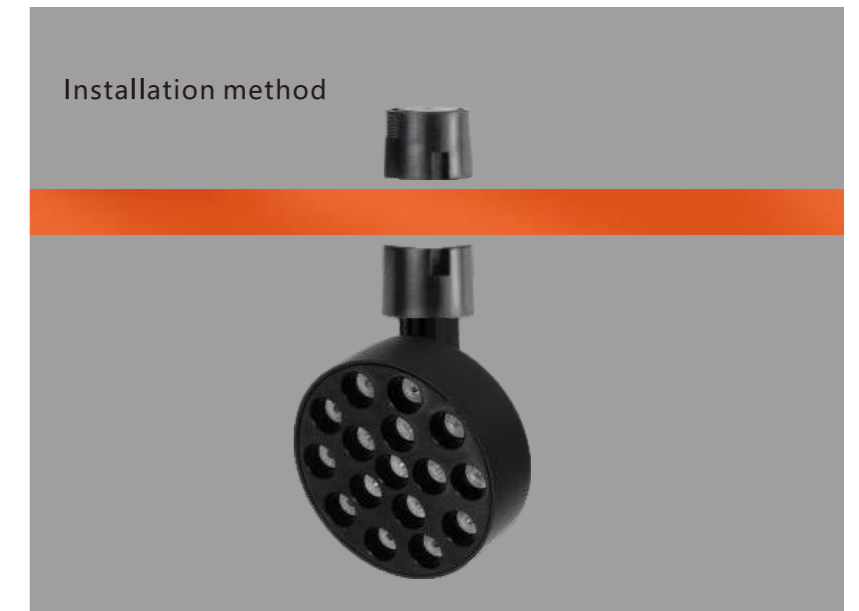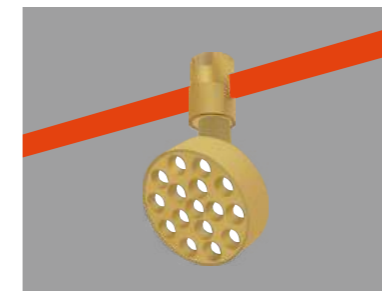

Voltage: DC48V



CRI: ≥90



Colour: Black/White/Gold




Material: Aluminum +PC



No flicker: < 3%



Optics: Lens

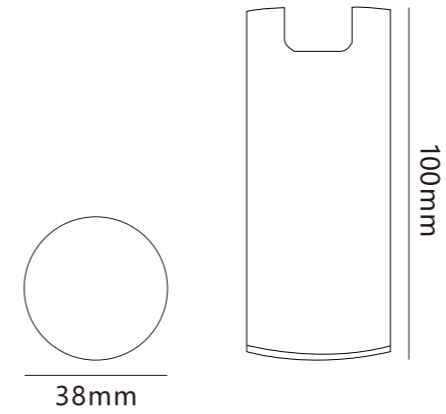

Semi-flexible tube spotlights


Power
7W

Luminous Angle
24°

Size
38*100mm



The color of the track shell/track strip can be freely changed

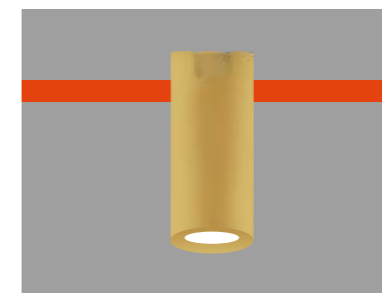

Voltage: DC48V



CRI: ≥90



Colour: Black/White/Gold




Material: Aluminum +PC



No flicker: < 3%



Optics: Lens

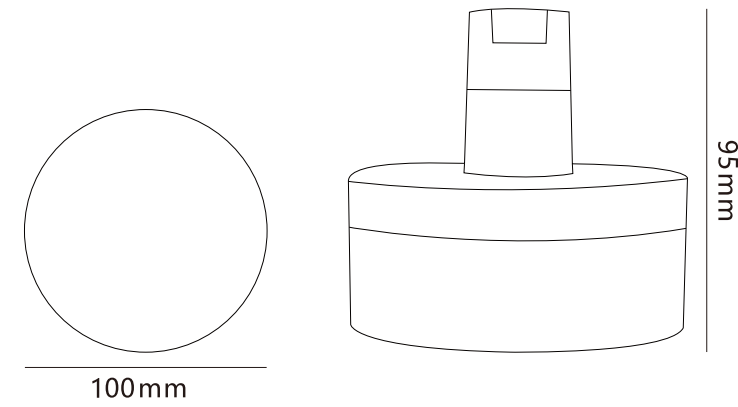

Semi flexible acrylic floodlight


Power
6W

Luminous Angle
120°

Size
100*95 mm



The color of the track shell/track strip can be freely changed

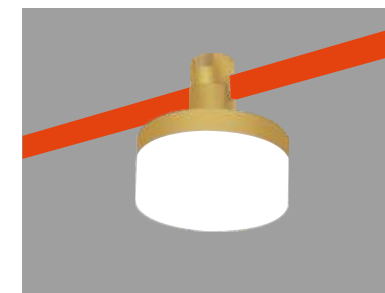

Voltage: DC48V



CRI: ≥90



Colour: Black/White/Gold



Material: Aluminum +PC




No flicker: < 3%



Optics: PC module



Specification sheet of Lighting products

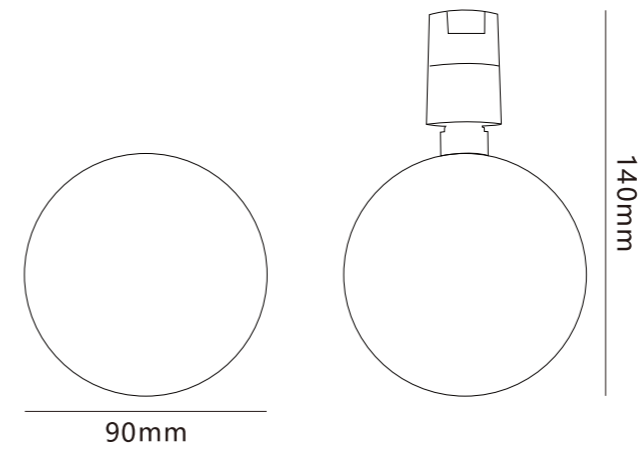

Semi-flexible circular disc floodlight

Power
10W

Luminous Angle
105°


Size
140*90mm



The lamp body can rotate



The color of the track shell/track strip can be freely changed

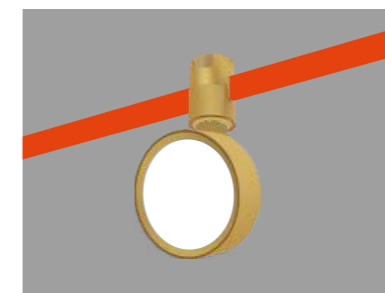

Voltage: DC48V



CRI: ≥90



Colour: Black/White/Gold




Material: Aluminum +PC



No flicker: < 3%



Optics: PC module

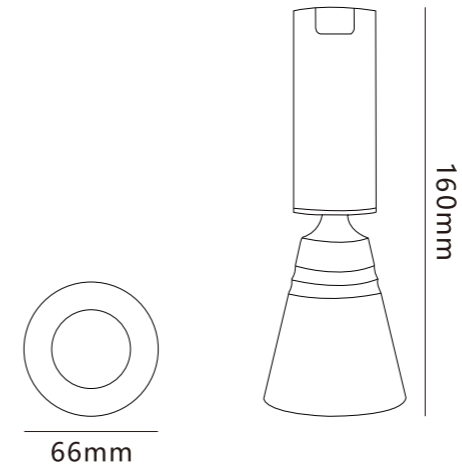

Semi-flexible conical spotlights

Power
7W

Luminous Angle
24°


Size
160*66mm



The lamp body can rotate



The color of the track shell/track strip can be freely changed

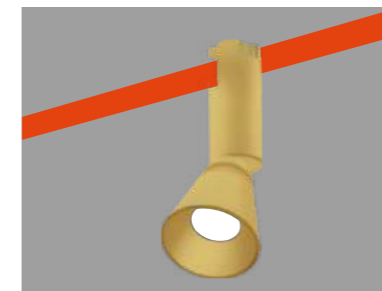

Voltage: DC48V



CRI: ≥90



Colour: Black/White/Gold



Material: Aluminum +PC




No flicker: < 3%



Optics: Lens

Specification sheet of Lighting products

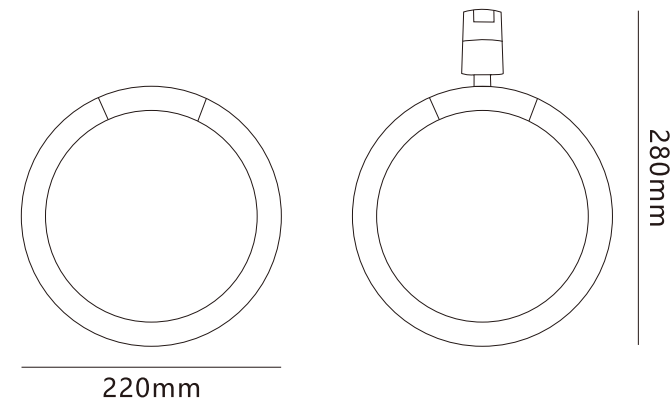

Circular lamp

Power
8W

Luminous Angle
360°


Size
220*280mm



The lamp body can rotate



The color of the track shell/track strip can be freely changed

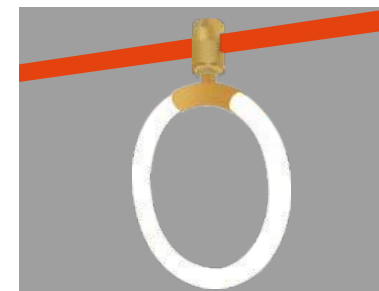

Voltage: DC48V



CRI: ≥90



Colour: Black/White/Gold



Material: Aluminum +PC




No flicker: < 3%



Optics: PC module

Specification sheet of Lighting products

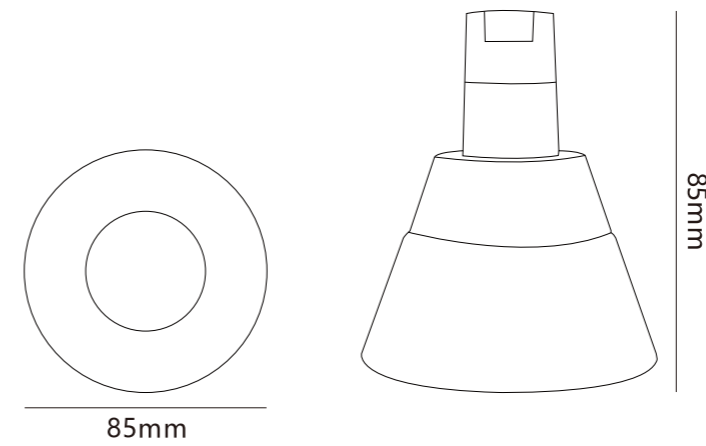

Acrylic hanging line lamp

Power
7W

Luminous Angle
105°

Size
85*85mm



The color of the track shell/track strip can be freely changed



Voltage: DC48V



CRI: ≥90



Colour: Black/White/Gold




Material: Aluminum +PC



No flicker: < 3%



Optics: Lens

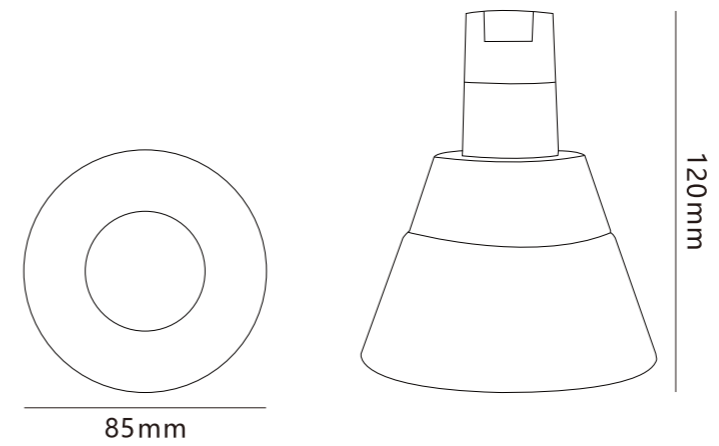

Semi flexible conical acrylic spotlights

Power
6W

Luminous Angle
105°

Size
85*120mm



The color of the track shell/track strip can be freely changed



Voltage: DC48V



CRI: ≥90



Colour: Black/White/Gold



Material: Aluminum + PC




No flicker: < 3%



Optics: Lens

Specification sheet of Lighting products

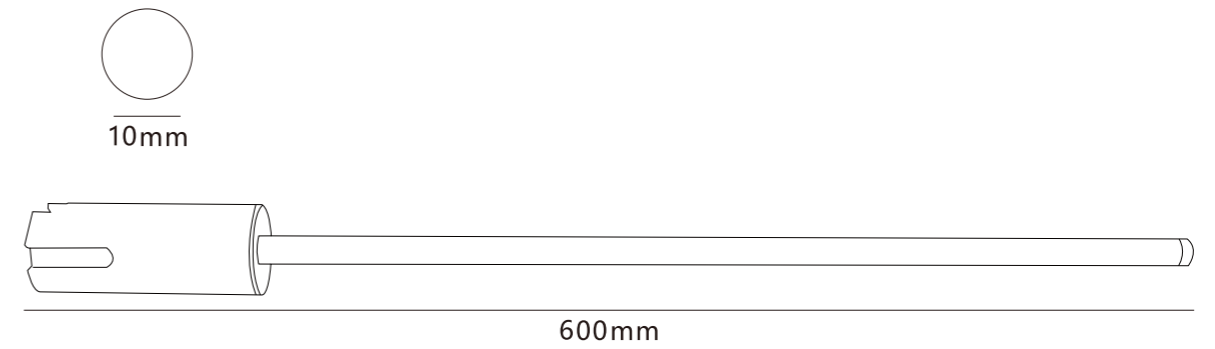

Semi flexible D12 long tube lamp

Power
2W

Luminous Angle
18°




Size
10*600mm



The lamp body can rotate



The color of the track shell/track strip can be freely changed

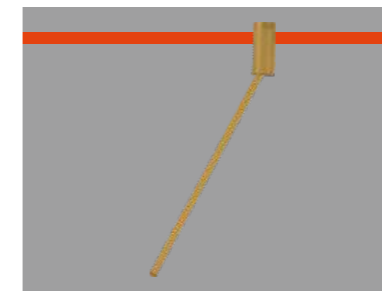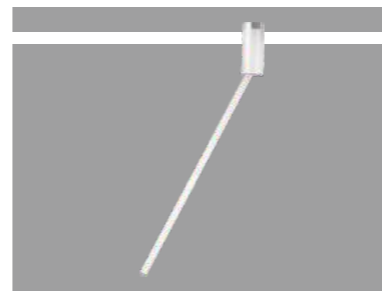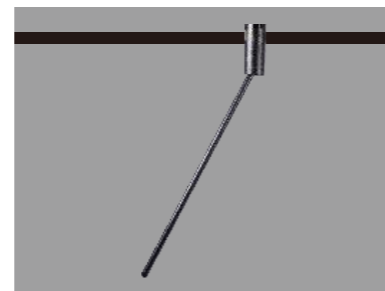

Voltage: DC48V



CRI: ≥90



Colour: Black/White/Gold



Material: Aluminum +PC




No flicker: < 3%



Optics: Lens

Specification sheet of Lighting products

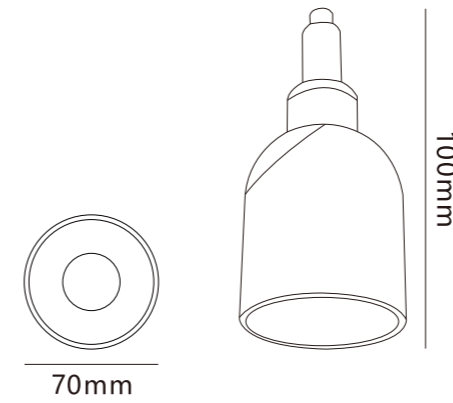

Universal hanging wire lamp


Power
7W

Luminous Angle
24°

Size
70*100mm



The color of the track shell/track strip can be freely changed

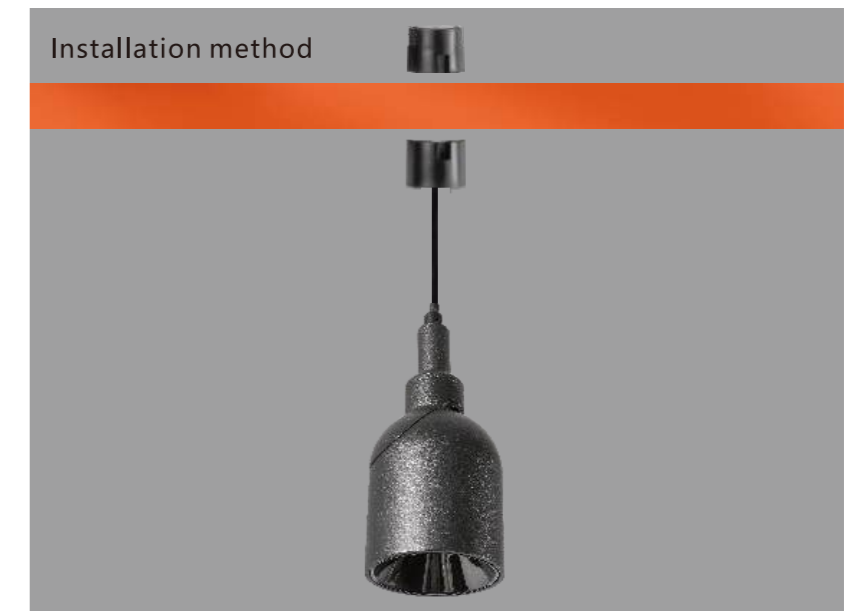

Voltage: DC48V



CRI: ≥90



Colour: Black/White/Gold



Material: Aluminum +PC




No flicker: < 3%



Optics: Lens

Specification sheet of Lighting products

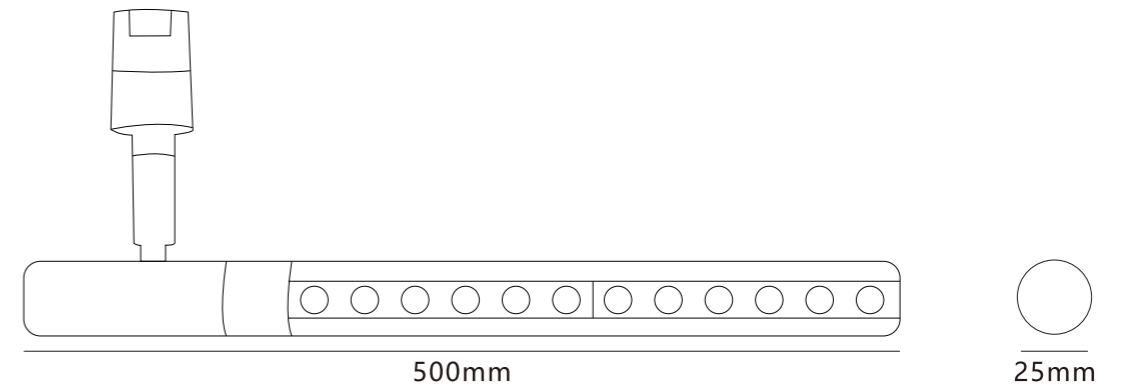

Spliced rotating spotlights

Power
15W

Luminous Angle
24°



Size
25*500mm



The lamp body can rotate



The color of the track shell/track strip can be freely changed

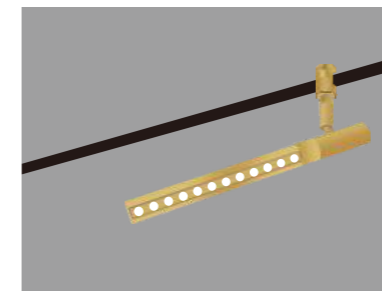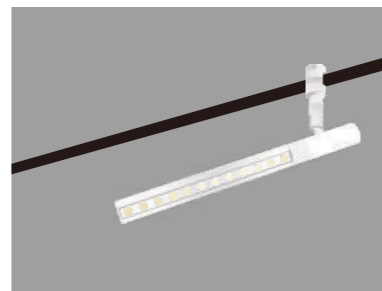

Voltage: DC48V



CRI: ≥90



Colour: Black/White/Gold



Material: Aluminum + PC




No flicker: < 3%



Optics: Lens



Specification sheet of Lighting products

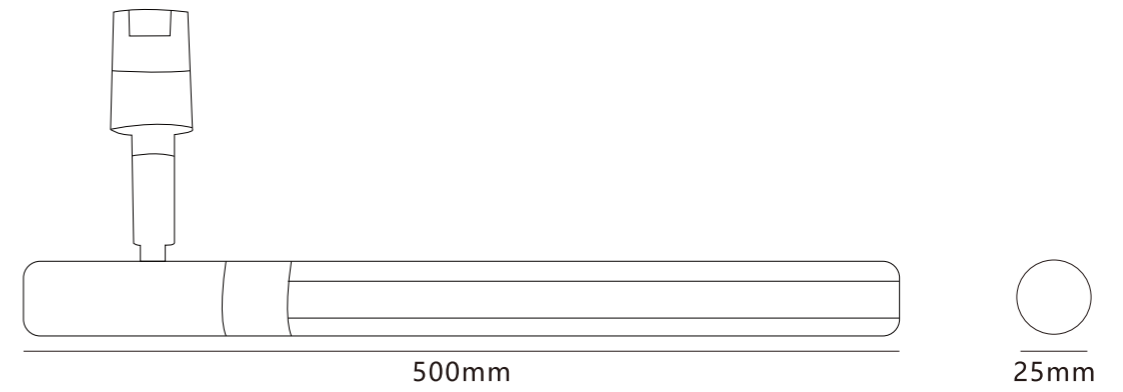

Spliced rotating floodlights

Power
15W

Luminous Angle
105°



Size
25*500mm



The lamp body can rotate



The color of the track shell/track strip can be freely changed

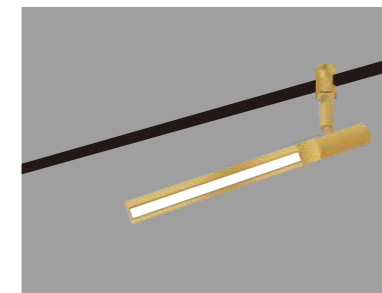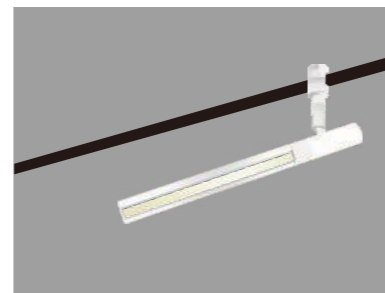

Voltage: DC48V



CRI: ≥90



Colour: Black/White/Gold




Material: Aluminum +PC



No flicker: < 3%



Optics: PC module

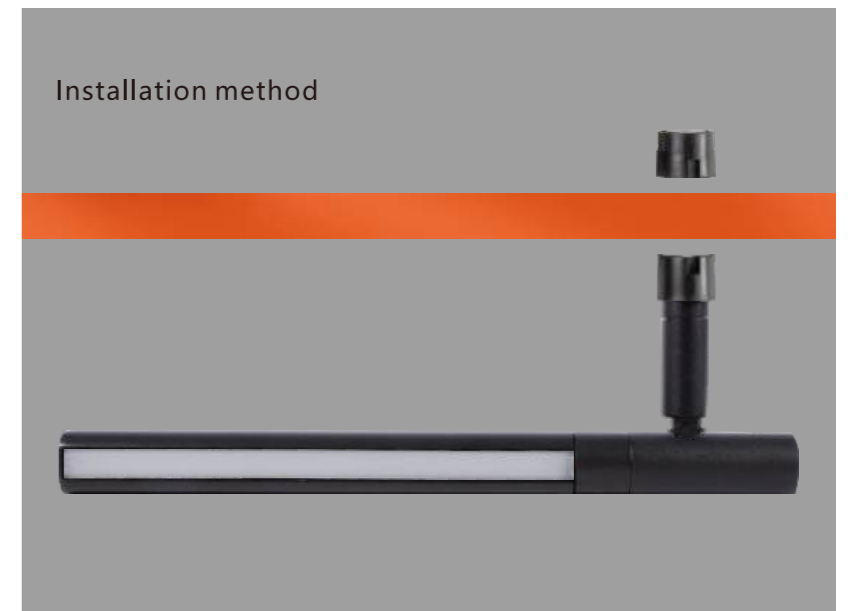



The relationship between light and space

With the power of light, complementing art, the fusion of light brings rich vitality to the parachute. In the changes of day and night, it alters the atmosphere of the entire space through subtle tones.

